



Furniture Fittings Systems

Important Information

Technical information

Our catalogue strives for information accuracy, but as our products are continually updated, we recommend verifying the latest specifications before placing an order. We retain the right to make unannounced changes due to ongoing product improvements.

User responsibility

Users are responsible for ensuring that our hardware suits their intended purpose. We suggest conducting appropriate tests and reaching out to our technical representatives for assessment.

Intellectual property

Titus Group possesses global intellectual property rights, including trademarks, patents, copyrights, designs, illustrations, drawings, and the proprietary knowledge embedded in our products' design and production. We also respect competitors' rights and other relevant product design rights. Our products are not known to infringe upon any intellectual property rights, but we take infringements seriously and will vigorously defend our rights within the bounds of the law.

Non-preferred articles

Items marked with * in the catalogue are non-preferred and may have extended delivery times.

Trademarks

Titus and Titusonic are registered trademarks of Titus International Ltd. Lama is a registered trademark of Titus d.o.o. Dekani. WoodWelding is a registered trademark of WW SA.

Cabinet Connectors

Cabinet Connectors

Product Guide

Page

System 1

Fittings for rigid assembly systems	a highly cost-effective and rigid assembly system for factory, consumer and home assembly	1.9
-------------------------------------	---	-----

System 2

Fittings for face-boring applications	face boring applications that provide a tolerant efficient assembly	1.11
---------------------------------------	---	------

System 3

Fittings for face and edge boring	two component rigid face and edge drilling fastening	1.13
-----------------------------------	--	------

System 4

Fittings for face-boring only	a range of low-cost one-piece fittings for high volume home assembly applications	1.15
-------------------------------	---	------

System 5

Cams and dowels	a comprehensive range of cam and dowel connecting fittings for all cabinet applications	1.21
-----------------	---	------

System 6

Quickfit-Expando connectors

face boring expanding
connectors for all cabinet
applications

1.45

System 6.2

Expando connectors for face boring

face boring connectors for
closets and wardrobes

1.57

System 7

Heavy duty cams and dowels

high quality fittings for offices
and public furniture

1.67

Cabinet Accessories

Complementary and structural support fittings

Shelf Q-Peg

1.73

Shelf supports

1.74

Joining plates

1.77

Backfix

1.78

Back wall connectors

1.79

Panel brackets and wall
connectors

1.80

Adjustable cabinet legs

1.81

Drawer front adjuster

1.85

Why Choose Titus?

Titus connectors add value to furniture and to furniture manufacturing

Titus connectors improve the quality of furniture and lower the cost of manufacturing and assembly while ensuring a high degree of customer satisfaction.

The most advanced range of connectors available on the market

Precise and efficient product design. **The broadest possible range of drilling tolerances** ensures reliable assembly and consistently strong joints. **'Klix'** locking feature, the engagement of interlocking teeth on cam and dowel, to prevent joint loosening in service or transit.

Expanding function provides degrees of variation in out-of-tolerance drillings ensuring stronger joints and improved quality of furniture.

Twinstart thread for faster and more stable insertion.

Depth stop collar prevents over-insertion.

Firm tightening for greater confidence in use.

Cam locks at 230° assuring smooth tightening action and greater dowel pull-up.

Quickfit for hand dowel insertion.

Quickfit TL5, new generation steel dowel with quickfit expando technology for insertion in Ø5mm dowel holes.

Quickfit TL2, TL4 with the built-in self adjustment feature for higher drilling tolerances.

Quickloc one piece fitting for faster assembly with integrated expanding cam and dowel.

Zinc+steel dowel for optimal strength and performance.

Precise dowel manufacturing high precision of zinc and strength of steel assures 100% dimensional accuracy.

Easy and quick consumer friendly self-assembly of furniture

Self-assembly furniture offers consumers good value and instant availability of products.

With the aim of providing consumer with simpler instructions, fewer parts and an easier assembly process, Titus has significantly reduced and simplified the number of fittings traditionally required in furniture production.

Titus connectors provide consumers with easy assembly and furniture producers with increased productivity:

- reduced number of assembly parts
- easy assembly instructions
- security of packed parts during transit

CAF

Quick & Easy

Consumer Assembly Friendliness

Connectors

Information

Easy and Quick Furniture Assembly

CAF formula

CAF=Consumer Assembly Friendliness

Titus CAF formula provides a comparative measure for customer satisfaction. By using it manufacturers are able to evaluate their products internally or against those of their competitors.

While offering consumers easier and faster assembly, there are obvious advantages also for furniture manufacturers – buying, counting, bagging and stocking of fittings can be greatly reduced.

Total quantity
of parts

5 8 6 3 7
6 1 5 2 4
1 6 9 7 1
8 2 1 5 4 9

+ Actions
to assemble



× Number of
types of parts

1 2 3 4 5 6
1 2 3 4 5
1 2 3 4
1 2 3
1


(T+A)N = CAF

Minimise the numbers in the
Titus CAF™ formula
to achieve:

- High customer satisfaction
- Improved productivity
- Higher profits

How does it work?

Comparative CAF scores
to assemble a hand held
demonstrator



	T	A	N	CAF
Connecting screw (traditional assembly)	4	38	3	126
Cam & dowel with single start thread	6	21	4	108
Cam & dowel with twinstart thread	6	15	4	84
Cam & TL2 dowel (self-assembly)	6	7	4	52
Cam & TL2 dowel (factory pre-inserted)	2	3	2	10
Quickloc	2	3	1	5
Fully assembled demonstrator	1	0	1	1


Cabinet Connectors

CAF Quick & Easy

Consumer Assembly Friendliness


Consumer Assembly Friendliness - CAF principle

- Quick assembly with less parts and less assembly steps
- Simple instructions
- Easy and intuitive assembly

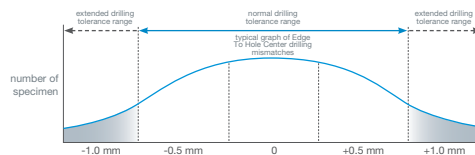


High drilling tolerances

- Optimal cabinet joint even in cases of inaccurate drilling
- In-built self adjustment feature ensures perfectly aligned and precise joints

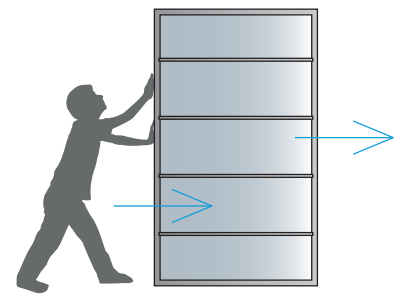


Strong and reliable joints

- High performance joints
- Great cabinet strength even at repeatable assembly or disassembly
- Enhanced resilience even in more demanding applications in tall wardrobes or office furniture




Reliable and comfortable locking

- Smooth and firm tightening at 2 o'clock lock
- Great dowel pull-up for optimal performance
- Strong and reliable joint

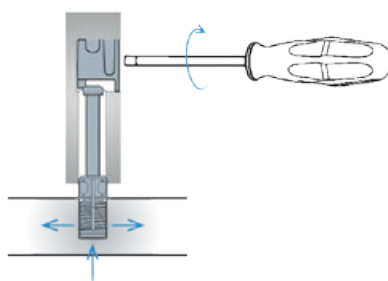

Expando function

- Expanding sleeve on dowels assures high resistance to pull-out
- Firm fixing in the dowel hole

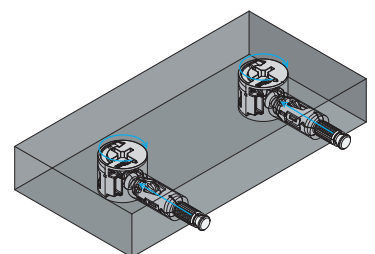

Factory pre-insertion

- With Quickfit TL5 and TL2 dowels
- Perfect for RTA market: easier packing and transportation
- The insertion of cams and dowels can be automated using Lama FastFit machine


System 1

Fittings for Rigid Assembly Systems

System Features

Double locking carcass screw

- Zinc diecast for precision
- Titus Double locking carcass screw makes an almost invisible connection
- Collar under the head to pull panels together
- 2nd 'lower' thread pulls against a 'faster' thread to provide maximum connection force and prevents overdriving of fastener
- Almost invisible in position
- Head can be 'fastcapped' or filled




System 1

Fittings for Rigid Assembly Systems

Double Locking Carcase Screw

- High performance from widely spaced primary thread
- Finer secondary thread provides additional holding power and positive stop (no override)
- Increased support for vertical panel is gained from the funnel head with collar at its base
- One-piece fitting



Technical and mounting details




Item number

Zinc


Screw 6x42

00180


885

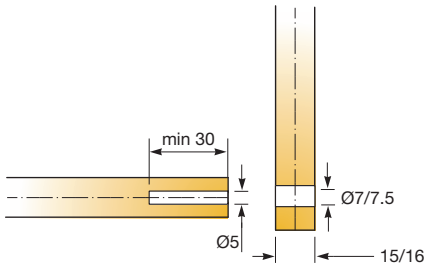


1. Insert screw to shoulder in face board



2. Screw into Ø5mm hole



3. Board joint pulled up by collar on screw



4. Board locked in place by screw

 1000 Pcs

Made of zinc


System 2

Fittings for Face-boring Applications

System Features

A family of face boring only fasteners with wide tolerances and the high clamping force of an angled screw.





- Factory or site component installation
- Wide tolerances
- Face boring only
- For kitchen, furniture storage, office and store fixture applications
- Non twist rail fastener versions
- Screw fastening or hammer insertion

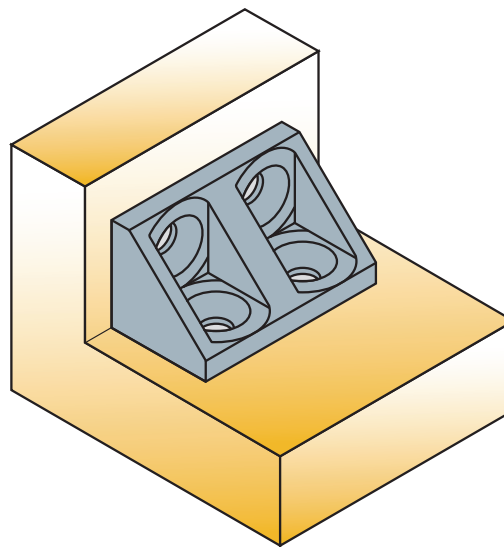

System 2

Fittings for Face-boring Applications

- Range of fixing blocks for multiple applications
- Face drilling only required
- Durable plastic material is flexible providing greater holding power
- Choose screw fastening or hammer insertion

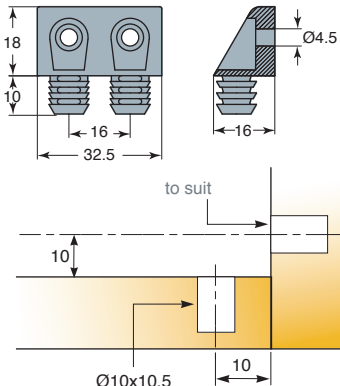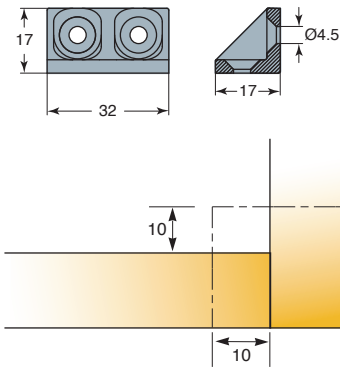		Technical and mounting details						
Rail fastener			Item number	Dark brown	Light brown	Ivory	White	
2000 Pcs		Made of plastic	02075 →	831	867		877	
Housing (no nose)				02077 →			875	877
2000 Pcs		Made of plastic						
Modesty block				*06073 →		867		877
1500 Pcs		Made of plastic	*European market only					


System 3

Fittings for Face and Edge Boring

System Features

Titus System 3 is a two component rigid face and edge drilled fastening with half turn to fasten. System 3 offers almost full concealment and wide tolerances in use.

- Automatic or in-factory placement
- Pre-location pin ensures ease of assembly
- Less than one turn of a screwdriver to fasten
- Shelf edge installation of pin means maximum shelf cut size tolerance
- Can be used on 12mm shelf panels
- No loose parts for maximum convenience in RTA
- Drawer front fixing, cabinet construction




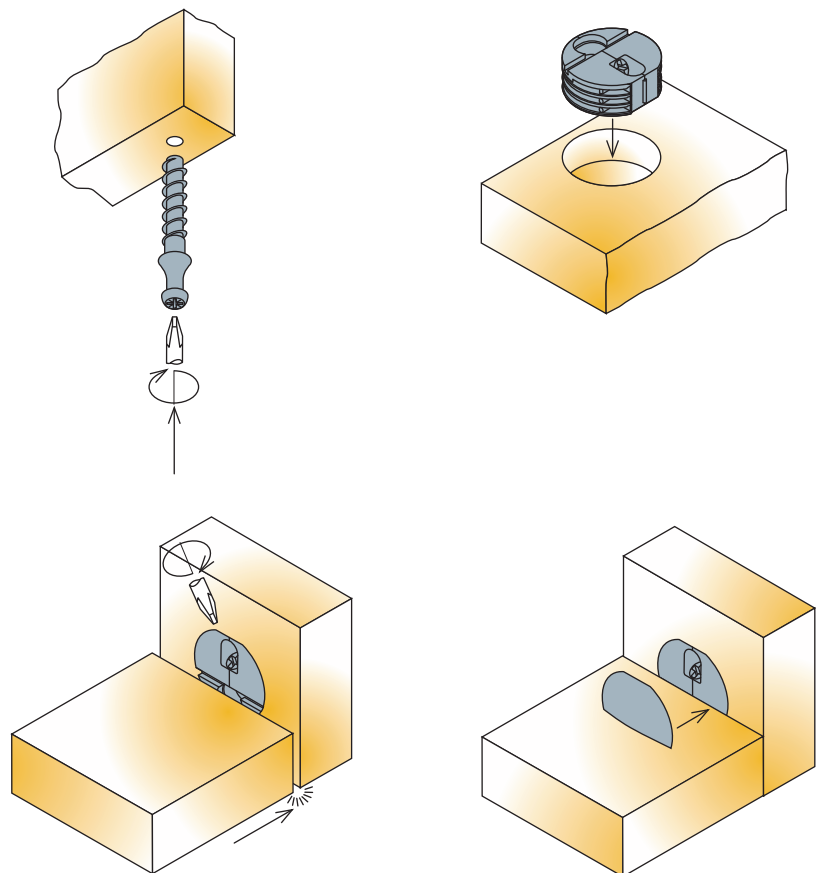


System 3

Fittings for Face and Edge Boring

Concealed Housing

- One turn locking system reduces assembly time, both in the factory and home
- Pre-assembly feature for consumer convenience
- Choice of dowels to suit drilling
- Hi-Lo screw feature for faster insertion

Technical and mounting details		C	D	D2					
		Drilling length for dowel	Drilling depth for housing	Drilling diameter for dowel thread	Item number	Black	Zinc plated	Dark brown	Yellow passivate
									
Housing assembly   X, Y - depends on board thickness		12.5			03118 →	835		831	877
 2500 Pcs Made of plastic or zinc, plastic		Other colours on request							
Screw dowel Ø5   X, Y - depends on board thickness		30		5	03168 →		883		
 1000 Pcs Made of zamak									
Screw dowel Ø3   X, Y - depends on board thickness		11		3.75	03181 →				881
		9		3	03180 →				881
		25		3	*03090 →		883		
 5000 Pcs (03180) 4000 Pcs (03181) 1000 Pcs (03090) Made of steel		*American market only							
Cover cap 					03150 →	835			877
 15000 Pcs Made of plastic									

System 4 Fittings for Face-boring Only

System Features

Cost effective one piece fittings with face boring benefits

- Flush and block components
- Face-boring only
- Good tolerances
- One piece connectors
- Angledriv versions fastening with maximum driving power and flexibility
- Quickloc™ versions need only one turn to tighten for fast assembly
- Foolproof consumer home insertion


Quickloc™ One-piece connector

The integrated housing and dowel make Quickloc™ the most user-friendly and tolerant product available.


- High degree of drilling tolerance
- Push-in design
- Tool-free insertion
- Integrated expanding housing and dowel provide consistently stronger joints
- 'Klix' locking system

Quickloc™ Assembly


1. Press Quickloc into the face board



2. Assemble the panels

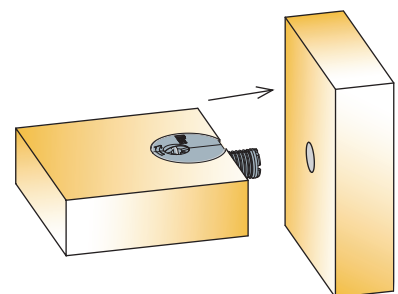

3. Tighten in less than one turn








System 4

Quickloc™

One Piece Expanding Connector

- An innovative, one-piece connector, capable of hand insertion
- Highly tolerant and tightens in less than one turn
- Face-bored product
- Offers a high degree of drilling tolerance and is the only connector of its type to provide pull-up of cabinet panels when tightened

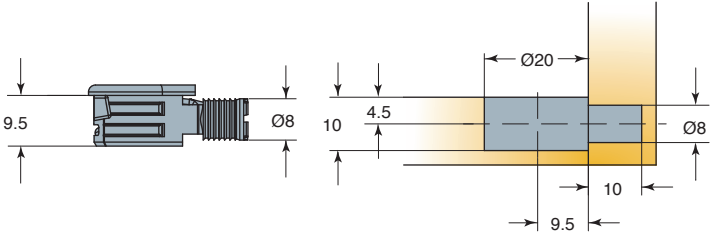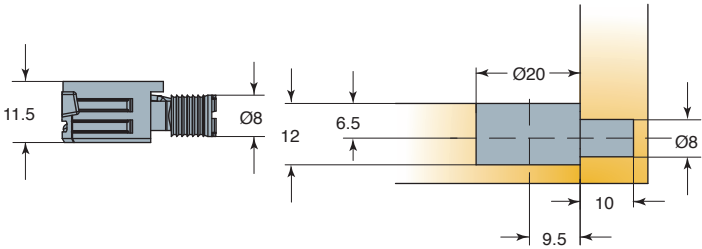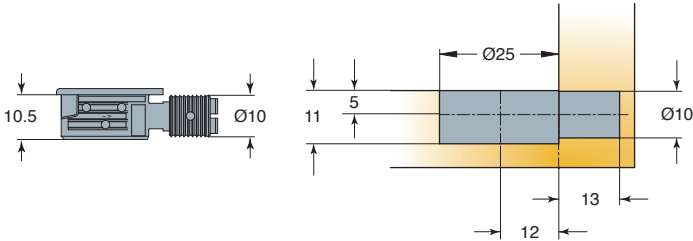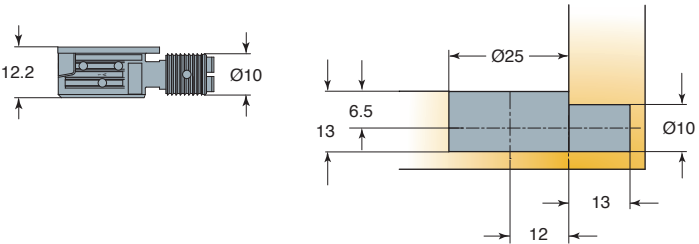		   Dark brown Black White		
Technical and mounting details		Item number		
Quickloc Ø20 flanged    2500 Pcs Made of zinc, plastic		06803 →	831	835 877
Quickloc Ø20 flush    2500 Pcs Made of zinc, plastic		06806 →	831	835 877
Quickloc Ø25 flanged    1500 Pcs Made of zinc, plastic		06802 →	831	835 877
Quickloc Ø25 flush    1500 Pcs Made of zinc, plastic		06839 →	831	835 877








System 4

Fittings for

Face-boring Only

Flushbloc™ / Flushfix™

- The Angledriv screw provides high level of tolerance
- Face drilling only required
- Corner joint and shelf fixing options

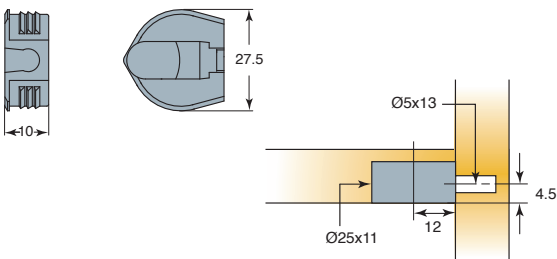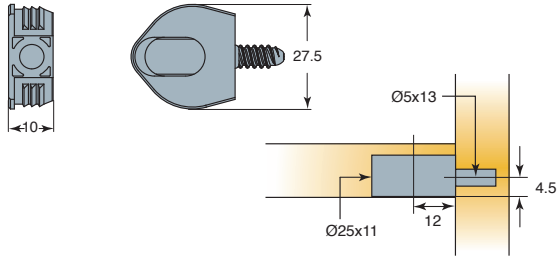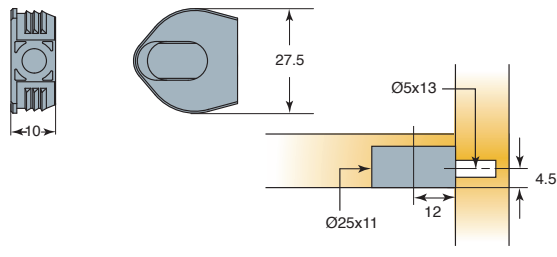							
Technical and mounting details		Item number	Brown beige	Black	Silver	White	Zinc
Flushfix™  		02161 →	806		861	877	
 2500 Pcs Made of plastic		Other colours on request					
Flushbloc™ with screw  		02193 →		835		877	
 2000 Pcs Made of zinc and plastic		Other colours on request					
Flushbloc™ assembly  		*02190 →		835		877	
 2500 Pcs Made of plastic		* American market only Other colours on request					
Angledrive screw for use with Flushfix™   		round head 00021 →					885
 2000 Pcs Made of zinc		flat head 00022 →					885






System 4

Fittings for

Face-boring Only

Minibloc™ / Twinbloc™

- One-piece connector range
- Face drilling only required
- Easy to use, foolproof home insertion
- Angledriv screw tolerates good levels of inaccurate drilling increasing consumer confidence

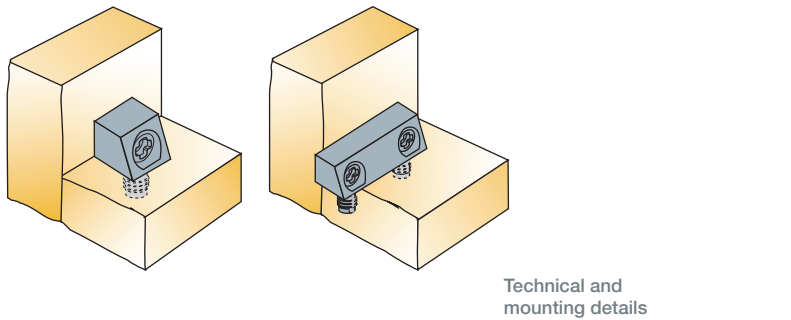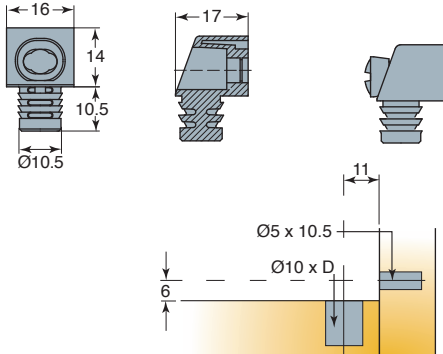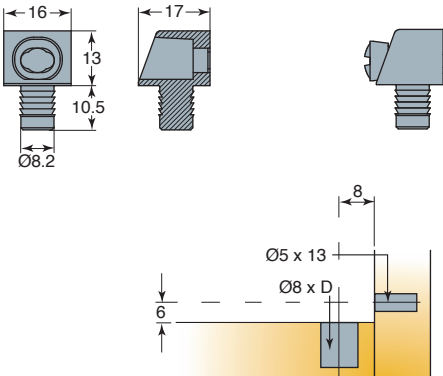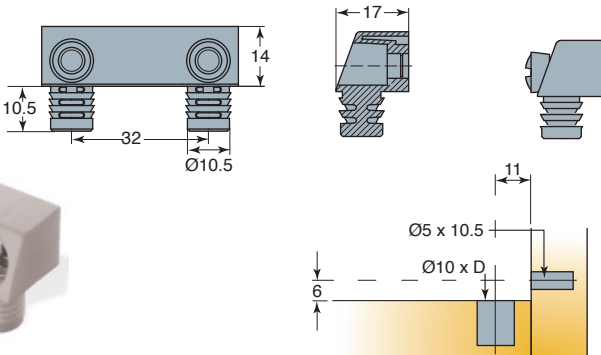								
D	Drilling depth	Item number						
			Dark brown	Black	Silver	White		
 Technical and mounting details								
Minibloc Ø10  2500 Pcs (02107) 3000 Pcs (02120) Made of zinc, plastic  Technical drawing of Minibloc Ø10 showing dimensions: 16, 17, 14, 10.5, Ø10.5, 11, Ø5 x 10.5, Ø10 x D, 6.								
11	02107 →	831	835	861	877			
11	* 02120 →	831	835	861	877			
* Assembly with screw Other colours on request								
Minibloc Ø8  3000 Pcs Made of zinc, plastic  Technical drawing of Minibloc Ø8 showing dimensions: 16, 17, 13, 10.5, Ø8.2, 8, Ø5 x 13, Ø8 x D, 6.								
11	02141 →		835	861	877			
11	* 02144 →		835		877			
* Assembly with screw * European market only Other colours on request								
Twinbloc Ø10  1000 Pcs Made of zinc, plastic  Technical drawing of Twinbloc Ø10 showing dimensions: 17, 14, 10.5, 32, Ø10.5, 11, Ø5 x 10.5, Ø10 x D, 6.								
11	02130 →		835	861	877			
11	* 02139 →		835		877			
* Assembly with screw Other colours on request								


System 4

Fittings for

Face-boring Only




Cambloc

- Screw-on and knock-in versions are available
- Plastic housings are available in different colours
- Quick and intuitive assembly when fittings are pre-mounted on furniture



Technical and mounting details

Screw-on



Item number

279-9187

Zinc plated
+ white housing

960

Zinc plated
+ brown housing

970

Zinc plated
+ black housing

980

1000 Pcs

Made of plastic, zinc cam

System 5

Cams and Dowels

System Features

The most advanced cam and dowel range

Titus System 5 is a comprehensive range of cam and dowel connecting fittings with 'Klix' and Quickfit features for all cabinet applications: panel-to-panel, panel-to-hollow profile, back-to-back

Dowels

- **Quickfit TL5, 'Full metal jacket'**
a high performance Quickfit dowel for use in multiple wooden materials
- **Quickfit TL2, TL4, TL5 dowels**
a unique solution for factory pre-insertion, high level of drilling tolerances


- **Quickfit dowels**
quick hand insertion, easy assembly
- **Diecast dowels (zinc)**
precise manufacturing, optimal shape and design
- **Turned dowels (steel)**
'traditional' design, smooth surface, best strength performance
- **Combi dowels (zinc and steel)**
high precision of zinc, strength of steel, 100% dimensional accuracy and optimal performance

Titus 'Klix'™

Titus 'Klix' locking system ensures the engagement of the interlocking teeth on cam and dowel providing:


- vibration-proof joint
- rigid construction that will not loosen in service or transit

Dowel insertion time comparison

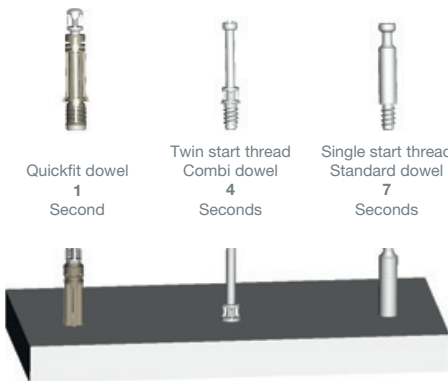

2 o'clock lock Smooth closing



Linear cam profile assures smooth, firm tightening action and greater pull-up. The cam always locks at 2 o'clock lock (230°), enabling greater consumer confidence in use while improving furniture quality.





Drilling tolerances

Optimal performance and perfect joint even with inaccurate drillings.



Zinc/Combi dowel

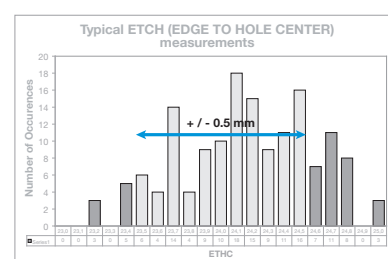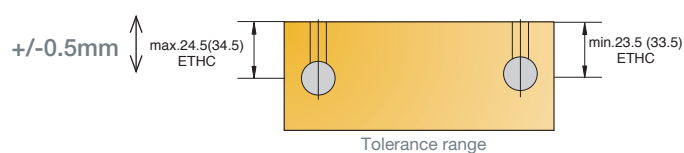

Quickfit TL5 dowel, Quickfit TL2 dowel

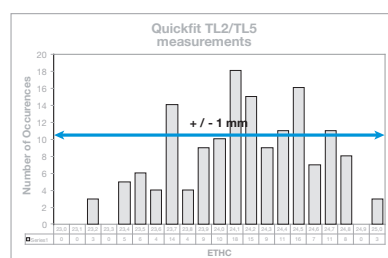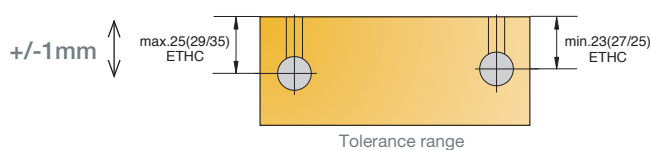

Quickfit TL4 dowel

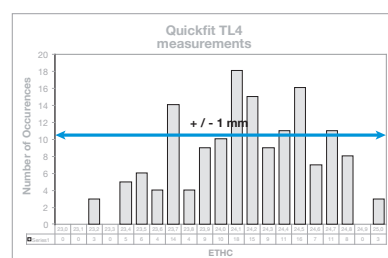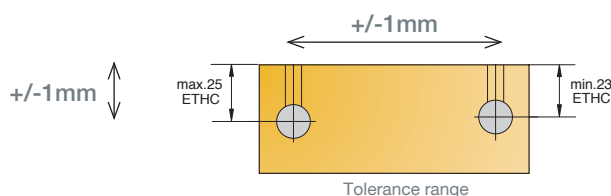


ET HC=Edge To Hole Center

Quickfit dowels for factory insertion

Quickfit TL5, Quickfit TL4, and Quickfit TL2 are the only dowel solutions designed for factory pre-insertion

- Optimised packaging processes
- Reduced risk of quality issues and claims
- Ideal for the RTA market

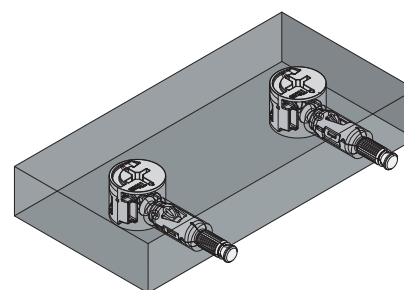

System 5

Cams and Dowels

Cam5000

Highly resistant joint for strong cabinet construction

Reinforced cam evenly engages the hole and prevents cam tilting and cam bursting.

Increased joint resistance enables effective performance in wider tolerance range.



Linear cam profile

Linear cam profile ensures:

- Smooth tightening action
- Greater dowel pull-up



Cam retaining pips

Cam retaining pips ensures:


- The cam is held in position prior to assembly
- Secure cam positioning during transport and handling
- Accurate factory insertion



2 o'clock lock


Smooth and noticeable locking at the 2 o'clock position guarantees:

- always-right tightening for home assembly
- strong and rigid cabinet construction

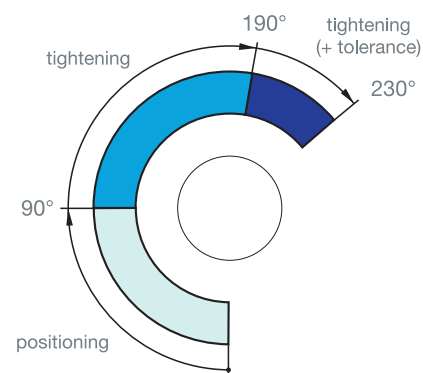

Optimised cam profile

Optimised cam profile ensures smooth and tight joint with no gap between panels.

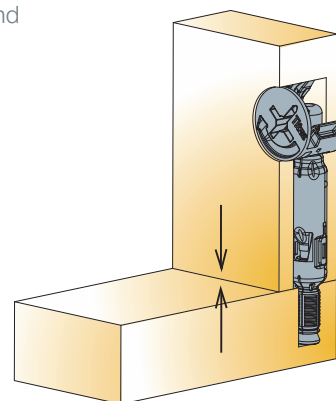

Optimal performance with all Titus dowels

Quickfit TL, Quickfit, Combi, end, double ended, angled and other screw-in dowels



System 5

Cams and Dowels


Quickfit Connectors

It is the fastest assembly system on the market. The Quickfit™ dowel may be inserted by hand, using only finger pressure. This eliminates the labour intensive process of screw-in assembly and the potential panel damage.


The Quickfit™ range of dowels has been extended to provide a complete family of fittings available in diameters of 5mm, 8mm, 10mm and lengths of 24mm and 34mm. These dowels are compatible with the range of Titus Ø15mm cams.

Assembly


1. Press the cam into face board





2. Insert the dowel into side panel

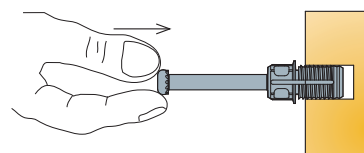


3. Assemble the panels



4. Tighten the cam to lock dowel



5. Assembled panels

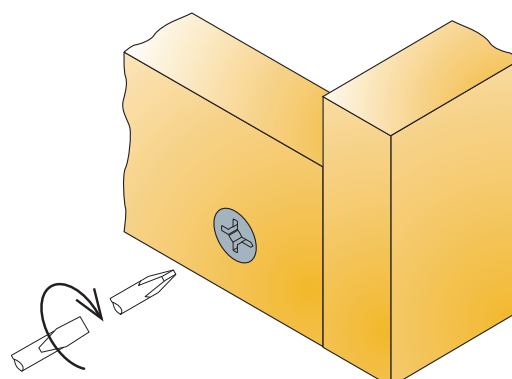

Quickfit TL Connectors

Quickfit-TL™ dowel offers furniture manufacturers a fast assembly system providing high drilling tolerances. It has a built-in self-adjustment feature, which enables common drilling inaccuracies to be overcome.

For the self-assembly furniture consumer, Titus Quickfit-TL™ is the most consumer friendly fitting on the market. Apart from the benefit of fully tightened joints and easy locking into the same position, Quickfit-TL™ provides an exceptionally smooth action when tightened, requiring very little effort.


Drilling tolerances

Marginal inconsistencies of drilling and the problems associated with the natural movement of wood panels, no longer present problems.


Quickfit-TL™ provides a tolerance of ± 1 mm on drilling operation while ensuring that the final result is a perfectly precise and aligned joint. No other assembly fittings system can offer such tolerances and still maintain a perfect joint.

Assembly


1. Press the cam into face board




2a. Either push dowel into edge hole or...

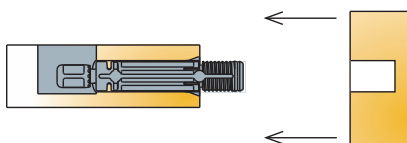


2b. Insert the dowel into side panel

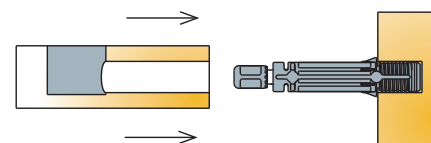

3. Assemble the panels

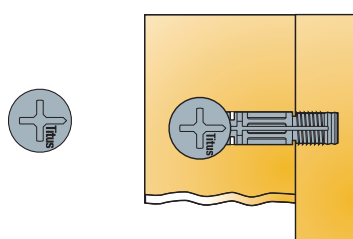

4. Tighten cam to lock dowel

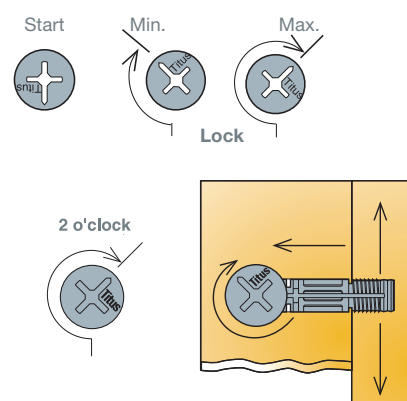

System 5

Cams and Dowels

Quickfit TL5 'Full Metal Jacket'

Effective performance in multiple wooden materials


Smooth and noticeable locking at the 2 o'clock position guarantees:

- tight joints
- always-right tightening at home assembly
- strong and rigid cabinet construction



Strong and reliable joint



Expanding steel sleeve assures high resistance to torsion and pull-out.



High drilling tolerances

An extended dowel head design works as a positive stop against the cam and provides an ETHC tolerance of min. ± 1 mm

Fully tightened joint assured even at marginal inconsistencies of drilling and problems associated with the natural movement of wood panels.

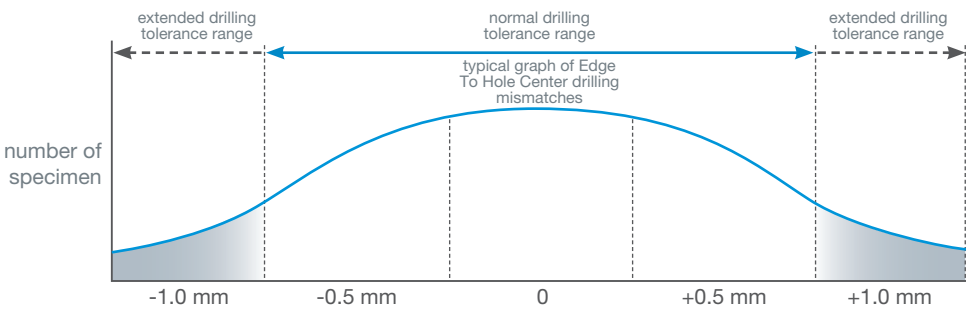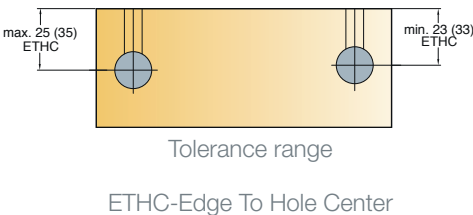


Shape of dowel sleeve

- Acts as a positive stop when face inserted
- Ensures correct insertion depth




Tool-free insertion for Ø5mm dowel holes

Quickfit TL5 reliably engages the 5mm dowel hole. It enables the usage of tool-less Quickfit dowel insertion technology across a wide range of applications.




50% less time to assemble the cabinet at home

When edge inserted the dowel engages the cam and remains securely positioned until the boards are locked together.

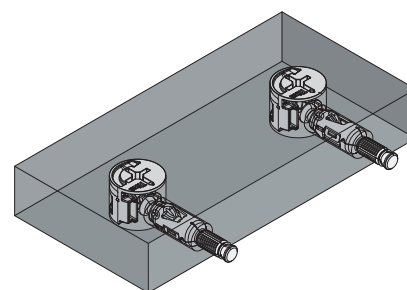

For maximum efficiency the insertion process can be automated using the Titus proprietary Lama FastFit machine.

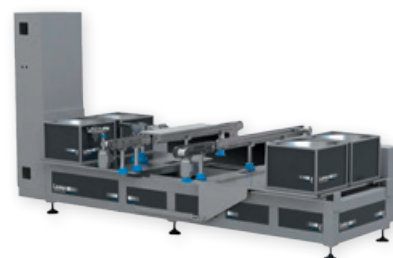

Fast and easy cabinet assembly at home.

CAF Quick & Easy

Consumer Assembly Friendliness

System 5


Cams and Dowels

Zinc+steel Combi Dowels

Zinc+steel
technology for
optimal strength
and performance


The Combi dowel combines steel and a small amount of zinc to ensure high precision and dimensional accuracy, essential to provide furniture manufacturers with the broadest possible range of drilling tolerances.

toroidal head form

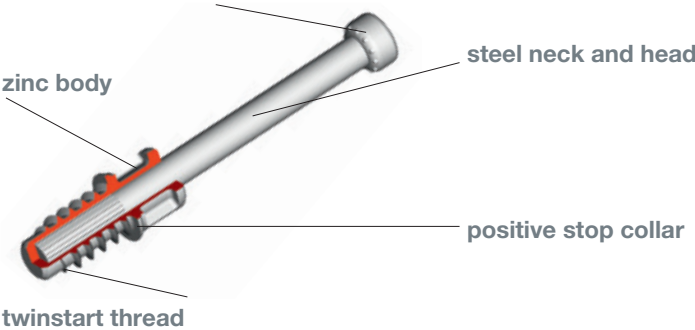


The steel neck and head provide better resistance to torsion and pull-out enabling a high performance joint

Zinc body:
Positive stop collar ensures correct insertion depth
Twinstart for faster and more stable insertion

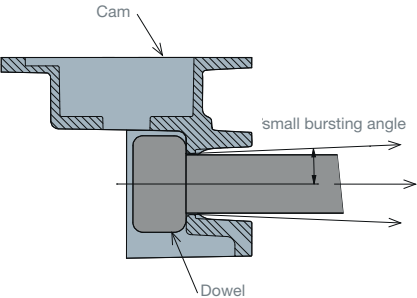

The toroidal dowel head form transfers the forces between cam and dowel more effectively resulting in a small cam bursting force.






100% dimensional accuracy
assured

System 5

Cams and Dowels

Quickfit TL5 'Full Metal Jacket'

- Drilling tolerances of +1/-1mm when edge inserted
- Expanding steel sleeve assures a strong joint, highly resistant to pull-out
- Tool-free insertion technology for Ø5mm holes in multiple wooden materials (chipboard, MDF, solid wood)
- For use with Cam5000



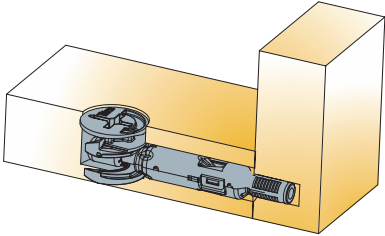
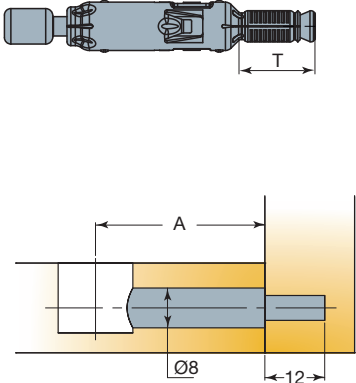
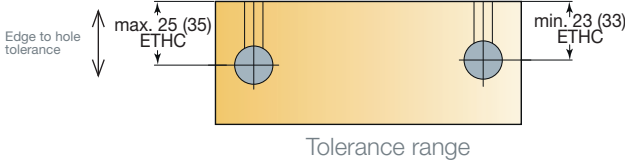
Technical and mounting details		A	T		
		Drilling distance	Thread length	Item number	TeraBlack
 Quickfit TL5 dowel   		34	11.5	09652 →	956
		24	11.5	09651 →	956
		i Suitable for Cam5000 only			
 1000 Pcs		Made of steel			

System 5

Cams and Dowels

Quickfit TL Dowels

- Available in Ø5mm and Ø8mm for panel-to-panel applications
- For use with all Cam3000 S and Cam5000 products
- ‘Klix’ locking feature provides a strong, vibration proof joint
- Highly tolerant in edge-inserted, TL4 also in face-inserted applications

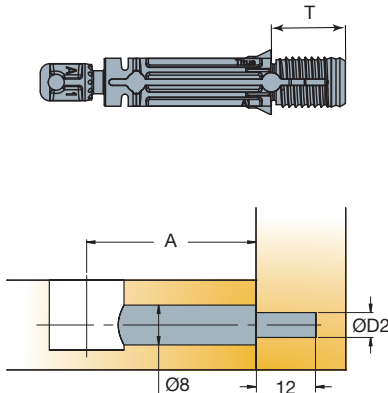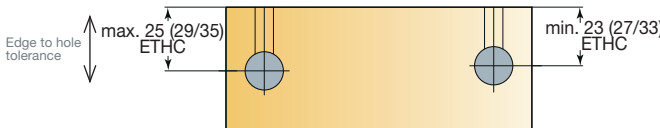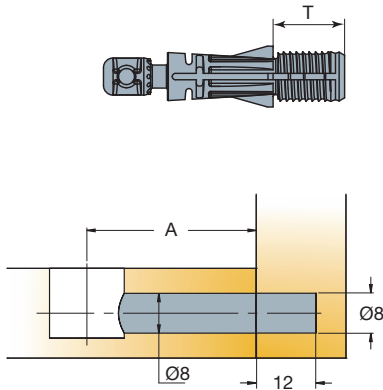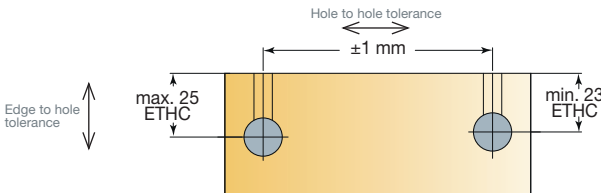	Technical and mounting details		A	T	D2						
Quickfit TL2  D2=Ø5mm  D2=Ø8mm  2000 Pcs 1000 Pcs (05474)			Tolerance range		Made of zinc, plastic	Drilling distance	Thread length	Drilling diameter for dowel thread	Item number	Black	Dark grey
	24	11.5	5	05453	→			880			
	34	11.5	5	05503	→			880			
	24	11.2	8	05366	→			880			
	28	11.2	8	05314	→			880			
34	11.2	8	05474	→			880				
Quickfit TL4   3000 Pcs			Tolerance range		Made of zinc, plastic	24	11.2	8	05388	→	835

System 5

Cams and Dowels

Quickfit Dowels

- Available in Ø5mm, Ø8mm and Ø10mm for panel-to-panel applications
- For use with all Cam3000 S and Cam5000 products
- 'Klix' locking feature provides a strong, vibration proof joint
- Depth stop collar for accurate insertion




Technical and mounting details		A	T	L	Item number	Dark grey
Drilling distance		Thread length		Total length		
Quickfit dowel Ø8mm		20	11.2	29.5	05556 →	880
		24	11.2	33.5	05563 →	880
		28	11.2	37.5	05552 →	880
		34	11.2	43.5	05554 →	880
1000 Pcs (05556,05552) 2000 Pcs (05563, 05554)						
Made of zinc, plastic						
Quickfit dowel Ø10mm		24	11.2	33	05052 →	880
		34	11.2	43	05050 →	880
2000 Pcs						
Made of zinc, plastic						
Quickfit dowel For back-to-back application Ø10mm		24	9	30.5	05270 →	880
		34	9	40.5	05147 →	880
1000 Pcs						
Made of zinc, plastic						

System 5

Cams and Dowels

Quickfit P2F Dowels

- The only product to enable standard panel drilling and connection of panel and hollow profile
- Available in Ø8mm for panel-to-hollow metal profile applications
- For use with all Cam3000 S and Cam5000 products
- 'Klix' locking feature provides a strong, vibration proof joint



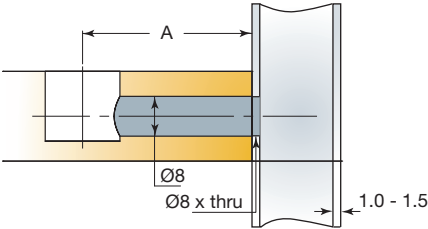
 Technical and mounting details	A		Black
	Drilling distance	Item number	
Quickfit P2F	24	05414 →	835
  			
 2000 Pcs Made of zinc, plastic			

System 5

Cams and Dowels

Combi Dowel

- High quality zinc-steel dowel with greater resistance to torsion and pull-out
- For use with all Cam3000 S and Cam5000 products
- 'Klix' locking feature provides a strong, vibration proof joint
- Twinstart thread for faster and reliable insertion

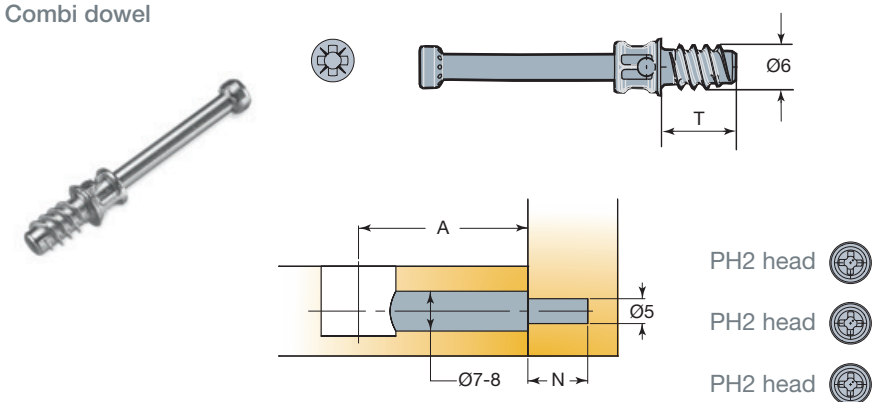
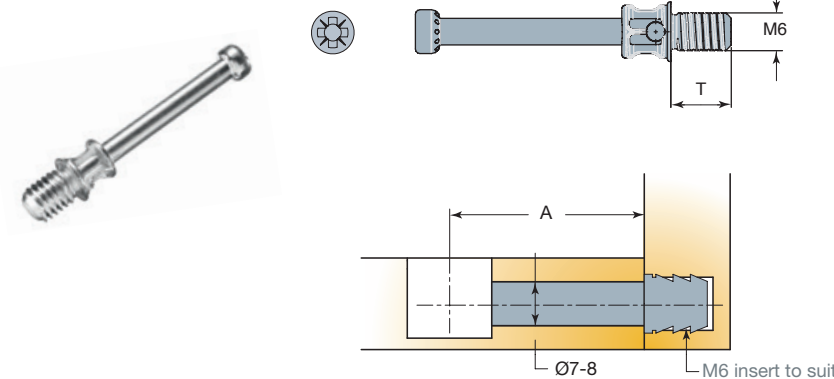
		A		N		T				
Technical and mounting details		Drilling distance	Drilling depth	Thread length	Item number			Zinc		
Combi dowel  1000 Pcs *2000 Pcs Made of steel and zinc		34	12	11	09435 →			885		
		28	10	9.5	09588 →			885		
		24	12	11	09443 →			885		
		24	9	8.5	09583 →			885		
		34	12	11	*09424 →			885		
		24	12	11	*09423 →			885		
		34	9	8.5	*09456 →			885		
		*American market only								
Combi dowel M6  1000 Pcs Made of steel and zinc		34		8	09592 →			885		
		34		10.5	09594 →			885		
Inserts Made of zinc		→ see page 1.70								
Inserts Made of plastic		→ see page 1.70								

System 5

Cams and Dowels

Combi Dowel

- High quality zinc-steel dowel with greater resistance to torsion and pull-out
- For use with all Cam3000 S and Cam5000 products
- 'Klix' locking feature provides a strong, vibration proof joint
- Twinstart thread for faster and reliable insertion

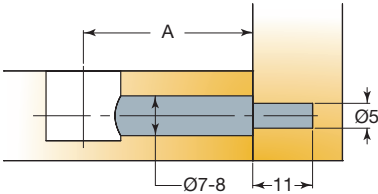				L	A
				Total length	Drilling distance
Technical and mounting details				Item number	
				Zinc	
Combi dowel Full body PZ2 head   				34.5	24
				09597 →	
				885	

1000 Pcs

Made of steel and zinc



Inserts

Made of plastic


→ see page 1.70

System 5

Cams and Dowels

Combi-P Dowel

- Full body assures a strong joint highly resistant to torsion and pull-out, even in low density chipboard
- Accurate insertion with positive stop

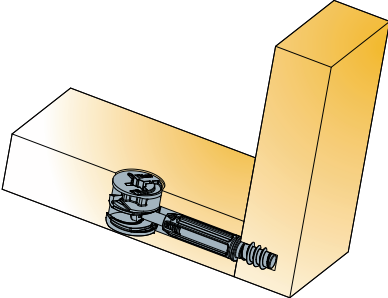 Technical and mounting details		A	N	T	L	Item number	Zinc plated
		Drilling distance	Drilling depth	Thread length	Total Length		
Combi-P Dowel  PH2 head  L T Ø6.2 PZ2 head  A Ø7-8 N Ø5							

 1000 Pcs






Made of zinc and plastic

System 5

Cams and Dowels

Double-ended Dowel

- Available in Ø7mm
- For use with all Cam3000 S and Cam5000
- No circlip for increased tolerance
- Available in a variety of lengths to suit most panel-to-panel applications

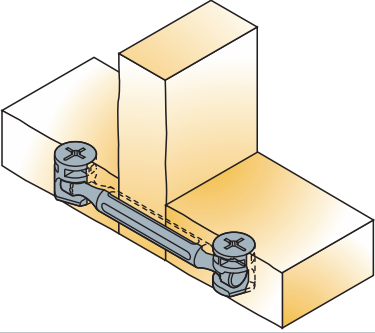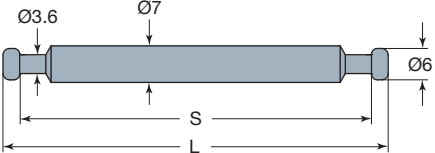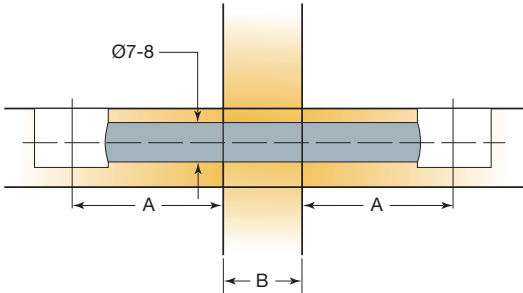
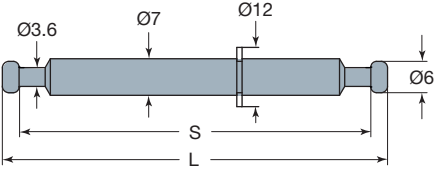
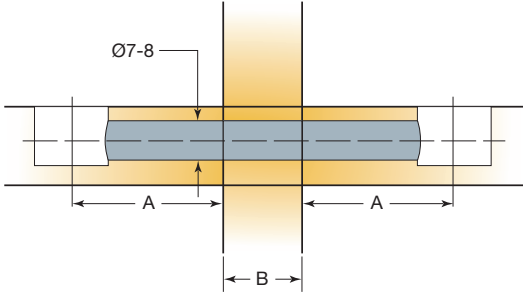
 Technical and mounting details		S	L	A	B		
		Length	Total length	Drilling distance	Panel thickness	Item number	Zinc plated
Dowel without circlip     250 Pcs (05753) 500 Pcs (05857) 1000 Pcs (05929) Made of steel		41	47.4	24	0*	05929 →	883
		61	67.4	34	0*	05757 →	883
		77	83.4	34	16	05858 →	883
		79	85.4	34	18	05859 →	883
		80	86.4	34	19	05753 →	883
		56	62.4	24	15	05592 →	883
		57	63.4	24	16	05857 →	883
		59	65.4	24	18	05380 →	883
		60	66.4	24	19	05778 →	883
		*B=0 → no panel required					
Dowel with circlip     250 Pcs 500 Pcs (05775, 05774) Made of steel		77	83.4	34	16	05752 →	883
		79	85.4	34	18	05772 →	883
		80	86.4	34	19	05751 →	883
		57	63.4	24	16	05775 →	883
		60	66.4	24	19	05774 →	883

System 5

Cams and Dowels

Angled Dowels

- For applications requiring angled joints
- For use with all Cam3000 S and Cam5000
- Adjustable angle from 90° to 180°

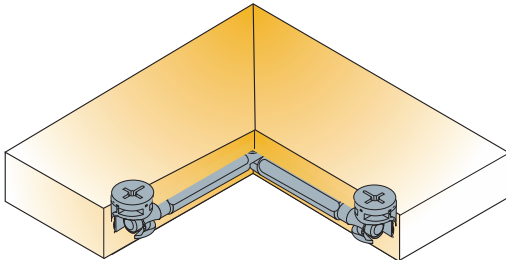
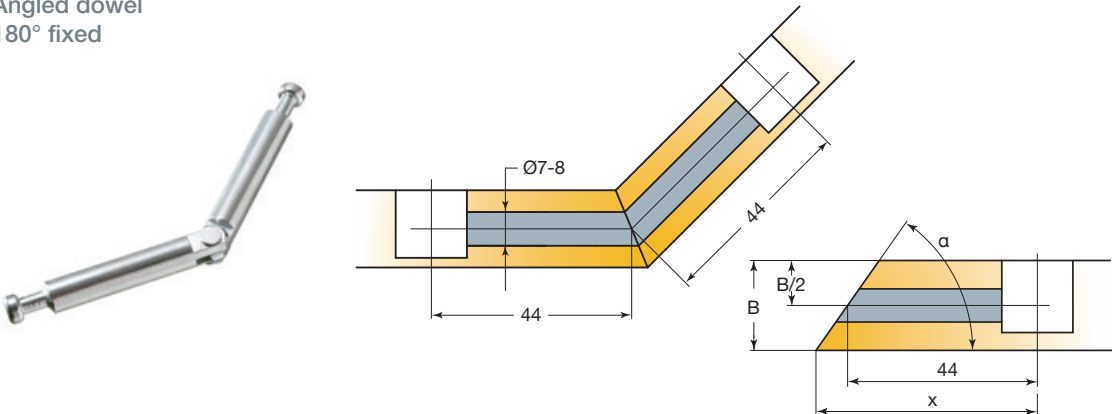
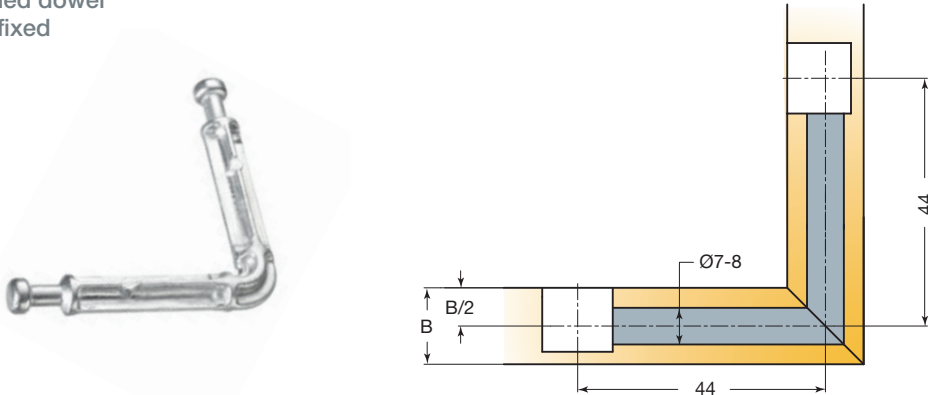
		Technical and mounting details		Item number	Zinc plated											
Angled dowel 180° fixed				05860 →	883											
Distance x in mm																
α	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	67,5°	70°	75°	80°	85°	
13	61.9	57.9	55.3	53.5	51.7	50.5	49.5	48.6	47.8	47	46.7	46.4	45.7	45.1	44.6	
15	64.6	60.1	57	54.7	52.9	51.5	50.3	49.3	48.3	47.5	47.1	46.7	46	45.3	44.7	
16	66	61.2	57.9	55.4	53.5	52	50.7	49.6	48.6	47.7	47.3	46.9	46.1	45.4	44.7	
B	18	68.8	63.3	59.6	56.9	54.7	53	51.6	50.3	49.2	48.2	47.7	47.3	46.4	45.6	44.8
19	70.1	64.4	60.5	57.6	55.3	53.5	52	50.7	49.5	48.4	47.9	47.5	46.5	45.7	44.8	
22	74.2	67.6	63.1	59.7	57.1	55	53.2	51.7	50.4	49.1	48.6	48	46.9	45.9	45	
23	75.6	68.7	63.9	60.4	57.7	55.5	53.6	52.1	50.6	49.4	48.8	48.2	47.1	46	45	x
 250 Pcs		Made of steel														
Angled dowel 90° fixed				05282 →	883											
 1000 Pcs		Made of steel														

System 5

Cams and Dowels

End Dowels

- Available in a variety of head and length combinations to suit most end panel applications
- For use with all Cam3000 S and Cam5000
- ‘Klix’ locking feature provides a strong, vibration proof joint
- Both ‘mushroom’ and countersunk headed versions available






		A	B	S	L		
		Drilling distance	Panel thickness	Length	Total length	Item number	Zinc
 Technical and mounting details Mushroom dowel   		24	16	36.5	40.5	05608 →	885
		24	19	39.5	43.5	05609 →	885
		34	16	46.5	50.5	05610 →	885
		34	19	49.5	53.5	05611 →	885
		24	12	32.6	37.3	05010 →	885
 500 Pcs (05610, 05611)  1000 Pcs (05608, 05609) Made of zinc							

System 5

Cams and Dowels

Cam5000 Ø15mm

- Improved central shape for highly resistant joint
- For use with all Titus dowels
- 'Klix' locking feature provides a strong, vibration proof joint
- Cam retaining pips ensure that a cam is held in panel position prior to assembly

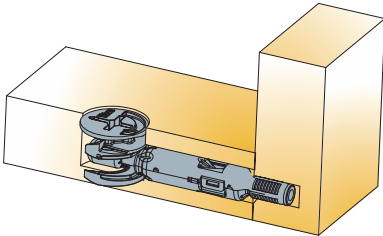




		B	D	e	h		
Technical and mounting details		Panel thickness	Drilling depth	Drilling for dowel	Cam height	Item number	
							Zinc
							Noir
Cam5000 cross drive	PZ2 drive 	12/13	10.5	6 min	9.9	09695 →	885
		15/16	12.5	7.5-8	11.9	09690 →	885
							
							
							
1000 Pcs		Made of zinc					
Cam5000 hexagonal drive	Combined drive with HEX 	15/16	12.5	7.5-8	11.9	09699 →	885
		18/19	14	9-9.5	13.2	09692 →	885
		22/23	16	11-11.5	15.2	09332 →	885
		25/26	18	12.5-13	16.7	09335 →	885
		28/29	19.5	14-14.5	18.2	09336 →	885
		Noir available upon request					
							
							
							
1000 Pcs 500 Pcs (9335, 9336)		Made of zinc					

System 5

Cams and Dowels

Cam5000 Ø15mm

- Improved central shape for highly resistant joint
- For use with all Titus dowels
- 'Klix' locking feature provides a strong, vibration proof joint
- Cam retaining pips ensure that a cam is held in panel position prior to assembly









		B	D	e	h			
		Panel thickness	Drilling depth	Drilling for dowel	Cam height	Item number	Nickel	Zinc
 Technical and mounting details								
Cam5000 headed cross drive PZ2 drive      1000 Pcs Made of zinc		12	10min	6	9.9	09330 →		885
Noir available upon request								
Cam5000 headed hexagonal drive Combined drive with HEX      1000 Pcs  500 Pcs (9337) Made of zinc		16	13	8	12.4	09333 →	847	885
		19	14.5	9.5	13.9	09334 →	847	885
		29	19.5	14.5	18.9	09337 →		885
Noir available upon request								

System 5

Cams and Dowels

Cam3000S Ø15mm

- Innovative design offers optimal performance with maximum cost effectiveness
- For use with Combi dowels, forged steel dowels and Quickfit dowels
- ‘Klix’ locking feature provides a strong, vibration proof joint
- Cam-retaining pips ensure that a cam is held in panel position prior to assembly



 Technical and mounting details		B	e	Item number		
		Panel thickness	Drilling for dowel			
Cam3000 S/15     1000 Pcs Made of zinc	PZ2 drive 	15/16	7.5/8	09491 →	885	897
Cam3000 S/12     2000 Pcs Made of zinc	PZ2 drive 	12 min	min 6	*09406 →	885	897
* European market only						
Cam3000 S/12     1000 Pcs Made of zinc	Philips PH2 drive 	12 min	min 6	*09631 →	885	
* American market only						
  Cover caps 09630 Made of plastic						

System 5


Cams and Dowels

Cam2000S Ø12mm

- For all Titus screw-in dowels
- Available in a variety of head, drive recess and board thickness versions to suit most applications
- Particularly suited to drawer front attachment applications
- ‘Klix’ locking feature provides a strong, vibration proof joint

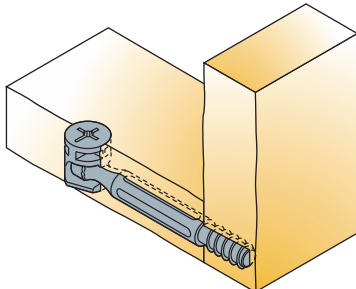
 Technical and mounting details							
B	D	e					
Panel thickness	Drilling depth	Drilling for dowel	Item number	Black painting plate	Nickel plated	Zinc	Corrosil zinc
12/13	10 min	6-6.5	05575 →	838	847	885	897
15/16	12	7.5-8	05578 →			885	
18/19	13 min	9-9.5	05580 →			885	
Other finishes on request							
i Not suitable for Quickfit TL5 dowels							



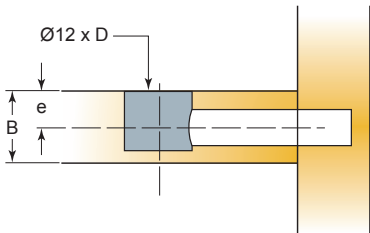


2000 Pcs

Made of zinc

 Technical and mounting details							
B	D	e					
Panel thickness	Drilling depth	Drilling for dowel	Item number	Black painting plate	Nickel plated	Zinc	Corrosil zinc
12	9.2 min	5.25	05574 →	838	847	885	897
12	10 min	6	05576 →			885	
16	12.5	8	05579 →			885	
Other finishes on request							
i Not suitable for Quickfit dowels							





1000 Pcs
2000 Pcs (05576)

Made of zinc

Cabinet Connectors

- # Cabinet Connectors



Cabinet Connectors

Cabinet Connectors



Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors



Cabinet Connectors

Cabinet Connectors

Cabinet Connectors



Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors

Cabinet Connectors



Cabinet Connectors

Cabinet Connectors

System 6

Quickfit-Expando

Connectors

System Features

A face boring connector family for 32mm system drilling with full range of panel and application variants for all cabinet manufacturing applications.

- Minimum drilling requirements
- Linear cam design for constant tightening loads when driving
- Angledriv feature on cam for maximum driving comfort
- Interchangeable pins for wood, plastic and steel applications
- Pins with twinstart drive for fast insertion
- Interchangeable Quickfit pin fastenings available
- Tool-less fastening capable versions
- Back-to-back fastenings for common vertical panel fixing of shelves

System 6 consists of a range of 20mm diameter housing, Quickfit™ and conventional dowels, end dowels and double ended dowels.

Housings are made from high grade plastic or zinc, with zinc cams.

Wedgefix-6 connector is a special fastener without cam, simply to snap onto a pre-inserted dowel.


Applications

Titus System 6 is ideal for use in high volume production of case goods, closet and garage storage systems. Because no


edge boring is required, it is an excellent choice for manufacturing environments with limited drilling capacity.

Side-entry Drop-on

Side-entry insertion of shelf panel: from the side or from the top

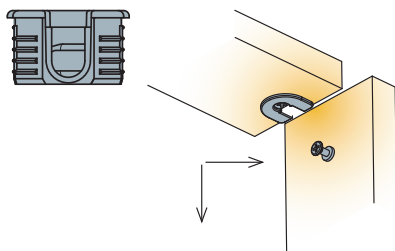


Drop-on insertion of shelf panel: only from the top
Using drop-on connections allows for one-man installation

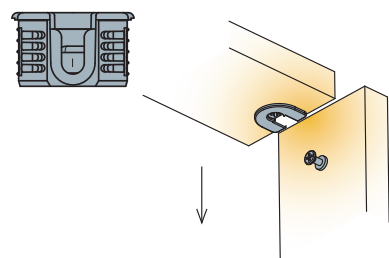


Outrigger/ Non outrigger

Outrigger


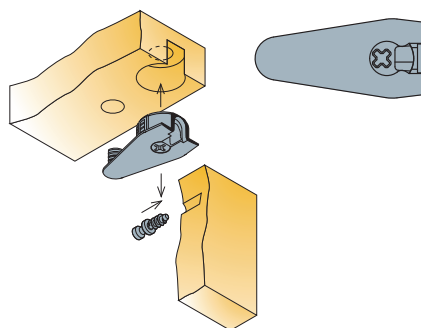


Non outrigger




Expando function

Expanding housings and dowels provide a tight joint.




Assembly


1. Press the housing into face board




2. Press the dowel into side panel



3. Assemble the panels

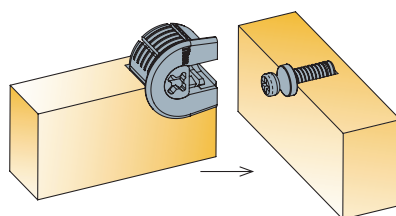

4. Tighten the joint



System 6



Quickfit-Expando

Expanding Dowels

i

Not suitable for System 6.2

- Available in Ø5mm, Ø8mm for panel-to-panel, and back-to-back applications
- For applications with all Titus Ø20 and Sys 6 housings
- 'Klix' locking feature provides a strong, vibration proof connection
- Depth stop collar for accurate insertion

		D2		
Technical and mounting details		Drilling diameter for dowel thread	Item number	Dark grey
Dowel		5	06408 →	880
		8	06410 →	880
 D2= Ø5mm				
 D2= Ø8mm				
 5000 Pcs				
Made of zinc, plastic				
Dowel Ø5 x 7.5 back-to-back applications		5	06479 →	880
				
 Ø5 x 7.5				
 5000 Pcs				
Made of zinc, plastic				

System 6

Quickfit-Expando

Dowels

- Available in various Ø3mm and/or Ø5mm thread forms for screw-in, knock-in and/or 'spiked' hole applications
- For applications with all Titus Ø20mm and Sys 6 housings
- 'Klix' locking feature provides a strong, vibration proof connection
- Dowels feature an integral skirt which acts as a positive stop during insertion

Technical and mounting details		C	Drilling depth for dowel thread	Item number	Zamak	Zinc plated
Dowel Ø5			9	06401 →	885	
			8	06402 →	885	883
			11.5	06406 →	885	883
Dowel Ø5 x 11 knock-in				06403 →	885	
Dowel M4 x 7				06405 →		883
Dowel Ø3 x 11.5				06495 →		883

 Inserts
 Made of plastic


→ see page 1.70



System 6

Quickfit-Expando

Double-ended Dowels

- For 16mm, 18mm and 19mm board
- For applications with all Titus Ø20mm and Sys 6 housings
- 'Klix' locking feature provides a strong, vibration proof connection

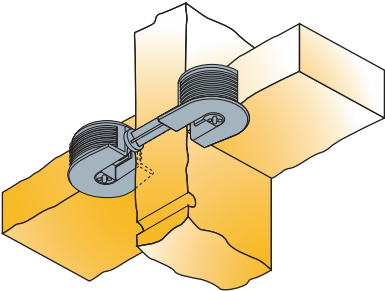 Technical and mounting details	B Panel thickness	Item number	Zinc	Double-ended dowel 

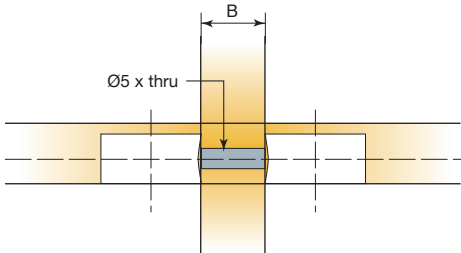

 2500 Pcs





Made of zinc

System 6

Quickfit-Expando

End Dowels

- For 16mm, 18mm and 19mm board
- For applications with all Titus Ø20mm and Sys 6 housings
- 'Klix' locking feature provides a strong, vibration proof connection

 Technical and mounting details		B	 Zinc
 End dowel		Panel thickness	
 		16	06412 → 885
		18	06411 → 885
		19	06415 → 885



2000 Pcs
1000 Pcs (06411)

Made of zinc






System 6

Quickfit-Expando

20mm Expanding Housing

Non-outrigger

- Available in 15mm/16mm and 18mm/19mm versions for drop-on and/or side-entry applications
- Available in all-metal or plastic/metal options
- 'Klix' locking feature provides a strong vibration proof connection
- Compatible with all Sys 6 screw-in and Quickfit dowels

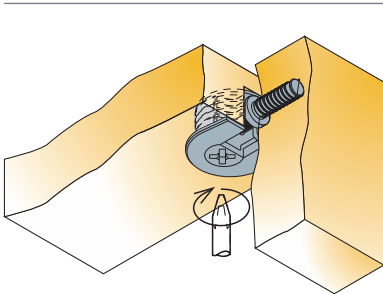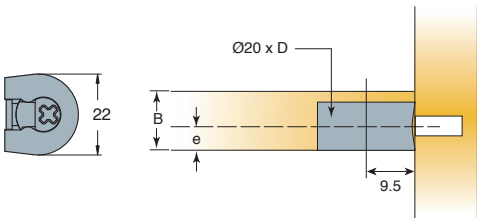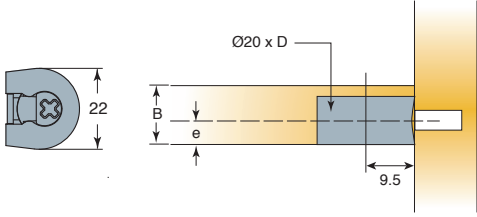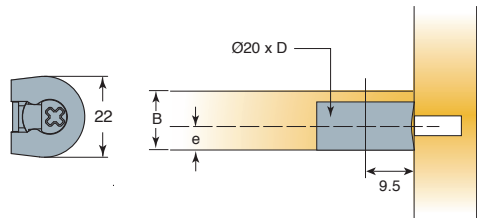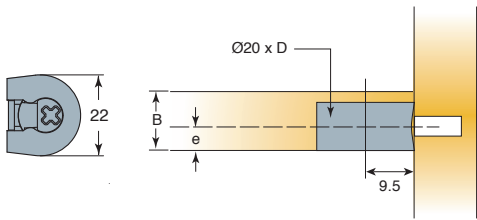 Technical and mounting details							
e	B	D	Item number	Dark brown plastic	Nickel plated	Silver plastic	White plastic
Panel thickness	Drilling depth						
7.75	15/16	12.5	06451 →		847		
9.25	18/19	14	06453 →		847		
  500 Pcs Made of zinc							
  2500 Pcs Made of plastic							
  500 Pcs Made of zinc							
  2500 Pcs Made of plastic							
7.75	15/16	12.5	06435 →	831		861	877
9.25	18/19	14	06437 →	831		861	877
Other colours on request							
7.75	15/16	12.5	06447 →		847		
9.25	18/19	14	06449 →		847		
7.75	15/16	12.5	06431 →	831		861	877
9.25	18/19	14	06433 →	831		861	877
Other colours on request							





System 6

Quickfit-Expando

20mm Expanding Housing

Outrigger

- Available in 15mm/16mm and 18mm/19mm versions for drop-on and/or side-entry applications
- Available in all-metal or plastic/metal options
- 'Klix' locking feature provides a strong vibration proof connection
- Compatible with all Sys 6 screw-in and Quickfit dowels


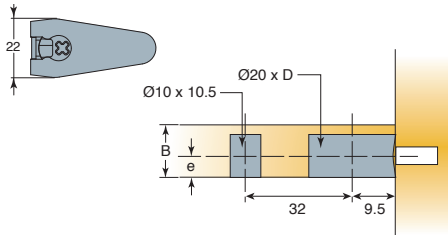
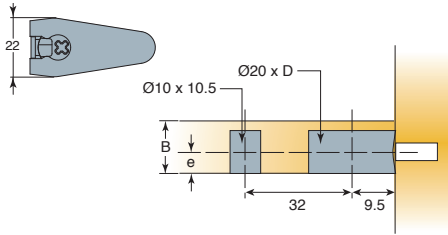
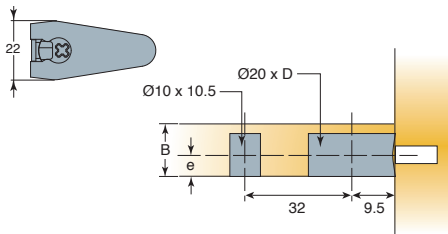
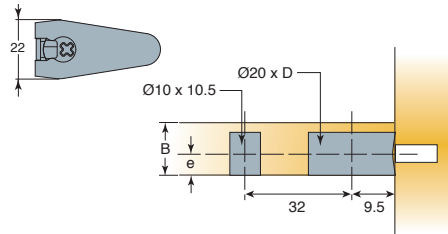
Technical and mounting details		e	B	D	Item number				
			Panel thickness	Drilling depth		Dark brown plastic	Black plastic	Nickel plated	White plastic
Side-entry		7.75	15/16	12.5	06459 →			847	
		9.25	18/19	14	06461 →			847	
Side-entry		7.75	15/16	12.5	06443 →				877
		9.25	18/19	14	06445 →	831	835		877
		9.25	18/19	14	*06395 →		835		877
Other colours on request *American market only									
Drop-on		7.75	15/16	12.5	06455 →			847	
		9.25	18/19	14	06457 →			847	
Drop-on		7.75	15/16	12.5	06439 →		835		877
		9.25	18/19	14	06441 →	831	835		877
		9.25	18/19	14	*06397 →		835		877
Other colours on request *American market only									

System 6

Quickfit-Expando

Expanding Wedgefix Housing (no Inner Cam)






- Available in 12mm, 15mm/16mm and/or 18mm/19mm versions for Sys 6 screw-in and Quickfit dowel applications
- Available in a variety of plastic colours
- Wedgefix housing allows easy customer hand-assembly or factory automated insertion
- When used with Sys 6 Quickfit dowels this provides a true tool-less fastening system

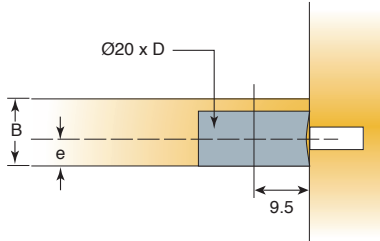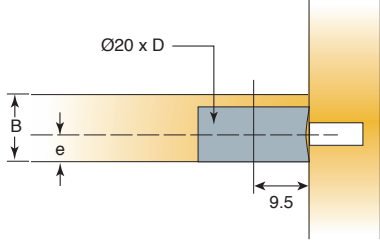		Technical and mounting details		e	B	D					
					Panel thickness	Drilling depth	Item number	White	Black	Dark brown	Silver
For use with screw-in dowels   		6	12	10	06470 →	877			861		
		7.75	15/16	12.5	06473 →	877	835	831	861		
		9.25	18/19	14	06465 →	877	835	831	861		
		11	22	16	06464 →				861		
		Other colours on request									
 2500 Pcs		Made of plastic									
For use with Quickfit dowels   		7.75	15/16	12.5	06471 →	877	835	831	861		
		9.25	18/19	14	06472 →	877	835	831	861		
		Other colours on request									
 2500 Pcs		Made of plastic									

System 6

20mm Knock-in Housing Non-outrigger

- Available in 15mm/16mm and 18mm/19mm versions for drop-on and/or side-entry applications
- Available in plastic-metal options
- 'Klix' locking feature provides a strong vibration proof connection
- Compatible with all Sys 6 screw-in and Quickfit dowels

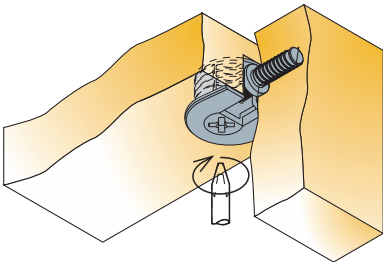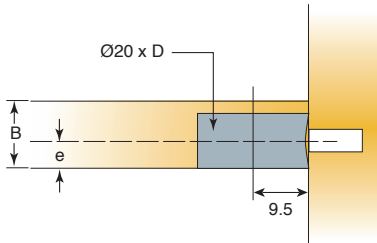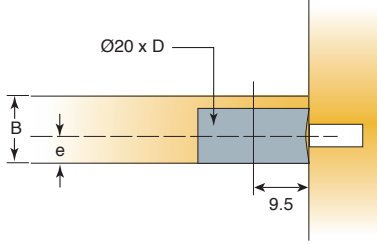		Technical and mounting details							
Side-entry				e	B	D			
				Panel thickness	Drilling depth	Item number		Silver plastic	White plastic
				7.75	15/16	12.5	06381 →	861	877
				9.25	18/19	14	06385 →	861	877
Product available on American and Asian market only									
Other colours on request									
 2500 Pcs		Made of plastic							
Drop-on				e	B	D			
				Panel thickness	Drilling depth	Item number		Silver plastic	White plastic
				7.75	15/16	12.5	06383 →	861	877
				9.25	18/19	14	06387 →	861	877
Product available on American and Asian market only									
Other colours on request									
 2500 Pcs		Made of plastic							

 Cover cap 06936
 Made of steel

System 6








Flush 20mm Knock-in Housing

Non-outrigger

i

For use with dedicated drill bit only.
 See below.

- A face-boring connector with the flush housing permits easy flat-pack transportation without panel damage
- Available for 19mm board thickness for drop-on and/or side-entry applications
- 'Klix' locking feature provides a strong vibration proof connection
- Compatible with all Sys6 screw-in and Quickfit dowels

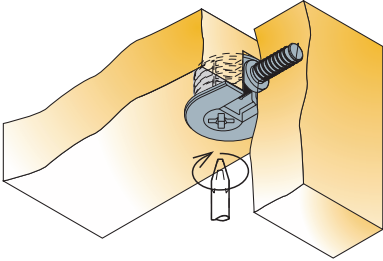Technical and mounting details		e	B	D	Item number	White plastic
Side-entry      1000 Pcs Housing made of plastic, cam made of zinc		9.5	19	14.2	*06343 →	877
		*American market only				
Drop-on     1000 Pcs Housing made of plastic, cam made of zinc		9.5	19	14.2	*06348 →	877
		*American market only				
Drill bit for Flush 20mm Knock-in housing   right handed left handed   1 Pcs Made of carbon steel					00435	
					00436	
		*American market only				

System 6.2

Quickfit-Expando

Connectors

System Features

A face boring connector family for 32mm system drilling with full range of panel and application variants for all cabinet manufacturing applications.

- Minimum drilling requirements
- Anti-rotation ribs prevent rotation during tightening for reliable product performance
- Angledriv feature on cam for maximum driving comfort
- Interchangeable pins for wood, plastic and steel applications
- Pins with twinstart drive for fast insertion
- Interchangeable Quickfit pin fastenings available
- Tool-less fastening capable versions
- Back-to-back fastenings for common vertical panel fixing of shelves

System 6.2 consists of a range of 20mm diameter housing, Quickfit™ and conventional dowels, end dowels and double ended dowels.

Housings are made from high grade plastic with zinc cams.

Wedgex connector is a shelf fastener without cam, simply to snap onto a pre-inserted dowel.


Applications

Titus System 6.2 is ideal for use in high volume modular cabinet production: closets, wardrobes, garage storage systems, and shelving units.


Because no edge boring is required, it is an excellent choice for manufacturing environments with limited drilling capacity.

Side-entry Drop-on

Side-entry insertion of shelf panel: from the side or from the top

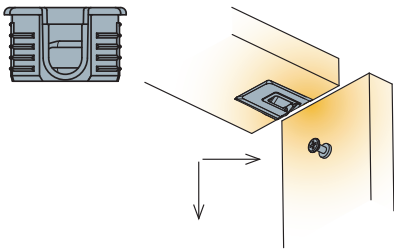


Drop-on insertion of shelf panel: only from the top
Using drop-on connections allows for one-man installation

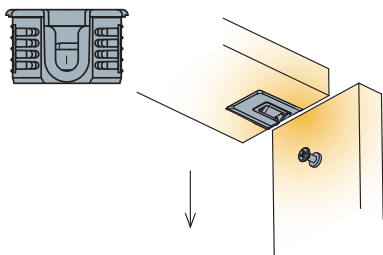

Efficient square design


Square shape guides the eye to easy insertion parallel to the board panel and allows a larger surface of the product

to rest on the panel when tightened for optimal positioning and ease at tightening.




Ribs on housing prevent rotation in panel

The anti-rotation ribs on the housing prevent cam rotation and the resultant panel shift.




Comfortable tightening with Angledriv

The Angledriv feature on the cam guides the screwdriver to a 27° angle for comfortable access. The locking action creates a tight, secure fit.

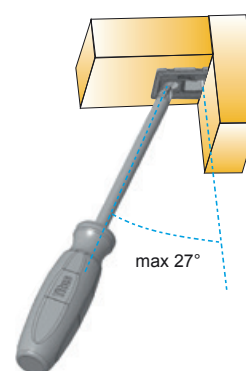

Easy and quick assembly with Quickfit dowel

Improved 'at-home' assembly experience.







System 6.2

Quickfit Dowels

i

Suitable for System 6.2 only





- Tool-free insertion
- Depth stop collar assures accurate insertion
- Available in Ø5mm and Ø8mm
- For applications with all Titus Sys 6.2 Ø20mm housings

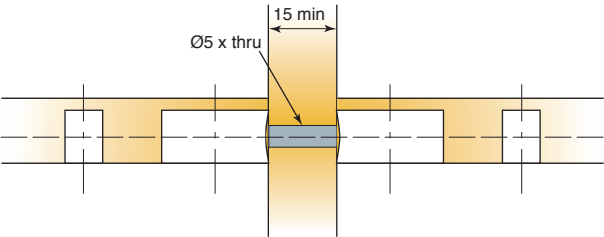 Technical and mounting details		Item number	Dark grey
Quickfit dowel Ø5mm    5000 Pcs Made of zinc, plastic		06576 →	880
Quickfit dowel Ø5mm for back-to-back application    5000 Pcs Made of zinc, plastic		06627 →	880
Quickfit dowel Ø8mm    5000 Pcs Made of zinc, plastic		06629 →	880

System 6.2

Screw-in Dowels

- Available in Ø3mm and Ø5mm thread forms for screw-in, knock-in and 'spiked' hole applications
- For applications with all Titus Sys 6.2 Ø20mm housings
- Dowels feature an integral skirt which acts as a positive stop during insertion

Technical and mounting details			C			
			Drilling depth for dowel thread	Item number	Zinc plated	Zamak
Dowel Ø5   	2000 Pcs	Made of zinc or steel	9	06401 →		885
			8	06402 →	883	885
			11.5	06406 →	883	885
Dowel Ø5 x 11 knock-in   	2000 Pcs	Made of zinc		06403 →		885
Dowel M4 x 7   	4500 Pcs	Made of steel		06405 →	883	
Dowel Ø3 x 11.5   	12500 Pcs	Made of steel		06495 →	883	






Inserts
Made of plastic

→ see page 1.70

System 6.2

Double-ended Dowels

- For 16mm, 18mm and 19mm board
- For applications with all Titus Sys 6.2 Ø20mm housings
- 'Klix' locking feature provides a strong, vibration proof connection

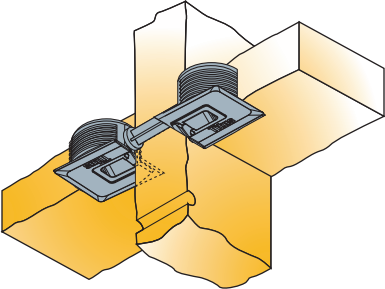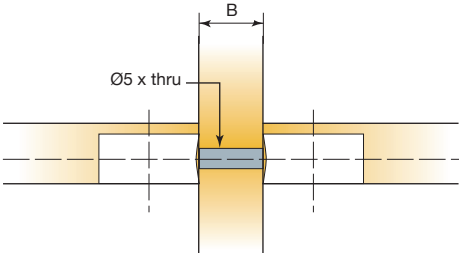 Technical and mounting details	B Panel thickness	Item number	Zinc	Double-ended dowel   




 2500 Pcs

Made of zinc

System 6.2

End Dowels

- For 16mm, 18mm and 19mm board
- For applications with all Titus Sys 6.2 Ø20mm housings
- ‘Klix’ locking feature provides a strong, vibration proof connection

		B		
		Panel thickness	Item number	Zinc
 Technical and mounting details	End dowel   	16	06412 →	885
		18	06411 →	885
		19	06415 →	885






2000 Pcs
 1000 Pcs (06411)

Made of zinc

System 6.2

20mm Knock-in Housing

- Available in 15mm/16mm and 18mm/19mm versions for drop-on and side-entry applications
- Metal cover cap option
- ‘Klix’ locking feature provides a strong vibration proof connection
- Compatible with all Sys 6.2 screw-in dowels and Quickfit dowels



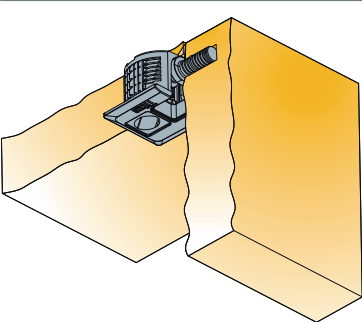
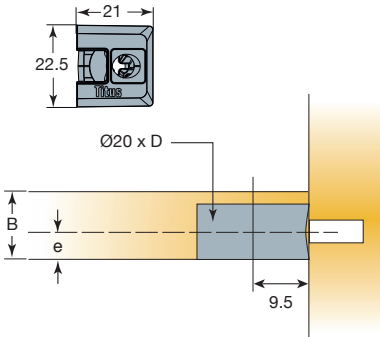
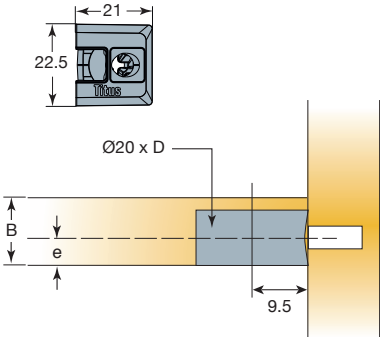
 Technical and mounting details		e	B	D	Item number				
			Panel thickness	Drilling depth		Silver grey	Dark grey	Dark brown	White
Side-entry  	2500 Pcs Made of plastic	7.75	15/16	12.5	06973 →	381	383	831	877
		9.25	18/19	14	06977 →	381	383	831	877
		Other colours on request							
Drop-on  	2500 Pcs Made of plastic	7.75	15/16	12.5	06975 →	381	383	831	877
		9.25	18/19	14	06979 →	381	383	831	877
		Other colours on request							

System 6.2

Wedgefix Housing


(no Inner Cam)

- Available in 15mm/16mm and 18mm/19mm versions
- Compatible with all Sys 6.2 screw-in dowels and Quickfit dowels
- Wedgefix housing allows easy customer hand assembly or factory automated insertion
- When used with Sys 6.2 Quickfit dowels this provides a true toolless fastening system

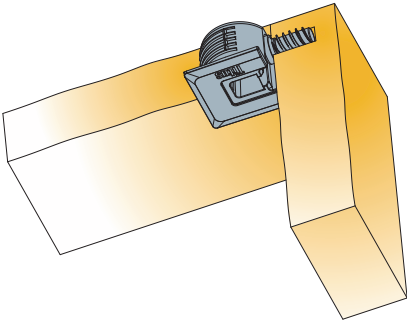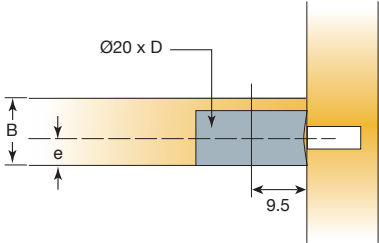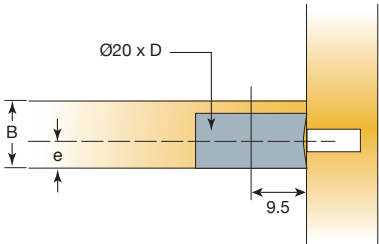 Technical and mounting details		e	B	D				
			Panel thickness	Drilling depth	Item number	Silver grey	Dark grey	Dark brown
For use with screw-in dowels   		7.75	15/16	12.5	06619 →	381	383	831
		9.25	18/19	14	06620 →	381	383	831
		Other colours on request						
 2500 Pcs		Made of plastic						
For use with Quickfit dowels   		7.75	15/16	12.5	06621 →	381	383	831
		9.25	18/19	14	06622 →	381	383	831
		Other colours on request						
 2500 Pcs		Made of plastic						


Add-on Cover Caps

- Metal cover caps for retrofit mounting
- Enhanced look and contemporary design
- Fits all Sys 6.2 plastic housings

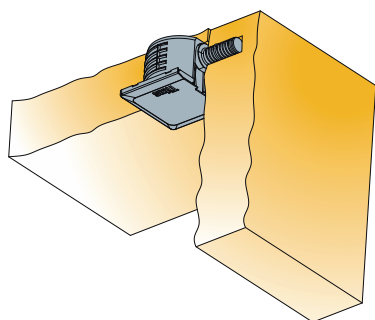

Technical and mounting details

Cover cap for
20mm housing



Item number

Nickel plated

Noir

06596 →

054

068



2050 Pcs

Made of steel

System 7

Heavy Duty Connectors

System Features


A family of heavy duty cams and dowels for offices and public furniture.

- Heavy-duty cam and dowel connector with excellent pull-out and racking strength
- Designed for applications requiring high strength and high performance

- Simple and fast installation
- Suitable for materials such as pine, MDF, and chipboard
- Uses common components with standard drilling patterns
- Suitable for medium to high-value furniture as well as cost-efficient furniture

Applications

- Suitable for factory insertion and home assembly
- Heavy-duty cabinets, desks, bookcases and large wardrobes, computer furniture, modular panel systems, in-store and retail fixtures, contract office furniture, and platform-style furniture.



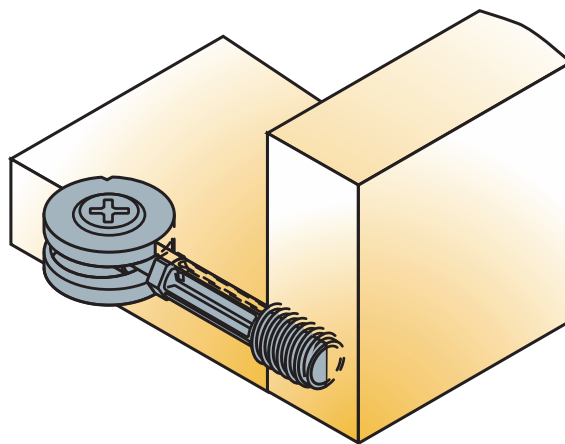


System 7

Heavy Duty Ø20mm

Cam and Dowel

- Dowel available with Ø10mm eurothread and cam available in Ø20mm for a variety of panel thicknesses
- 'Klix' locking feature provides strong, vibration proof joint
- High strength product that eliminates the need for time consuming metal inserts


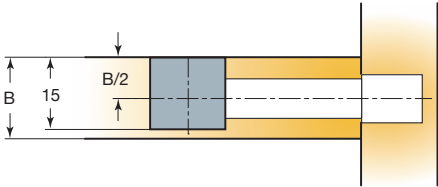
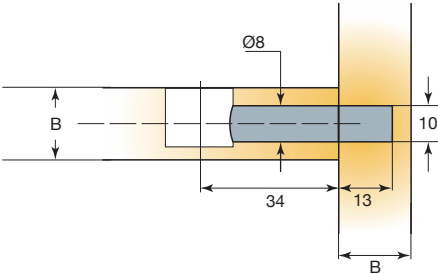
Technical and mounting details		B	Panel thickness	Item number	Zinc
					
Cam Ø20			18	05409 →	885
 					
 500 Pcs		Made of zinc			
Dowel Ø7 Ø10 mm thread		min 18	05410 →	885	
 					
 500 Pcs		Made of zinc			

System 7

High Strength Connectors

Contract Fix™ System







- High performance fastener
- Thread design gives repeatability
- Multi-drive recess
- Higher than average pull-up

				
Technical and mounting details		Item number	Zinc plated	Zinc
M6 Dowel 7x34		05971 →	883	
 				
 1000 Pcs		Made of steel		
Housing cylinder 15x12		05960 →		885
 				
 1000 Pcs		Made of zinc		
Grub screw		05917 →		885
				
 2500 Pcs		Made of zinc		
 Inserts Made of zinc		→ see page 1.70		

Accessories for Connectors

Inserts


- Available in both zinc and plastic for use in various applications
- For use with various threaded dowels
- For use with various panel thicknesses
- Knock-in and screw-in versions available

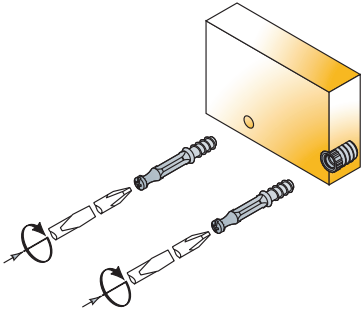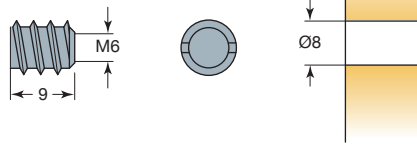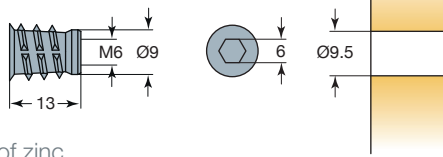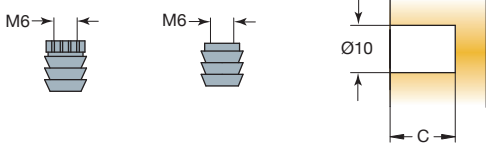 Technical and mounting details				C	Drilling length for insert	Item number	Natural white	Raw
Ø8 x 9    500 Pcs Made of zinc						408-3166 →		600
Ø9 x 13    1000 Pcs Made of zinc						408-3391 →		600
Ø9.5 x 18    1000 Pcs Made of zinc						408-3423 →		600
Ø12 x 15    1000 Pcs Made of zinc						408-3424 →		600
Ø10 x 13/M6 nut    20000 Pcs (275-4035)  30000 Pcs (275-4058) Made of plastic				13	275-4035 →		200	
				11	275-4058 →		200	

Cabinet Accessories





Shelf Q-Peg

- Easy and quick installation
- Structural cabinet stability through shelf-to-panel connection
- Minimalistic appearance
- In line with the shelf surface

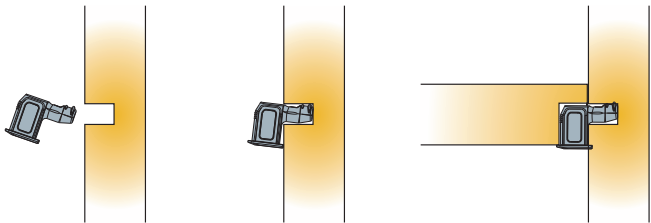


Technical and mounting details

Shelf Q-Peg Square

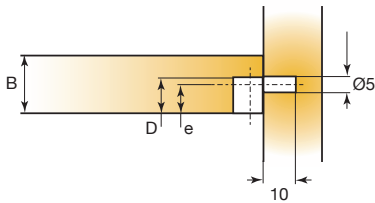

Capacity chart

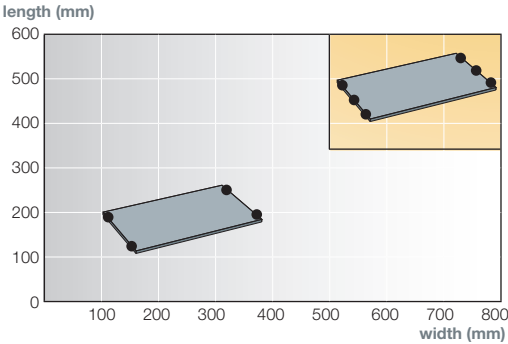

Recommended number of mounted pieces, 4 or 6 per shelf, is determined by its size in accordance with the EN 14749:2016






B	D	e	H	Item number	Nickel plated	Noir
Panel thickness	Drilling depth	Edge to pin hole center	Height			
18	11.5	9	11	01924 →	847	668
16	10.3	7.75	9.75	01927 →	847	668

1000 Pcs

Made of zamak


Shelf Supports









- Hold down feature traps the shelf in place for security
- Folding design allows the shelf to be post mounted in an assembled cabinet
- To suit a wide range of shelf thicknesses
- Pad for metal shelf support when using glass

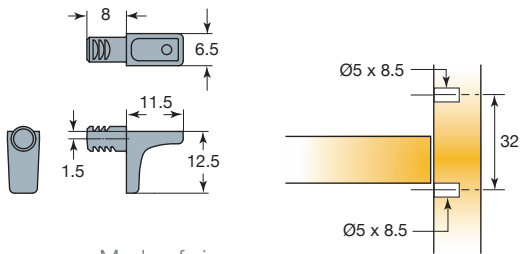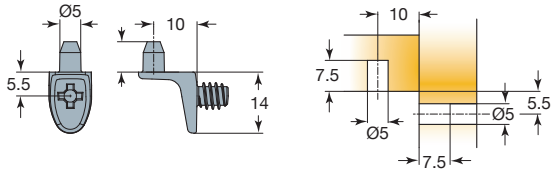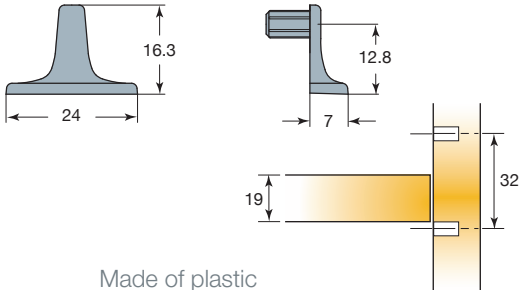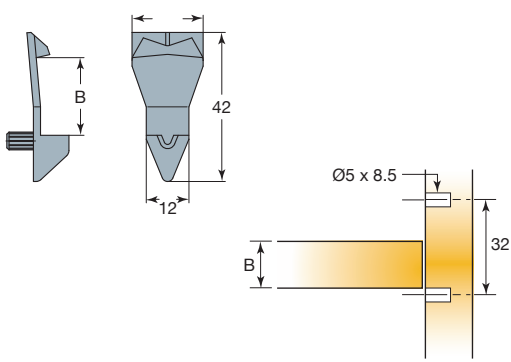		B					
Technical and mounting details		Item number	Clear	Nickel	Zinc	White	Silver
	Shelf support (push-in)  2000 Pcs Made of zinc	01825 →		847	885		
	Shelf support (push-in)  2000 Pcs Made of zinc	01852 →		847			
	Shelf holddown (for use with 01825)  12000 Pcs Made of plastic	01822 →					861
	Shelf support retainer  4000 Pcs 5000 Pcs (01837) Made of plastic	15 01837 →				877	
		16 01838 →	830				
		16 *01828 →				877	
		18 01823 →	830			877	861
		19 01829 →				877	
		19 01843 →	830				
		* American market only Other colours on request					







Shelf Supports

Mounting procedure:

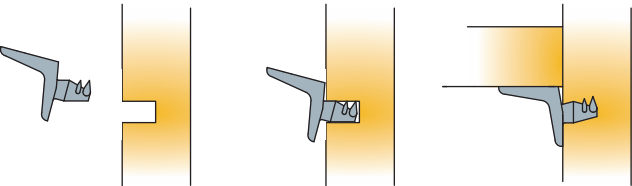


Technical and mounting details			Item number	Nickel plated
Pin Ø5x10 (screw-on)     1000 Pcs Made of zinc			338-3687 →	650
For glass shelves (rock-in)     1000 Pcs Made of zinc and plastic			338-9721 →	860
Pin Ø5x10 (rock-in)     1000 Pcs Made of zinc			338-3686 →	650
Shelf support Ø3mm with pin     2000 Pcs Made of zinc			01912 →	847

Shelf Supports

Technical and mounting details			Item number	Nickel plated
Shelf support with pin   	 2000 Pcs	Made of steel	01910 →	847
Shelf support   	 2000 Pcs	Made of steel	01911 →	847
Shelf support with pin   	 2000 Pcs	Made of steel	01916 →	847

Joining Plates



- Rigid and strong
- No pre-drilling
- Spacer pegs provide an even 2mm gap
- Sleek design



Technical details


Item number

Nickel plated

Joining plate 105mm

360-1222 →

054

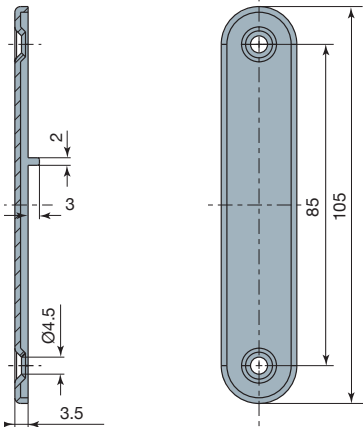


500 Pcs

Made of steel

Joining plate 43mm

360-1230 →

054

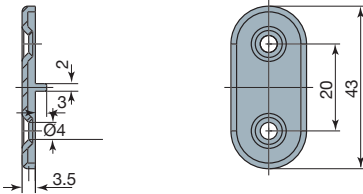


1000 Pcs

Made of steel

Fixing screw





Chipboard screws
820-6328-050

10000 Pcs






Backfix Connectors

- Push-in design
- No tools required for Backfix insertion
- The handle acts as a stop during locking, providing greater accuracy and speed of insertion
- Barbs provide a quality fastener for rigid cabinet construction

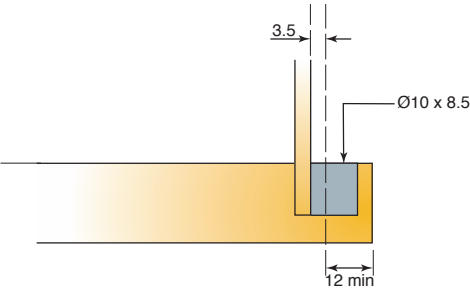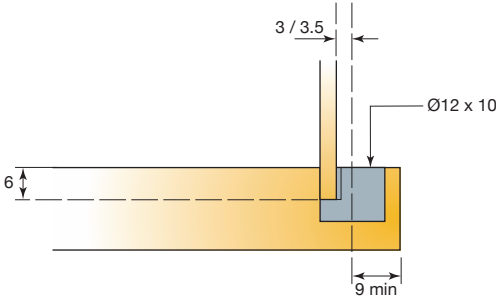
Technical and mounting details		Item number	Zinc	Corrosil
Backfix 2.0      1000 Pcs Made of zinc		02254 →	885	
Hardboard Backfix-no tools    1000 Pcs Made of zinc		02154 →	885	897

Back Wall Connectors

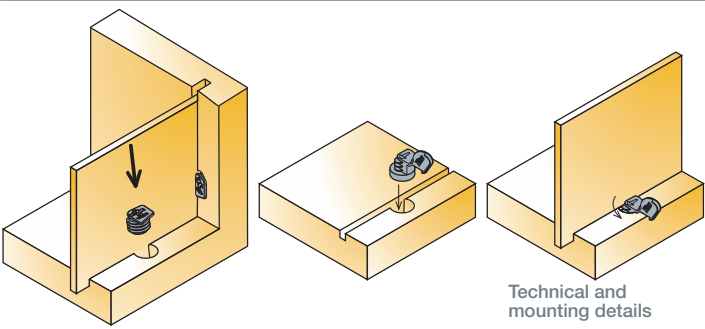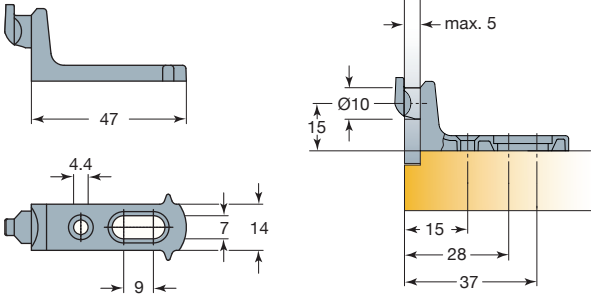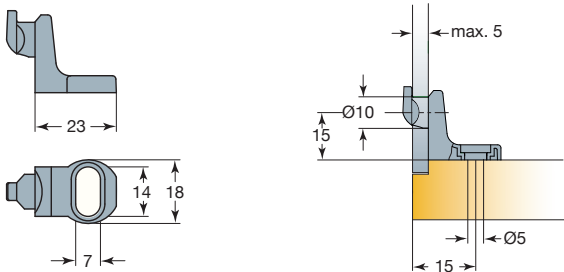 Technical and mounting details		Item number	Nickel plated
Rear wall connector long  		353-3649 →	650
 500 Pcs Made of zinc			
Rear wall connector short  		353-3650 →	650
 500 Pcs Made of zinc			



Panel Brackets

- To be used to fix face frames to carcasses without additional drilling to cabinet
- Designed for carcase side panel of 18mm thickness
- Edge to hole centre = 28mm
- Easier fixing of frames due to parts that remain in holes once inserted



Technical and mounting details

90° Bracket
(screw-in/rock-in peg)



 1000 Pcs

Made of zinc

Item number

02111 →



Nickel plated

847

Zinc

885

90° Bracket
(screw-in)



 1000 Pcs



Made of zinc

02110 →

847

885

Corner bracket
(rock-in)



 1000 Pcs


Made of zinc





02133 →

885






Adjustable Cabinet Legs

Leg Top Fixes



		Technical and mounting details		Item number	Black
Rivet fix		Regular	02560 →		
		Heavy duty	*02630 →	835	
		* American market only			
					
 200 Pcs	Made of plastic				
Socket fix (knock in)				02558 →	835
					
 200 Pcs	Made of plastic				
Socket fix (screw on)				02559 →	835
					
 200 Pcs	Made of plastic				





- Lip provides additional support to end panel and gives extra strength
- The side fix has twin dowel mounting for positive location
- Rivet fix design gives quick fastening of socket
- Choice of dowel or screw on sockets
- Invert second clip for corner plinth fixing

Technical and mounting details		A Drilling diameter	D Drilling depth	B1 Drilling distance	Item number	Black
Leg top    100 Pcs Made of plastic	(4 screws) screw on	3	6	64 x 64	02575 →	835
	(4 dowels + lip) dowel/lip	10	12.5	64 x 64	02582 →	835
	(4 screws + lip) screw/lip	3	6	64 x 64	02579 →	835
	2 dowels/2 screws	10/3	12.5/6	64 x 64	*02669 →	835
	Screw on	3	6	64 x 64	*02671 →	835
	Dowels	10	12.5	64 x 64	*02672 →	835
	* Asian market only When using leg top, you must use foot with 01373 clip → see page 3. 8					
Rivet fix/skid   200 Pcs Made of plastic					02663 →	835
Rivet fix/ no rivet   200 Pcs Made of plastic					*02642 →	835
* Asian market only						

Adjustable Cabinet Leg Range

Adjustable Leg,
Extension and Foot





- Legs are supplied assembled at a pre-set height
- Wide adjustment range to fit all common plinth heights
- Jacking point adjustment feature
- Simple push on design to sockets

 Technical and mounting details		B1	H	Item number	Black
		Drilling distance	Fitting height adjustment		
Adjustable leg	 				
		24	60-90	02570 →	835
		24	92-152	02549 →	835
		24	92.5-150	*02666 →	835
		24	92-150	*02648 →	835
		24	125-185	*02653 →	835
	Big foot	38	92-150	*02699 →	835
	Big foot	38	125-185	*02706 →	835
* Asian market only					
 100 Pcs (02570) 200 Pcs Made of plastic					
Leg extension				02571 →	835
 					
 200 Pcs Made of plastic					
Fixed foot				02569 →	835
 				*02574 →	835
 200 Pcs Made of plastic		* American market only			

Adjustable Cabinet Leg Range

Plinth Clips and Fox Clip





- Spring design eliminates the need for drilling and fits into any position on plinth
- The screw in version can sit in variable plinth positions
- When taking plinth around the corner, the fitting is reversible

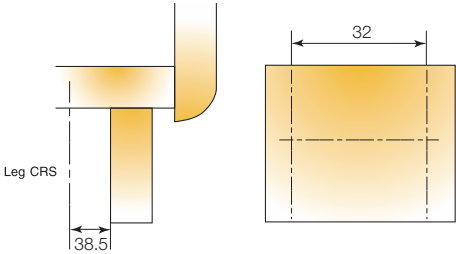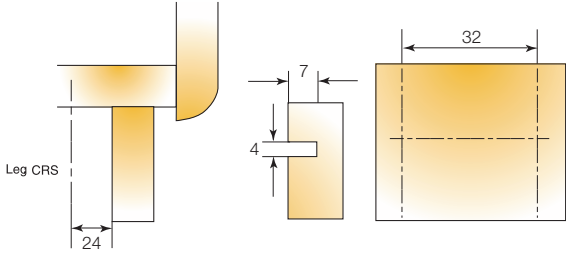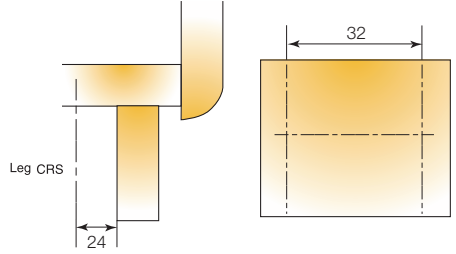Technical and mounting details		 Natural		 Black	
		Item number			
Fox clip    1000 Pcs Made of plastic		01373 →	846		
Plinth clip 38 screw    500 Pcs Made of plastic		02578 →		835	
		*02710 →		835	
* Asian market only					
Plinth clip 24 knock on    600 Pcs Made of plastic		02523 →		835	
Plinth clip 24 screw on    600 Pcs Made of plastic		02634 →		835	

Drawer Solutions

Drawer Front Adjuster (DFA)

- Multi-direction adjustment
- Locking screw to fasten
- Independent of drawer system
- One piece housing

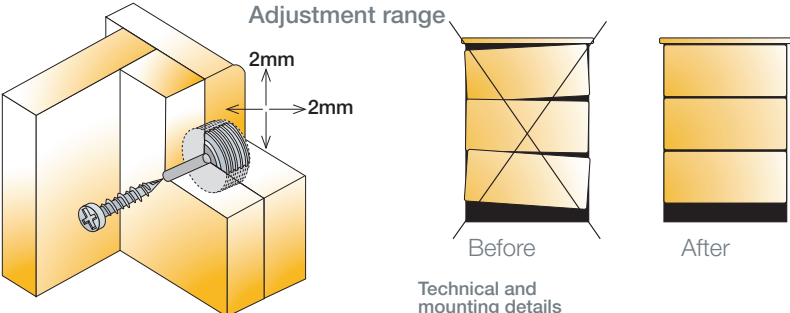 Adjustment range 2mm 2mm Before After Technical and mounting details						
DFA housing		Item number	Dark brown	Black	Nickel	White
		06308 →	831			877
						
 2500 Pcs		Made of plastic				
DFA housing		*06310 →	831			877
		*06309 →	831			877
		*00033 →			847	
		*American market only *06309 does not include screw				
 2500 Pcs		Made of zinc, plastic				

Concealed Hinges

Concealed Hinges

A Comprehensive Range

T-type hinge



Quick furniture assembly and consistent performance on wide range of doors

- 3Way snap-on mounting
- Highly tolerant
- Press-to tool-free hinge cup fixing
- Touch opening for handleless furniture


S-type hinge



Simple snap-on mounting system

- Easy assembly and disassembly
- ConfidentClose
- Touch opening for handleless furniture
- Rigid attachment

B-type hinge

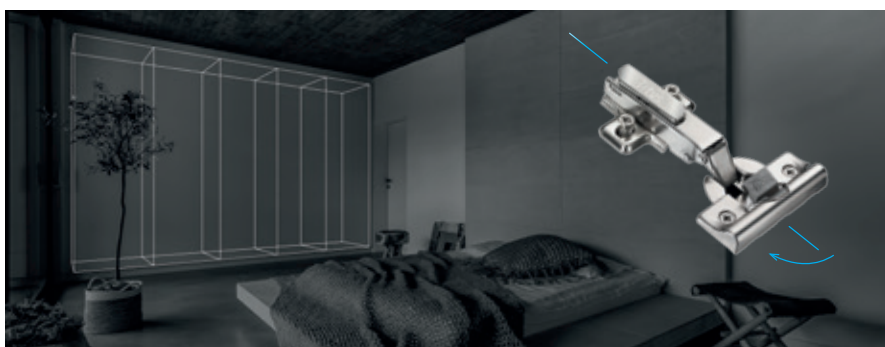

Reliable slide-on mounting system

- ConfidentClose
- Reliable door closing
- Simplicity and versatility

Opening angle	Door thickness	Cranking	Door tab K	Mounting mode	Mounting plate type	Mounting plate height	Soft closing options	Page
95° 110° 120° 170°	15-34mm 15-26mm	0mm 5mm 9mm 17mm angled	3-9mm 3-6mm	'3Way' snap-on	cruciform linear for face frame	0mm 1mm 2mm 3mm 4mm 9mm	Damping integrated in the hinge cup Glissando add-on or stand-alone damping solutions	2.25
110° 170°	16-24mm	0mm 9mm 15mm angled	3-5mm 3-12mm	snap-on	cruciform for face frame	0mm 1mm 2mm 3mm 6mm 9mm 18mm	Damping integrated in the hinge cup Glissando add-on or stand-alone damping solutions	2.85
110° 170°	16-24mm	0mm 9mm 15mm angled	3-5mm 3-12mm	slide-on	cruciform	0mm 1mm 2mm 3mm 4mm 5mm 6mm 9mm 18mm	Damping integrated in the hinge cup Glissando add-on or stand-alone damping solutions	2.129

Concealed Hinges

Product Guide

	Cranking	Opening angle	Cup type	Page
T-type				
T-type-i 110	0mm	110°	for wood doors	2.27
	5mm	110°	for wood doors	2.27
	9mm	110°	for wood doors	2.29
	17mm	110°	for wood doors	2.29
T-type-i 110/15°	15°, 9mm	110°	for wood doors	2.31
T-type-i 110/30°	30°, 9mm	110°	for wood doors	2.33
T-type-i 110/45°	45°, 9mm	110°	for wood doors	2.35
	45°, 17mm	110°	for wood doors	2.35
	45° , 23 mm	110°	for wood doors	2.37
T-type-i 110/90° for blind corner	90°, 17mm	110°	for wood doors	2.39
T-type-i 120	0mm	120°	for wood doors	2.41
T-type-i 95	0mm	95°	for wood doors	2.43
	5mm	95°	for wood doors	2.43
	9mm	95°	for wood doors	2.45
	17mm	95°	for wood doors	2.45
T-type-i 170	0mm	170°	for wood doors	2.47
	5mm	170°	for wood doors	2.49
	9mm	170°	for wood doors	2.49
T-type 110	0mm	110°	for wood doors	2.51
	5mm	110°	for wood doors	2.51
	9mm	110°	for wood doors	2.53
	17mm	110°	for wood doors	2.53
T-type 110/15°	15°, 9mm	110°	for wood doors	2.55
T-type 110/30°	30°, 9mm	110°	for wood doors	2.57
T-type 110/45°	45°, 9mm	110°	for wood doors	2.59
	45°, 17mm	110°	for wood doors	2.59

	Cranking	Opening angle	Cup type	Page
T-type				
T-type 110/90° for blind corner	90 °, 17mm	110°	for wood doors	2.61
T-type 120	0mm	120°	for wood doors	2.63
T-type 95 thick door hinge	0mm	95°	for wood doors	2.65
	5mm	95°	for wood doors	2.65
	9mm	95°	for wood doors	2.67
	17mm	95°	for wood doors	2.67
T-type 110 unsprung hinge	0mm	110°	for wood doors	2.69
	5mm	110°	for wood doors	2.69
	9mm	110°	for wood doors	2.71
T-type 170	0mm	170°	for wood doors	2.73
	5mm	170°	for wood doors	2.75
	9mm	170°	for wood doors	2.75
T-type for pie-cut corner cabinet			for wood doors	2.77
T-type mounting plates				2.79
T-type mounting plates for face frame cabinets				2.83

	Cranking	Opening angle	Cup type	Page
S-type				
S-type-i3 110	0mm	110°	for wood doors	2.87
	9mm	110°	for wood doors	2.87
	15mm	110°	for wood doors	2.87
S-type-i3 110/15°	15°, 9mm	110°	for wood doors	2.89
S-type-i3 110/24°	24°, 9mm	110°	for wood doors	2.91
S-type-i3 110/30°	30°, 9mm	110°	for wood doors	2.93
S-type-i3 110/45°	45°, 9mm	110°	for wood doors	2.95
	45°, 18mm	110°	for wood doors	2.95
S-type-i3 110/90°	90°, 18mm	110°	for wood doors	2.97
S-type 110	0mm	110°	for wood doors	2.99
	9mm	110°	for wood doors	2.99
	15mm	110°	for wood doors	2.99
S-type 110/-15°	-15°, 0mm	110°	for wood doors	2.101
S-type 110/15°	15°, 9mm	110°	for wood doors	2.103
S-type 110/24°	24°, 9mm	110°	for wood doors	2.105
S-type 110/30°	30°, 9mm	110°	for wood doors	2.107
S-type 110/45°	45°, 9mm	110°	for wood doors	2.109
	45°, 18mm	110°	for wood doors	2.109
S-type 110/90°	90°, 18mm	110°	for wood doors	2.111
S-type 110 AL	0mm	110°	for aluminium frame doors	2.113
	9mm	110°	for aluminium frame doors	2.113
	15mm	110°	for aluminium frame doors	2.113
S-type 110 unsprung hinge	0mm	110°	for wood doors	2.115

	Cranking	Opening angle	Cup type	Page
S-type				
S-type 170	0mm	170°	for wood doors	2.117
	9mm	170°	for wood doors	2.119
S-type for pie-cut corner cabinet			for wood doors	2.121
S-type mounting plates				2.123
S-type mounting plates for face frame cabinets				2.127

	Cranking	Opening angle	Cup type	Page
B-type				
B-type-i3 110	0mm	110°	for wood doors	2.131
	9mm	110°	for wood doors	2.131
	15mm	110°	for wood doors	2.131
B-type-i3 110/30°	30°, 9mm	110°	for wood doors	2.133
B-type-i3 110/45°	45°, 9mm	110°	for wood doors	2.135
	45°, 18mm	110°	for wood doors	2.137
B-type-i3 95°/90°	90°, 18mm	95°	for wood doors	2.139
B-type 110	0mm	110°	for wood doors	2.141
	9mm	110°	for wood doors	2.141
	15mm	110°	for wood doors	2.141
B-type 110/30°	30°, 9mm	95°	for wood doors	2.143
B-type 110/45°	45°, 9mm	110°	for wood doors	2.145
	45°, 18mm	110°	for wood doors	2.147
B-type 110°/90°	90°, 0mm	110°	for wood doors	2.149
	90°, 18mm	95°	for wood doors	2.149
B-type 110 AL	0mm	110°	for aluminium frame doors	2.151
	9mm	110°	for aluminium frame doors	2.151
	15mm	110°	for aluminium frame doors	2.151
B-type 110 AL (Glissando AL ready)	0mm	110°	for aluminium frame doors	2.153
	9mm	110°	for aluminium frame doors	2.153
	15mm	110°	for aluminium frame doors	2.153
B-type 170	0mm	170°	for wood doors	2.155
	9mm	170°	for wood doors	2.157
B-type for pie-cut corner cabinet			for wood doors	2.159
B-type flap door hinge	0mm	90°	for wood doors	2.161
B-type mounting plates				2.163

	Opening angle	Cup type	Page
--	---------------	----------	------

Other Hinges and Accessories

Wide angle hinge and mounting plate	270°	for wood doors	2.167
Refrigerator cabinet hinge and mounting plate	100°	for wood doors	2.169
Hinge angle restrictors			2.171
Cover caps			2.173

Glissando Soft Closing Systems for Hinges

Glissando TT			2.183
Glissando TL3			2.183
Glissando TL 170			2.185
Glissando AL			2.187
Glissando CR			2.189

TouchControl Solutions

Push Latch S3			2.193
Push Latch S2			2.197
Push Latch			2.199
PushOpen Short			2.201
PushOpen Long			2.203

Concealed Hinges


Door Overlay

How to Achieve the Desired Door Overlay?


By choosing the hinge of appropriate cranking

Concealed hinges with specific hinge arms are available for different door overlays. The most common overlays are:

■ Cabinet side
■ Door



- 1. Full overlay**
Use a hinge with 0mm cranking



- 2. Partial overlay for double doors**
Use a hinge with 5mm or 9mm cranking




- 3. Inset door**
Use a hinge with 15mm or 17mm cranking

By choosing the mounting plates of appropriate thickness

To achieve the desired overlay (x) while using a determined drilling distance (K), a mounting plate of appropriate

thickness (D) must be chosen from the enclosed table or calculated with given formula.




x	4	5	6	7	8	9
3	3	2	1	0		
K 4		3	2	1	0	
5			3	2	1	0

$D=4+K-x$

By choosing the appropriate drilling distance K



To achieve the desired door overlay (x) while using a determined mounting plate thickness (D), an appropriate drilling distance K must be chosen.



x	4	5	6	7	8	9
0				3	4	5
1			3	4	5	
D 2				5		
3	3	4	5			

Through side adjustment


Side adjustment is made by rotating the appropriate screw on the hinge arm.



Door clearance and gap

Door clearance ($F \geq F_{min}$) and gap (Z) represent the minimal necessary space needed for the correct opening and closing of the door. The minimal required values depend on the cup drilling distance (K), door thickness (V)

and the type of hinge. The minimum clearance scale can be found on product pages → see Door clearance chart. When using hinges with partial overlay the door clearance must be twice as large ($F \geq 2F_{min}$).



V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap $Z_{min}=0$

Concealed Hinges

Hinge Cup Types


How to Mount the Hinge on the Door?

There are cup type symbols listed on product pages beside item numbers. Below you can find their explanation.

There are cup type symbols listed on product pages beside item numbers. Below you can find their explanation.




No pre-mounting

The hinge is fixed on the door with two screws.
3mm pilot holes recommended.






PressTo tool-less mounting

The hinge is inserted into cup hole and locked in place without tools



EasyFix


Quarter turn fixing for 8mm holes (interaxis 45/9.5) or 10mm holes (interaxis 48/6 and 52/5.5).







Machine insertion ready hinge cup

Pre-mounted dowels suitable for machine
insertion into 8mm holes (interaxis 45/9.5)
or 10mm holes (interaxis 48/6 and 52/5.5)



FastFix

Pre-mounted expanding dowels with
triple-start screw for fast fixing, suitable
for 8mm holes.



Concealed Hinges








Drilling Details

Drilling Patterns for Hinge Cup

Interaxis
45mm, 48mm and 52mm*

· T-type, S-type, B-type

**Available on special request → see page 0.3*

Hinge cup type	Interaxis 45mm	Interaxis 48mm
	Drilling pattern	Drilling pattern
Screw-on ready 	Pre-mounted Ø4.5mm screws  	
Machine insertion ready 	FastFix  EasyFix  	
Pre-mounted euro screws 		
Tool-less mounting  PressTo		

Interaxis is the distance between
two holes center for fixing screws on the hinge cup.

Concealed Hinges

Mounting Plate Type


How to Fix the Mounting Plate on the Cabinet Side?

There are mounting plate type symbols listed on product pages beside item numbers. Below you can find their explanation.




Chipboard screw-on ready

Mounting plate is fixed with two chipboard screws or equivalent.
3mm pilot holes recommended.




Euro screw ready

Fixing with 6.3mm euro screws into pre-drilled 5mm holes. To choose appropriate head and length for use with this mounting plate is recommended.




Machine insertion ready

Pre-mounted dowels for machine insertion into pre-drilled 10mm holes.




Pre-mounted euro screws

Euro screws for 5mm holes are pre-mounted on the mounting plate.
Available lengths: 11mm, 13mm and 15mm




Pre-mounted expanding dowels

Pre-mounted expanding dowels for 5mm holes.
Available lengths: 7.5mm and 10.5mm



Pre-mounted Ø4.5mm screws

Mounting plate is fixed with two pre-mounted chipboard screws.
3mm pilot holes recommended.



Concealed Hinges

Hinge-to-plate Mounting


How to Assemble the Hinge and the Mounting Plate?

T-type 3Way snap-on


3Way snap-on mounting for intuitive hinge-to-plate assembly in three directions:

- from the hinge arm front
- from the hinge arm rear
- from the top

rear assembly

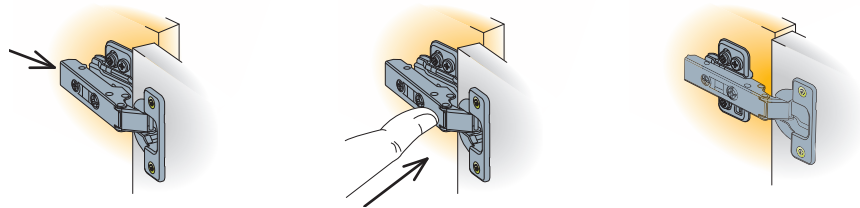


front assembly

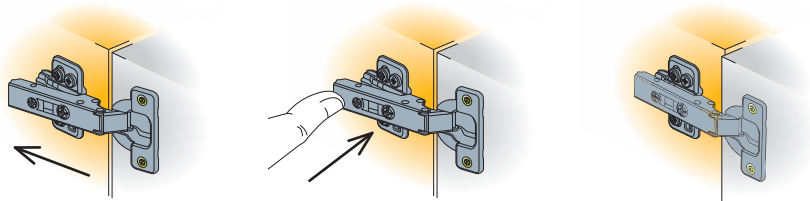

top assembly




disassembly:
for disassembly press rear
lever on the hinge arm.

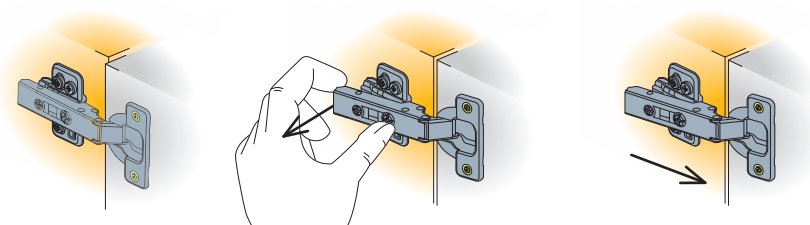

S-type snap-on

Door is assembled on the cabinet side simply by positioning the two hooks under the hinge arm on the outer part of the mounting plate and pressing gently on the rear part of the hinge arm.

For disassembly press the rear button on the hinge arm.

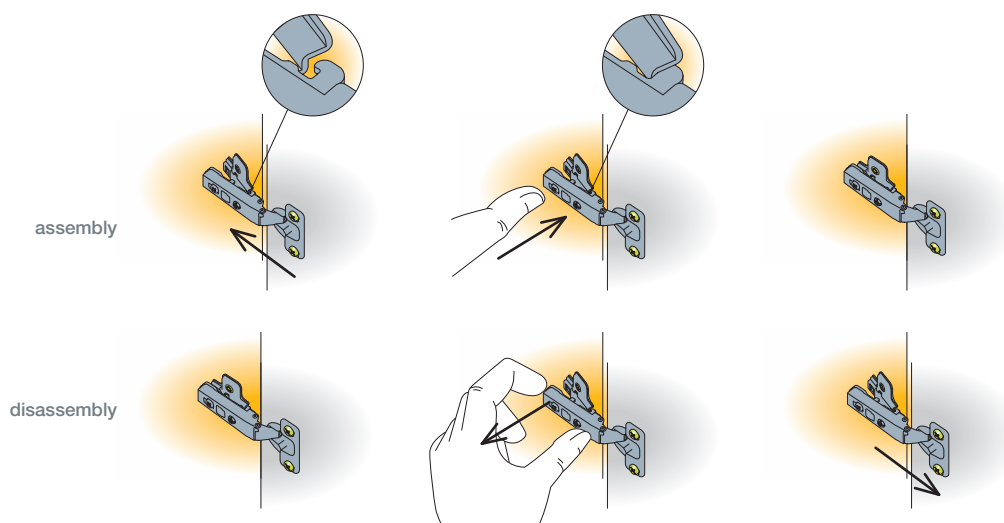

B-type slide-on

Hinge is assembled by sliding the hinge arm over the mounting plate. The hinge adjustment screw must fit into the groove on the mounting plate.

After adjusting the door depth, the mounting procedure is finished by tightening the fixing screw.




Key-hole

- Wide angle hinge
- Refrigerator cabinet door hinge

Hinge is assembled on the mounting plate by inserting the fixing screw on the appropriate hole on the hinge arm.

After adjusting the door depth, the mounting procedure is finished by tightening the fixing screw.

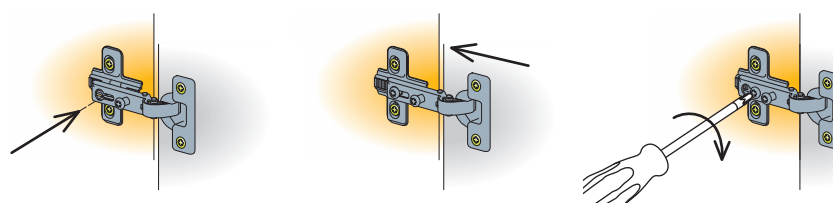

Concealed Hinges


Loads

How Many Hinges per Door?


Check the enclosed recommendation for the number of recommended hinges per door by considering door height and weight.
Hinges to be positioned as far apart as possible.

Recommendation:
Use the appropriate number of hinges, not exceeding door height and weight as shown below.

- Self-closing hinges
- Hinges without spring
- Hinges with integrated damping

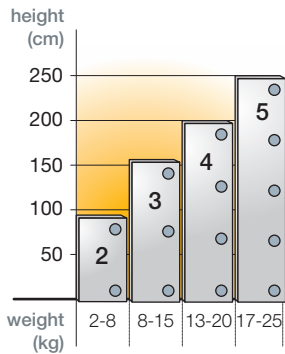

T-type
T-type-i

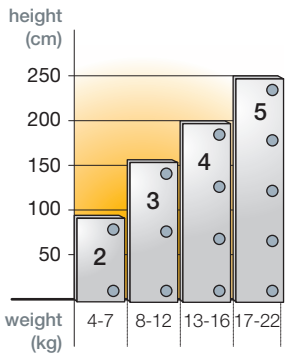

S-type
B-type
S-type-i3
B-type-i3

Hinges with integrated damping can be combined with non-damped hinges from standard hinge range.
A trial mounting is always recommended.


Concealed Hinges

Adjustments



Adjustment range can be found on the product pages.

Side Adjustment






Side adjustment aligns the door with the side of the cabinet.

By rotating the adjustment screw

- T-type
- S-type
- B-type

Side adjustment is made by rotating the screw on the hinge arm.

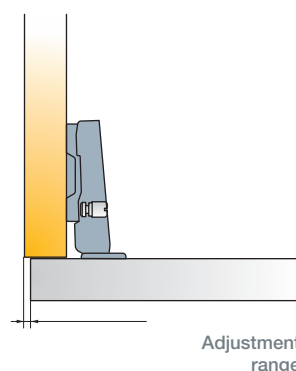



By temporarily loosening the fixing screw

- Wide angle hinge 270°
- Refrigerator cabinet hinge

For the side adjustment:

1. Release the fixing screw
2. Make the necessary adjustment by rotating the appropriate screw
3. Tighten the fixing screw


Without releasing the fixing screw no side adjustment is possible.

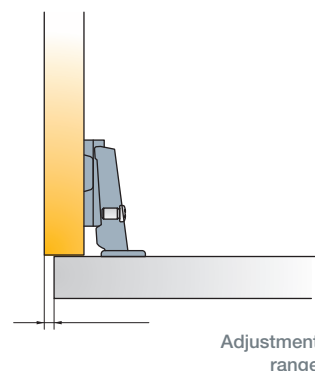

Concealed Hinges

Adjustments

Height Adjustment





Height adjustment is necessary to achieve optimal vertical door position.

By rotating the cam adjuster



Height adjustment is made by rotating the cam adjuster on the mounting plate.

T-type with cam adjustable cruciform mounting plate

S-type with cam adjustable cruciform mounting plate





T-type with cam adjustable horizontal mounting plate



By releasing the fixing screws

For height adjustment the two mounting plate fixing screws have to be temporarily released while making the manual adjustment.

- T-type, S-type and B-type with cruciform mounting plate
- Wide angle hinge 270°
- Refrigerator cabinet hinge




Concealed Hinges

Adjustments



Adjustment range can be found on the product pages.

Depth Adjustment





The system enables easy adjustment of the gap between door and cabinet.

By rotating the cam adjuster

Rotate the cam adjuster on the hinge arm.



- T-type



By releasing the fixing or adjustment screw

- S-type
- B-type

The depth adjustment is made by temporarily releasing the adjustment screw (S-type) or fixing screw (B-type). After the adjustment is made the screw has to be re-tightened.




Concealed Hinges

Adjustments

Damping Adjustment

T-type-i

The damping action can be adjusted to fit different door weights and sizes which enables optimal door functioning.

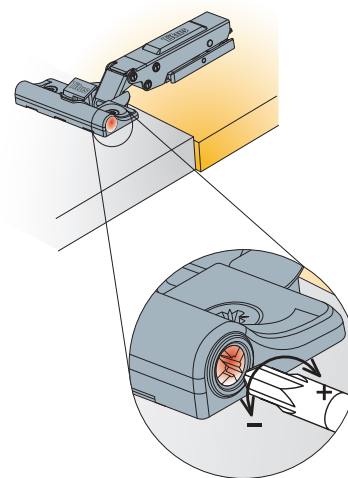


Damping is factory pre-set to the medium damping value.
Turn towards '+' to increase and '-' to decrease the damping.

Key Design Choices


ConfidentClose

The hinge is designed to provide consumer preferred way of soft closing action.


Based on results of Titus researches made in UK, Germany and Slovenia



Fast closing



Late start of deceleration action




Quiet landing with SoftTouch

One-for-all efficiency principle

Damping on the hinge cup
Damper, positioned transversal to the hinge cup allows for easy introduction of hinge versions


Damped and non-damped version on one mounting plate platform



Adjustable damping

Flexibility to tune performance for all applications

- Consistent performance over a wide range of doors of different sizes and weights
- Easy accessible adjustment button for intuitive and quick adjustment




Adjustable damping zone and force

Titus Damper Inside

- Efficient damping at any closing speed
- Reliable closing
- Damping force consistency



T-type Hinges




T-type PressTo Tool-free hinge cup fixing

- Effortless press-in locking
- Confident locking action
- Reliable door attachment
- Confident and repeatable assembly




T-type-i 170

- Wide angle hinge with integrated damping
- Zero-protrusion opening angle makes it ideal for interior drawers application

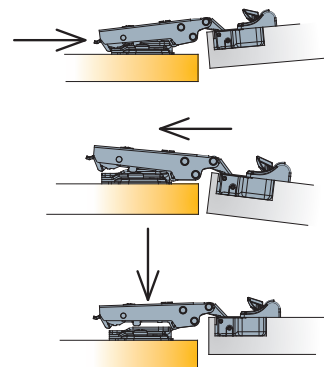


3Way snap-on mounting

- Mounting from three directions: rear, front, top
- Reduced assembly time




Easy door installation even on tall and heavy door

- Easy mounting of doors with four or more hinges



Highly tolerant

- Efficient performance in edge value of tolerances
- Reliable door closing in case of accidental misalignment
- ConfidentClose assured

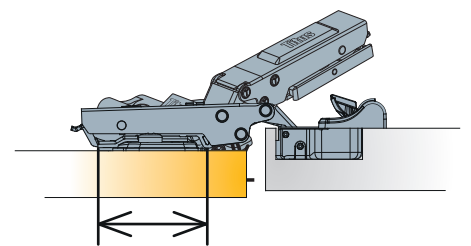


Rigidity


- Tight hinge-to-plate joint improves hinge stability and reduces door sag
- Enhanced door stability
- Smooth performance

T-type-i 110

For wood doors




- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system



110°
35mm
12mm,
12.5mm PressTo
3Way snap-on



Technical details



Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-0AT0-054	701-0AS0-054
Machine insertion	701-0AT1-054	701-0AS1-054
EasyFix	701-0AT4-054	701-0AS4-054
PressTo	701-0AT6-054	

Drilling patterns for hinge cups → see page 2.15

Cranking

0mm





150 Pcs

Made of steel

Cranking

5mm



Screw-on	701-0BT0-054	701-0BS0-054
Machine insertion	701-0BT1-054	701-0BS1-054
EasyFix	701-0BT4-054	701-0BS4-054
PressTo	701-0BT6-054	

Drilling patterns for hinge cups → see page 2.15



150 Pcs

Made of steel

Mounting plates

→ see pages 2.79-2.84




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

If not pre-mounted



820-6328-050



10000 Pcs

Hinge angle restrictor

→ see page 2.171




TouchControl solutions


→ see pages 2.193-2.204




Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm





Depth
adjustment
+4/-1mm


For further explanation → see page 2.23

For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11

X	13	14	15	16	17	18	19
K	3	2	1	0			
	4	3	2	1	0		
	5	4	3	2	1	0	
	6		4	3	2	1	0




$$D=13+K-X$$

Drawings show application on
D=0mm mounting plate

X	8	9	10	11	12	13	14
---	---	---	----	----	----	----	----

K	3	2	1	0			
	4	3	2	1	0		
	5	4	3	2	1	0	
	6		4	3	2	1	0


$$D=8+K-X$$

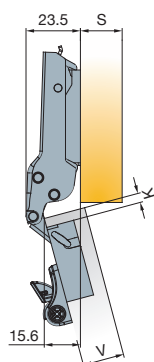

Drawings show application on
D=0mm mounting plate

Door clearance at R=1mm

For further explanation → see page 2.12




V		16	17	18	19	20	21	22	23	24	25	26	
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5	
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5	
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5	
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9	F _{MIN}


Gap $Z_{MIN}=0$

T-type-i 110

For wood doors




- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system



110°
35mm
12mm,
12.5mm PressTo
3Way snap-on



Technical details




Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-OCT0-054	701-OCS0-054
Machine insertion	701-OCT1-054	701-OCS1-054
EasyFix	701-OCT4-054	701-OCS4-054
PressTo	701-OCT6-054	

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm




150 Pcs

Made of steel

Cranking

17mm



Screw-on	701-0DT0-054	701-0DS0-054
Machine insertion	701-0DT1-054	701-0DS1-054
EasyFix	701-0DT4-054	701-0DS4-054
PressTo	701-0DT6-054	

Drilling patterns for hinge cups → see page 2.15

150 Pcs

Made of steel

Mounting plates

→ see pages 2.79-2.84




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

If not pre-mounted



820-6328-050

10000 Pcs

Hinge angle restrictor

→ see page 2.171




TouchControl solutions


→ see pages 2.193-2.204




Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm






Depth
adjustment
+4/-1mm

For further explanation → see page 2.23

For further explanation → see pages 2.20-2.22

Mounting details

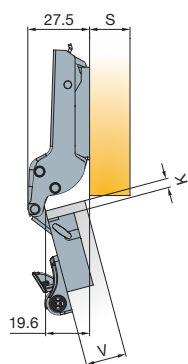

Drawings show application on
D=0mm mounting plate




Mounting plate drilling distance

Mounting plate thickness table

For further explanation → see page 2.11

X	4	5	6	7	8	9	10
K	3	2	1	0			
	4	3	2	1	0		
	5	4	3	2	1	0	
	6		4	3	2	1	0

$$D = 4 + K - X$$

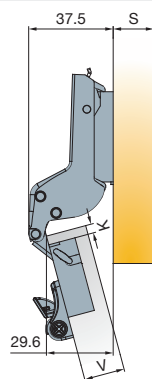


Drawings show application on
D=2mm mounting plate

V	16	17	18	19	20	21	22	23	24
K	3	0	0	0	0	1	1	1	2
	4	1	1	1	2	2	2	2	3
	5	2	2	2	3	3	3	3	4
	6	3	3	3	4	4	4	4	

$$D = -4 + K + F$$

Door clearance at R=1mm

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6

Gap $Z_{MIN}=0$

T-type-i 110/15°

15° angled application for wood doors



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-0D64-650	701-0D66-650
Machine insertion	701-0D70-650	701-0D72-650
EasyFix	701-0D76-650	701-0D78-650

Drilling patterns for hinge cups → see page 2.15

Cranking
9mm



100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050



10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl solutions
→ see pages 2.193-2.204




Damping adjustment




For further explanation → see page 2.23

Door adjustment

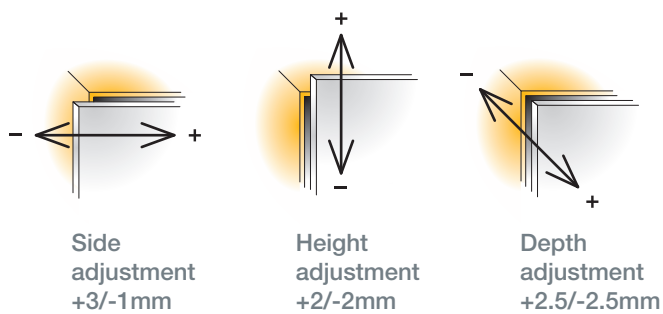



For further explanation → see pages 2.20-2.22

Mounting details

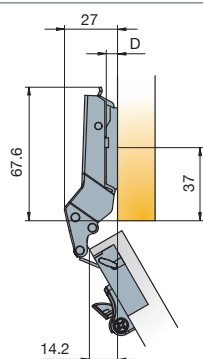

Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table

For further explanation → see page 2.11

P	11	12	13	14	15	16	17	18
3	4	3	2	1	0			
4		4	3	2	1	0		
5			4	3	2	1	0	
6				4	3	2	1	0

Door clearance at R=1mm

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	23	24	25	26
3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type-i 110/30°

30° angled application for wood doors



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-0E52-650	701-0E54-650
Machine insertion	701-0E58-650	701-0E60-650
EasyFix	701-0E64-650	701-0E66-650

Drilling patterns for hinge cups → see page 2.15

Cranking
9mm



100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050




Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204




Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm




Depth
adjustment
+2.5/-2.5mm


For further explanation → see page 2.23

For further explanation → see pages 2.20-2.22

Mounting details

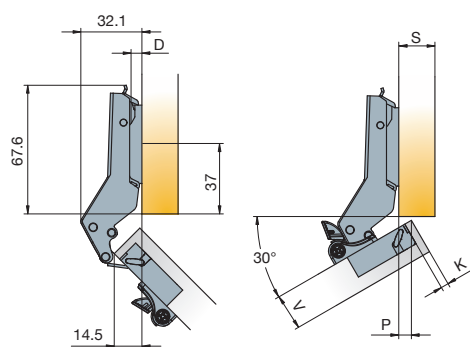

Mounting plate drilling distance



Mounting plate thickness table


For further explanation → see page 2.11

P		1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5	
K	3	4	3	2	1	0				
	4	4		3	2	1	0			
	5	4			3	2	1	0		
	6					4	3	2	1	0

Drawings show application on
D=0mm mounting plate

Door clearance at R=1mm

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	23	24	25	26	
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type-i 110/45°

45° angled application for wood doors



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-0D82-650	701-0D84-650
Machine insertion	701-0D88-650	701-0D90-650
EasyFix	701-0D98-650	701-0E32-650

Drilling patterns for hinge cups → see page 2.15



Cranking
9mm



100 Pcs

Cup made of steel, arm made of zinc

Cranking
17mm



100 Pcs

Cup made of steel, arm made of zinc

Screw-on	701-0B08-650	701-0B10-650
Machine insertion	701-0C78-650	701-0C80-650
EasyFix	701-0C54-650	701-0C56-650

Drilling patterns for hinge cups → see page 2.15


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs


Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Damping adjustment





Door adjustment

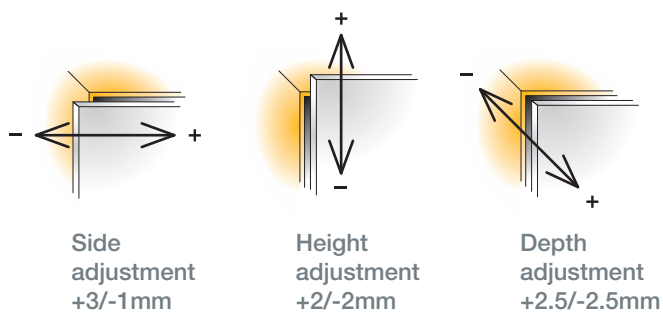


For further explanation → see page 2.23

For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance






Mounting plate thickness table

For further explanation → see page 2.11

P	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5	13	13.5
K	3	4	3		2		1		0					
	4		4		3		2		1		0			
	5			4		3		2		1		0		
	6					4		3		2		1		0

Drawings show application on D=0mm mounting plate




P	0	0.5	1	1.5	2	2.5	3	3.5	4
K	3		2		1		0		
	4	3		2		1		0	
	5		3		2		1		0
	6	4		3		2		1	0 D

Drawings show application on D=0mm mounting plate

Door clearance at R=1mm

For further explanation → see page 2.12





V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type-i 110/45°


45° angled application for wood doors

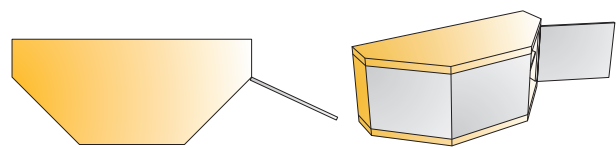


- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details



Cranking
23mm



Cup type	Interaxis 45mm	Interaxis 48mm
	 Item number	 Item number
Screw-on	701-0W59-650	701-0W60-650
Machine insertion	701-0W62-650	701-0W63-650
EasyFix	701-0W65-650	701-0W66-650

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs


Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204




Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm




Depth
adjustment
+2.5/-2.5mm



For further explanation → see page 2.23

For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance




Mounting plate thickness table

For further explanation → see page 2.11

P	7.5	7	6.5	6	5.5	5	4.5	4	3.5	3	2.5	2	1.5
K	3	4	3	2	1	0							
	4	4	3	2	1	0							
	5		4	3	2	1	0						
	6			4	3	2	1	0					

Door clearance at R=1mm

For further explanation → see page 2.12





V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type-i 110/90°

For wood door cabinets with blind panels



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-0A96-650	701-0A98-650
Machine insertion	701-0D36-650	701-0D38-650
EasyFix	701-0D30-650	701-0D32-650

Drilling patterns for hinge cups → see page 2.15

Cranking
17mm



100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050




Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Damping adjustment




Door adjustment

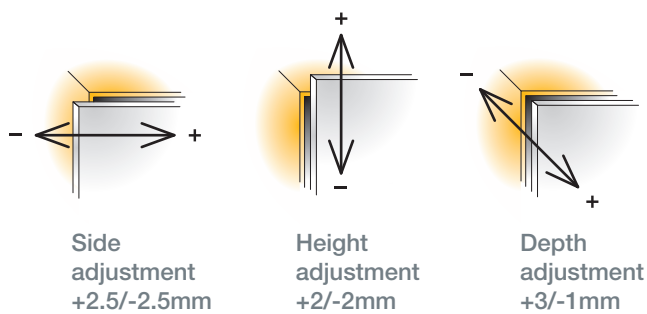

For further explanation → see page 2.23


For further explanation → see pages 2.20-2.22

Mounting details




Drawing shows application on D=2mm mounting plate

Mounting plate drilling distance




Drawing shows application on D=2mm mounting plate



Door clearance at R=1mm

For further explanation → see page 2.12






V	16	17	18	19	20	21	22	23	24	25	26
3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9 F _{MIN}

Gap Z_{MIN}=0

T-type-i 120

For wood doors



- Opening angle 120°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-OUT0-054	701-0US0-054
Machine insertion	701-OUT1-054	701-0US1-054
EasyFix	701-OUT4-054	701-0US4-054

Drilling patterns for hinge cups → see page 2.15

Cranking 0mm



150 Pcs

Made of steel


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted




820-6328-050
10000 Pcs

TouchControl solutions
→ see pages 2.193-2.204




Damping adjustment




For further explanation → see page 2.23

Door adjustment

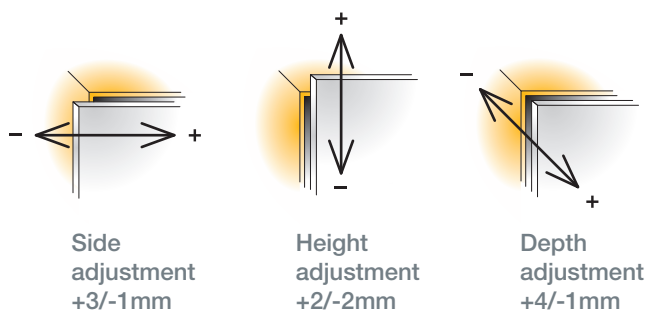



For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance



Mounting plate thickness table


For further explanation → see page 2.11

X	13	14	15	16	17	18	19
K	3	2	1	0			
	4	3	2	1	0		
	5	4	3	2	1	0	
	6		4	3	2	1	0

$$D=13+K-X$$

Door clearance at R=1mm

For further explanation → see page 2.12






V	16	17	18	19
3	1.1	0.4	0	0
K	4	2	1.4	0.7
	5	3	2.3	1

Gap Z_{MIN} = 2

T-type-i 95 Thick Door Hinge


For wood doors




- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 95°
35mm
12mm
3Way snap-on



Technical details





Cranking
0mm



150 Pcs Made of steel

Cranking
5mm



150 Pcs Made of steel

Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



TouchControl solutions
→ see pages 2.193-2.204




Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	708-0XT0-054	708-0XS0-054
Machine insertion	708-0XT1-054	708-0XS1-054
EasyFix	708-0XT4-054	708-0XS4-054

Drilling patterns for hinge cups → see page 2.15

Screw-on	708-0YT0-054	708-0YS0-054
Machine insertion	708-0YT1-054	708-0YS1-054
EasyFix	708-0YT4-054	708-0YS4-054


Drilling patterns for hinge cups → see page 2.15

Hinge cup screws
If not pre-mounted




820-6328-050
10000 Pcs


Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm






Depth
adjustment
+4/-1mm

For further explanation → see page 2.23

For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0mm mounting plate




Mounting plate drilling distance

Mounting plate thickness table

For further explanation → see page 2.11

X	13	14	15	16	17	18	19	20	21	22
3	3	2	1	0						
4	4	3	2	1	0					
5		4	3	2	1	0				
K 6			4	3	2	1	0			
7				4	3	2	1	0		
8					4	3	2	1	0	
9						4	3	2	1	0

$$D=13+K-X$$

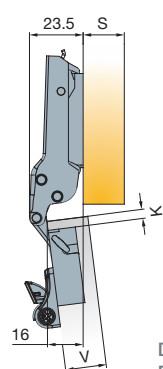


Drawings show application on
D=0mm mounting plate

X	8	9	10	11	12	13	14	15	16	17
3	3	2	1	0						
4	4	3	2	1	0					
5		4	3	2	1	0				
K 6			4	3	2	1	0			
7				4	3	2	1	0		
8					4	3	2	1	0	
9						4	3	2	1	0

$$D=8+K-X$$

Gap Z

V	20	22	24	26	28	30	32	34	
3	0	0	0	0	0	0	0	0	
4	0	0	0	0	0	0	0	0	
5	0	0	0	0	0	0	0	0	
K 6	0	0	0	0	0	0	0	0	
7	0	0	0	0	0	0	0	0	
8	0	0	0	0	0	0	0	0	
9	0	0	1.6	1.7	1.8	2.0	2.1	2.3	Z _{MIN}



Door clearance at R=1mm




For further explanation → see page 2.12

V	20	22	24	26	28	30	32	34	
3	0.6	0.9	1.3	1.7	2.2	4.0	5.9	7.8	
4	0.6	0.9	1.2	1.7	2.2	3.4	5.2	7.1	
5	0.6	0.9	1.2	1.6	2.1	2.9	4.6	6.5	
K 6	0.6	0.9	1.2	1.5	2.1	2.6	4.1	5.9	
7	0.6	0.9	1.2	1.5	2.1	2.6	3.6	5.3	
8	0.6	0.8	1.2	1.5	2.0	2.5	3.2	4.8	
9	0.6	0.8	1.2	1.5	2.0	2.5	3.1	4.4	F _{MIN}



T-type-i 95 Thick Door Hinge


For wood doors




- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 95°
35mm
12mm
3Way snap-on



Technical details




Cranking
9mm



150 Pcs

Made of steel

Cranking
17mm



150 Pcs

Made of steel

Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



TouchControl solutions
→ see pages 2.193-2.204




	Interaxis 45mm	Interaxis 48mm
Cup type	Item number	Item number
	708-0ZT0-054	708-0ZS0-054
	708-0ZT1-054	708-0ZS1-054
	708-0ZT4-054	708-0ZS4-054

Drilling patterns for hinge cups → see page 2.15

	708-0WT0-054	708-0WS0-054
	708-0WT1-054	708-0WS1-054
	708-0WT4-054	708-0WS4-054


Drilling patterns for hinge cups → see page 2.15

Hinge cup screws
If not pre-mounted




820-6328-050
10000 Pcs


Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm






Depth
adjustment
+4/-1mm

For further explanation → see page 2.23

For further explanation → see pages 2.20-2.22

Mounting details

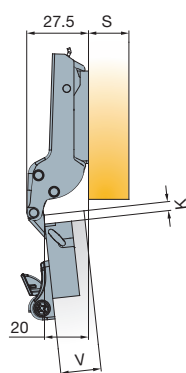

Drawings show application on
D=0mm mounting plate




Mounting plate drilling distance

Mounting plate thickness table

For further explanation → see page 2.11

X	4	5	6	7	8	9	10	11	12	13
3	3	2	1	0						
4	4	3	2	1	0					
5		4	3	2	1	0				
K 6			4	3	2	1	0			
7				4	3	2	1	0		
8					4	3	2	1	0	
9						4	3	2	1	0

$$D = 4 + K - X$$

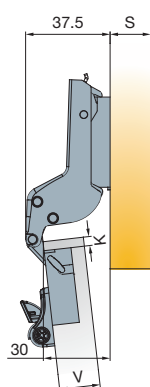


Drawings show application on
D=2mm mounting plate

V	20	22	24	26	28	30	32
3	0	0	1	1	2	3	4*
4	1	1	2	2	3	4	4*
K 5	2	2	3	3	4	4	4*
6	3	3	4	4	4*	4*	
7	4	4	4*	4*	4*	4*	

$$D = -4 + K + F$$

*Hinge adjustment needed

Gap Z




V	20	22	24	26	28	30	32	34
3	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0
K 6	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0
9	0	0	1.6	1.7	1.8	2.0	2.1	2.3

Z_{MIN}

Door clearance at R=1mm

For further explanation → see page 2.12






V	20	22	24	26	28	30	32	34
3	0.6	0.9	1.3	1.7	2.2	4.0	5.9	7.8
4	0.6	0.9	1.2	1.7	2.2	3.4	5.2	7.1
5	0.6	0.9	1.2	1.6	2.1	2.9	4.6	6.5
K 6	0.6	0.9	1.2	1.5	2.1	2.6	4.1	5.9
7	0.6	0.9	1.2	1.5	2.1	2.6	3.6	5.3
8	0.6	0.8	1.2	1.5	2.0	2.5	3.2	4.8
9	0.6	0.8	1.2	1.5	2.0	2.5	3.1	4.4

F_{MIN}

T-type-i 170

For wood doors



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 165°
35mm
12mm,
12.5mm PressTo
3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-0ET0-054	701-0ES0-054
Machine insertion	701-0ET1-054	701-0ES1-054
EasyFix	701-0ET4-054	701-0ES4-054
PressTo	701-0ET6-054	

Drilling patterns for hinge cups → see page 2.15

Cranking

0mm

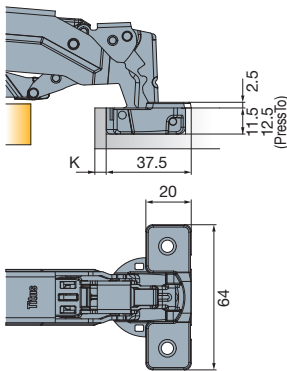

50 Pcs

Made of steel and zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050

10000 Pcs


Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Zero protrusion
with D=0 mounting plate



Door adjustment


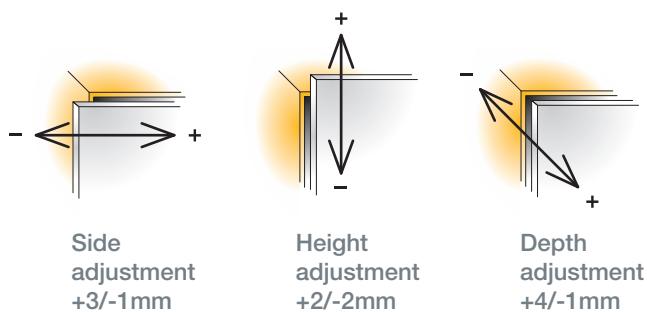


For further explanation → see pages 2.20-2.22

Mounting
details

Mounting plate
drilling distance

Mounting plate thickness table
For further explanation → see page 2.11

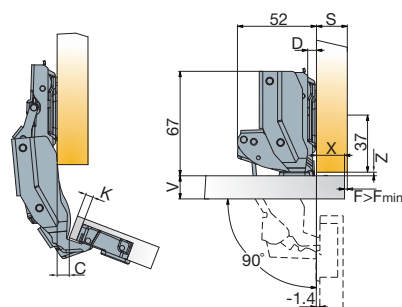

Drawings show application on
D=0mm mounting plate
No door protrusion in
90° position


X	13	14	15	16	17	18	19	20
3	3	2	1	0				
4	4	3	2	1	0			
5		4	3	2	1	0		
6			4	3	2	1	0	
7				4	3	2	1	0

$D=13+K-X$

C value with D=0 mounting plate

K	3	4	5	6	7
	-9.0	-8.1	-7.1	-6.1	-5.2

Door clearance at R=1mm
For further explanation → see page 2.12




V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1


Gap $Z_{MIN}=0.5$

T-type-i 170

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system





165°
35mm
12mm,
12.5mm PressTo
3Way snap-on



Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	701-0FT0-054	701-0FS0-054
Machine insertion	701-0FT1-054	701-0FS1-054
EasyFix	701-0FT4-054	701-0FS4-054
PressTo	701-0FT6-054	
Drilling patterns for hinge cups → see page 2.15		



Cranking
5mm

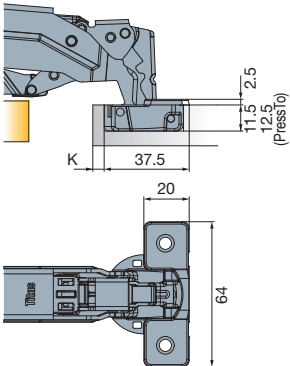

50 Pcs

Made of steel and zinc

Cranking
9mm

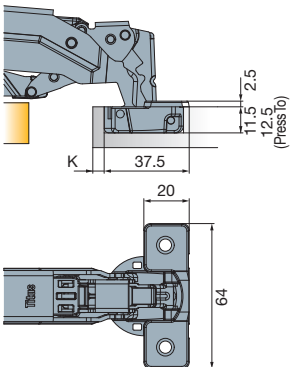

50 Pcs

Made of steel and zinc

Screw-on	701-0GT0-054	701-0GS0-054
Machine insertion	701-0GT1-054	701-0GS1-054
EasyFix	701-0GT4-054	701-0GS4-054
PressTo	701-0GT6-054	
Drilling patterns for hinge cups → see page 2.15		


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs


Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Zero protrusion
with D=0 mounting plate



Door adjustment

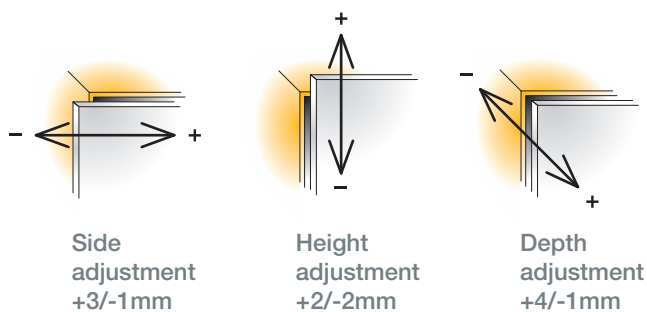


For further explanation → see pages 2.20-2.22

Mounting
details

Mounting plate
drilling distance


Mounting plate thickness table
For further explanation → see page 2.11

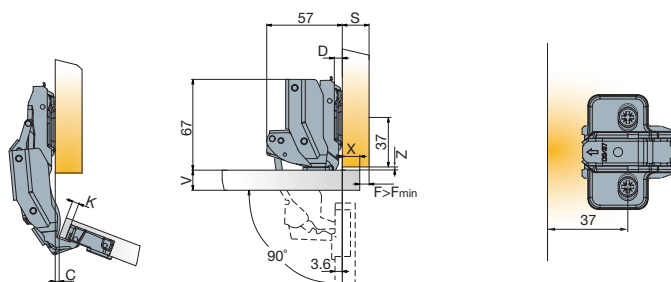

Drawings show application on
D=0mm mounting plate

X	8	9	10	11	12	13	14
3	3	2	1	0			
4	4	3	2	1	0		
5		4	3	2	1	0	
6			4	3	2	1	0

$$D=8+K-X$$

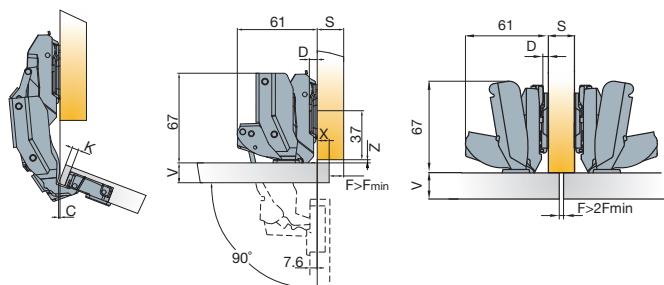


Drawings show application on
D=0mm mounting plate

Drawing show application on
D=0mm mounting plate

X	1	2	3	4	5	6	7	8	9	10	11
3	6			3	2	1	0				
4		6			3	2	1	0			
5			6			3	2	1	0		
6				6			3	2	1	0	
7					6			3	2	1	0

$$D=4+K-X$$

Door clearance at R=1mm
For further explanation → see page 2.12




V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1


Gap $Z_{MIN}=0.5$

T-type 110

For wood doors




- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system



110°
35mm
12mm,
12.5mm PressTo
3Way snap-on




Technical details



Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	702-0AK0-054	702-0AL0-054
Machine insertion	702-0AK1-054	702-0AL1-054
EasyFix	702-0AK4-054	702-0AL4-054
PressTo	702-0AK6-054	
Technical and drilling details → see page 2.15		


Cranking
0mm



150 Pcs

Made of steel

Cranking
5mm



Screw-on	702-0BK0-054	702-0BL0-054
Machine insertion	702-0BK1-054	702-0BL1-054
EasyFix	702-0BK4-054	702-0BL4-054
PressTo	702-0BK6-054	

Drilling patterns for hinge cups → see page 2.15

150 Pcs

Made of steel


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190





Door adjustment

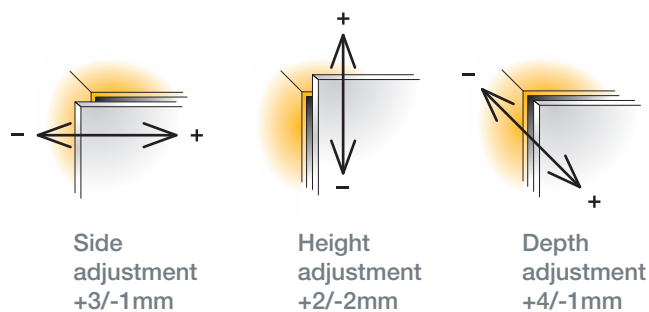


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11

X	13	14	15	16	17	18	19
K	3	2	1	0			
	4	3	2	1	0		
	5	4	3	2	1	0	
	6		4	3	2	1	0




$$D=13+K-X$$

Drawings show application on
D=0mm mounting plate

x	8	9	10	11	12	13	14
---	---	---	----	----	----	----	----

K	3	2	1	0			
	4	3	2	1	0		
	5	4	3	2	1	0	
	6		4	3	2	1	0


$$D=8+K-X$$



Drawings show application on
D=0mm mounting plate

Door clearance at R=1mm

For further explanation → see page 2.12




V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9
		F _{MIN}										


Gap $Z_{MIN}=0$

T-type 110

For wood doors




- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system



110°
35mm
12mm,
12.5mm PressTo
3Way snap-on



Technical details




Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	702-0CK0-054	702-0CL0-054
Machine insertion	702-0CK1-054	702-0CL1-054
EasyFix	702-0CK4-054	702-0CL4-054
PressTo	702-0CK6-054	

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm




150 Pcs

Made of steel

Cranking

17mm



Screw-on	702-0DK0-054	702-0DL0-054
Machine insertion	702-0DK1-054	702-0DL1-054
EasyFix	702-0DK4-054	702-0DL4-054
PressTo	702-0DK6-054	

Drilling patterns for hinge cups → see page 2.15

150 Pcs

Made of steel


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

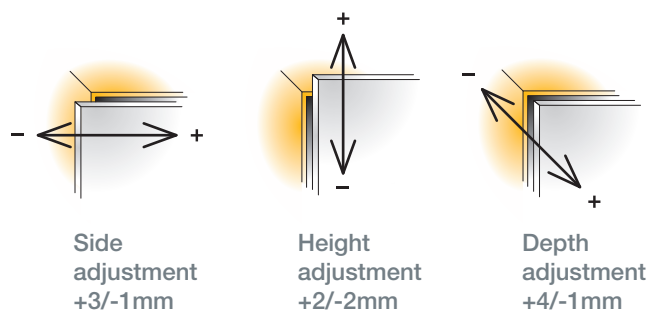


For further explanation → see pages 2.20-2.22

Mounting details

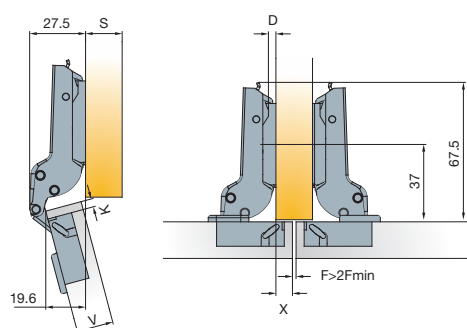

Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11


X	4	5	6	7	8	9	10
3	3	2	1	0			
4	4	3	2	1	0		
5		4	3	2	1	0	
6			4	3	2	1	0

$$D=4+K-X$$

V	16	17	18	19	20	21	22	23	24
---	----	----	----	----	----	----	----	----	----

3	0	0	0	0	1	1	1	1	2
4	1	1	1	1	2	2	2	2	3
5	2	2	2	2	3	3	3	3	4
6	3	3	3	3	4	4	4	4	D


$$D=-4+K+F$$

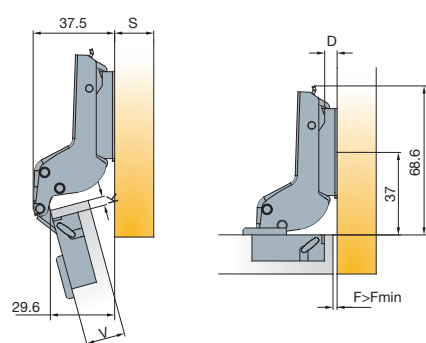

Drawings show application on
D=2mm mounting plate

Door clearance at R=1mm

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	23	24	25	26
3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type 110/15°

15° angled application for wood doors





- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

Cranking
9mm



Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	702-0D63-650	702-0D65-650
Machine insertion	702-0D69-650	702-0D71-650
EasyFix	702-0D75-650	702-0D77-650

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

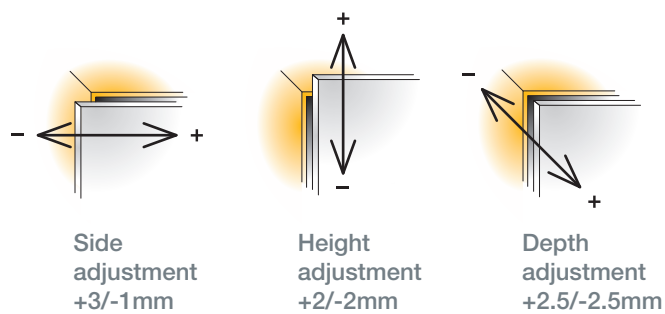



For further explanation → see pages 2.20-2.22

Mounting details

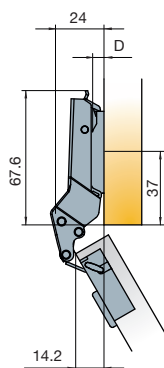


Drawings show application on D=0mm mounting plate

Mounting plate drilling distance



Mounting plate thickness table For further explanation → see page 2.11

P	11	12	13	14	15	19	17	18
3	4	3	2	1	0			
4		4	3	2	1	0		
5			4	3	2	1	0	
6				4	3	2	1	0





Door clearance at R=1mm For further explanation → see page 2.12

V	16	17	18	19	20	21	22	23	24	25	26
3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type 110/30°

30° angled application for wood doors

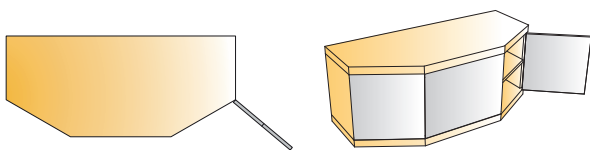



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

Cranking
9mm



Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	702-0E51-650	702-0E53-650
Machine insertion	702-0E57-650	702-0E59-650
EasyFix	702-0E63-650	702-0E65-650

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190



Door adjustment

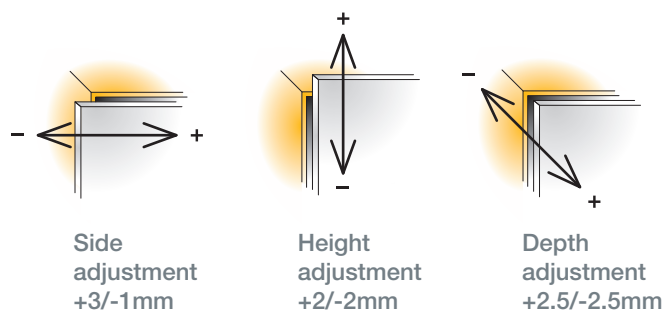


For further explanation → see pages 2.20-2.22

Mounting details

Mounting plate drilling distance

Mounting plate thickness table For further explanation → see page 2.11

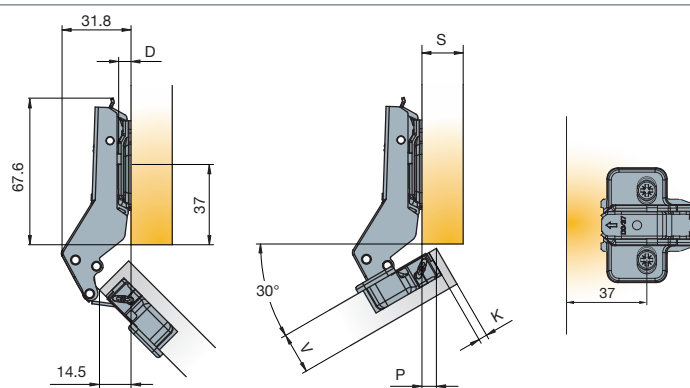


Drawings show application on
D=0mm mounting plate

P	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5
3	4	3	2	1	0			
4		4	3	2	1	0		
5			4	3	2	1	0	
6				4	3	2	1	0

Door clearance at R=1mm

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	23	24	25	26
3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type 110/45°

45° angled application for wood doors





- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number

Cranking
9mm





	702-0D81-650	702-0D83-650
	702-0D87-650	702-0D89-650
	702-0D97-650	702-0E18-650

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel, arm made of zinc

Cranking
17mm



	702-0B07-650	702-0B09-650
	702-0C77-650	702-0C79-650
	702-0C53-650	702-0C55-650

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

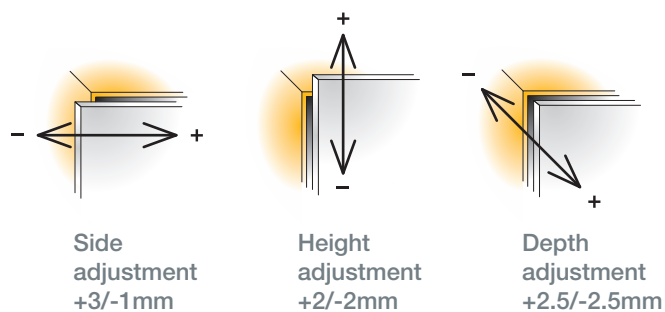


For further explanation → see pages 2.20-2.22

Mounting details

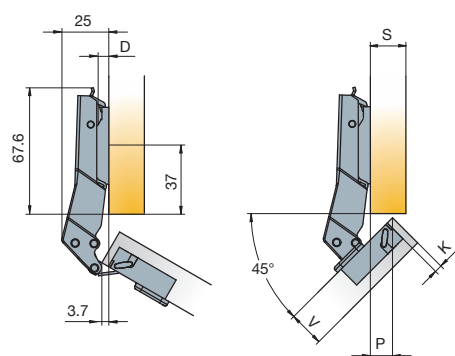


Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table For further explanation → see page 2.11

P	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5	13	13.5
K	3	4	3		2		1		0					
	4		4		3		2		1		0			
	5			4		3		2		1		0		
	6					4		3		2		1		0

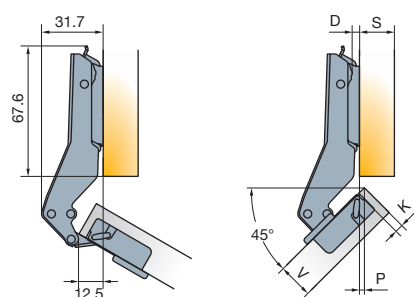


Drawings show application on
D=0mm mounting plate



P	0	0.5	1	1.5	2	2.5	3	3.5	4
K	3		2		1		0		
	4	3		2		1		0	
	5		3		2		1		0
	6	4		3		2		1	0

Door clearance at R=1mm For further explanation → see page 2.12





V		16	17	18	19	20	21	22	23	24	25	26	
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5	
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5	
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5	
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9	F _{MIN}

Gap Z_{MIN}=0

T-type 110/90°

For wood door cabinets with blind panels




- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

Cranking
17mm



Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	702-0A95-650	702-0A97-650
Machine insertion	702-0D35-650	702-0D37-650
EasyFix	702-0D29-650	702-0D31-650

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




· We advise combining with a D=2mm mounting plate.

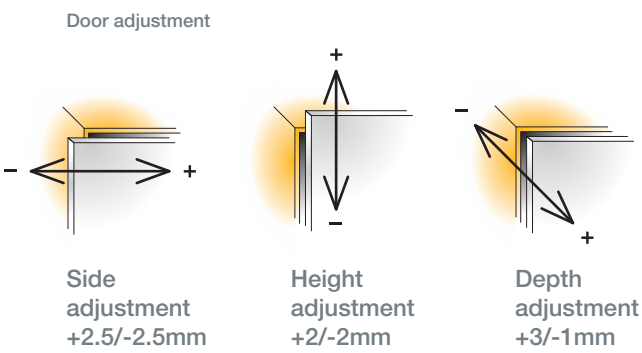


For further explanation → see pages 2.20-2.22

Mounting details




Drawing shows application on D=2mm mounting plate


Mounting plate drilling distance



Drawing shows application on D=2mm mounting plate



Door clearance at R=1mm
For further explanation → see page 2.12






V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

F_{MIN}

Gap Z_{MIN}=0

T-type 120

For wood doors



- Opening angle 120°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	702-0UK0-054	702-0UL0-054
Machine insertion	702-0UK1-054	702-0UL1-054
EasyFix	702-0UK4-054	702-0UL4-054

Drilling patterns for hinge cups → see page 2.15

Cranking

0mm



150 Pcs

Made of steel


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs


TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

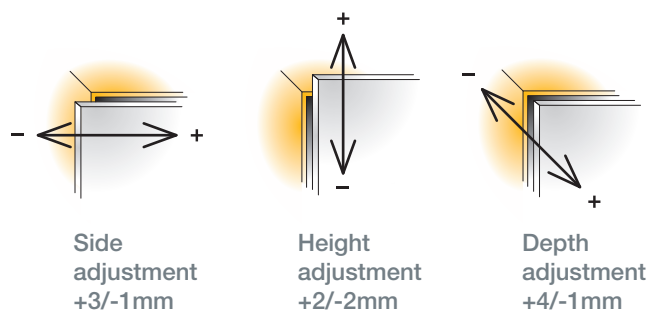


For further explanation → see pages 2.20-2.22

Mounting details

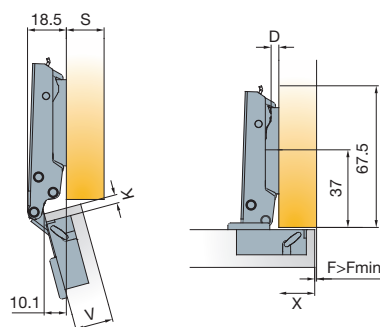

Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance



Mounting plate thickness table


For further explanation → see page 2.11

X	13	14	15	16	17	18	19
3	3	2	1	0			
4	4	3	2	1	0		
K							
5		4	3	2	1	0	
6			4	3	2	1	0
							D

$$D=13+K-X$$

Door clearance at R=1mm

For further explanation → see page 2.12






V	16	17	18	19
3	1.1	0.4	0	0
K				
4	2	1.4	0.7	0.1
5	3	2.3	1.6	1
				F _{MIN}

Gap Z_{MIN} =2

T-type 95 Thick Door Hinge

For wood doors





- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

95°
35mm
12mm
3Way snap-on






Technical details

	Interaxis 45mm	Interaxis 48mm
		
Cup type	Item number	Item number

Cranking

0mm



	707-0XK0-054	707-0XL0-054
	707-0XK1-054	707-0XL1-054
	707-0XK4-054	707-0XL4-054


Drilling patterns for hinge cups → see page 2.15

150 Pcs

Made of steel

Cranking

5mm



	707-0YK0-054	707-0YL0-054
	707-0YK1-054	707-0YL1-054
	707-0YK4-054	707-0YL4-054

Drilling patterns for hinge cups → see page 2.15

150 Pcs

Made of steel


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs


TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190





Door adjustment

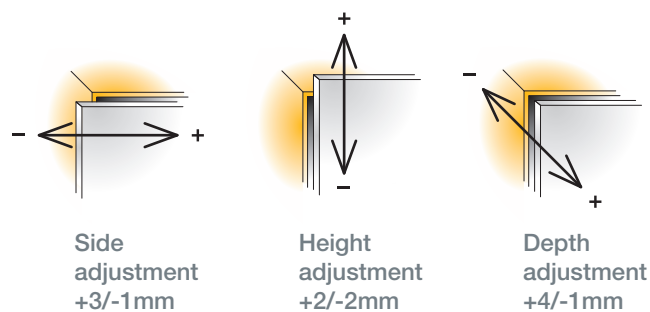


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance






Mounting plate thickness table

For further explanation → see page 2.11

X	13	14	15	16	17	18	19	20	21	22
3	3	2	1	0						
4	4	3	2	1	0					
5		4	3	2	1	0				
K 6			4	3	2	1	0			
7				4	3	2	1	0		
8					4	3	2	1	0	
9						4	3	2	1	0


$$D=13+K-X$$



X	8	9	10	11	12	13	14	15	16	17
3	3	2	1	0						
4	4	3	2	1	0					
5		4	3	2	1	0				
K 6			4	3	2	1	0			
7				4	3	2	1	0		
8					4	3	2	1	0	
9						4	3	2	1	0

$$D=8+K-X$$


Gap Z



V	20	22	24	26	28	30	32	34
3	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0
K 6	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0
9	0	0	1.6	1.7	1.8	2.0	2.1	2.3

Door clearance at R=1mm




For further explanation → see page 2.12



V	20	22	24	26	28	30	32	34
3	0.6	0.9	1.3	1.7	2.2	4.0	5.9	7.8
4	0.6	0.9	1.2	1.7	2.2	3.4	5.2	7.1
5	0.6	0.9	1.2	1.6	2.1	2.9	4.6	6.5
K 6	0.6	0.9	1.2	1.5	2.1	2.6	4.1	5.9
7	0.6	0.9	1.2	1.5	2.1	2.6	3.6	5.3
8	0.6	0.8	1.2	1.5	2.0	2.5	3.2	4.8
9	0.6	0.8	1.2	1.5	2.0	2.5	3.1	4.4

T-type 95 Thick Door Hinge

For wood doors





- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 95°
35mm
12mm
3Way snap-on



Technical details

Cranking

9mm




150 Pcs

Made of steel

Cranking

17mm



150 Pcs

Made of steel


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

TouchControl solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




	Interaxis 45mm	Interaxis 48mm
Cup type	Item number	Item number
	707-0ZK0-054	707-0ZL0-054
	707-0ZK1-054	707-0ZL1-054
	707-0ZK4-054	707-0ZL4-054

Drilling patterns for hinge cups → see page 2.15

	707-0WK0-054	707-0WL0-054
	707-0WK1-054	707-0WL1-054
	707-0WK4-054	707-0WL4-054


Drilling patterns for hinge cups → see page 2.15

Door adjustment

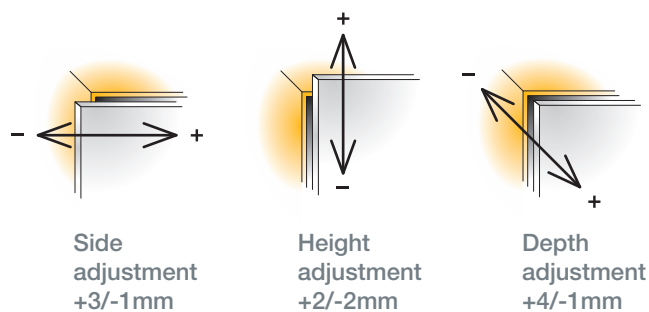


For further explanation → see pages 2.20-2.22

Mounting details

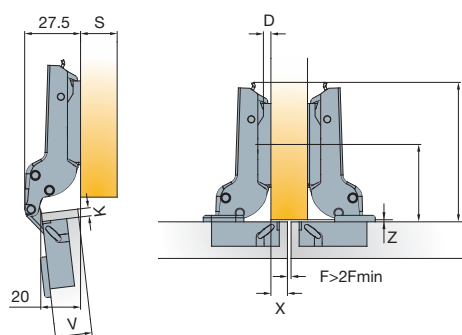

Drawings show application on D=0mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table


For further explanation → see page 2.11

X	4	5	6	7	8	9	10	11	12	13
3	3	2	1	0						
4	4	3	2	1	0					
5		4	3	2	1	0				
K 6			4	3	2	1	0			
7				4	3	2	1	0		
8					4	3	2	1	0	
9						4	3	2	1	0
										D

$$D=4+K-X$$

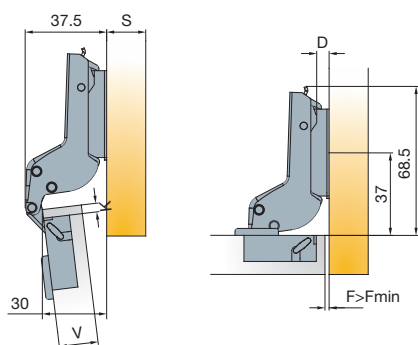

Drawings show application on D=2mm mounting plate




V	20	22	24	26	28	30	32
3	0	0	1	1	2	3	4*
4	1	1	2	2	3	4	4*
K 5	2	2	3	3	4	4	4*
6	3	3	4	4	4*	4*	
7	4	4	4*	4*	4*	4*	
							D

$$D=-4+K+F$$

*Hinge adjustment needed


Gap Z



V	20	22	24	26	28	30	32	34
3	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0
K 6	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0
9	0	0	1.6	1.7	1.8	2.0	2.1	2.3
								Z _{MIN}

Door clearance at R=1mm



For further explanation → see page 2.12



V	20	22	24	26	28	30	32	34
3	0.6	0.9	1.3	1.7	2.2	4.0	5.9	7.8
4	0.6	0.9	1.2	1.7	2.2	3.4	5.2	7.1
5	0.6	0.9	1.2	1.6	2.1	2.9	4.6	6.5
K 6	0.6	0.9	1.2	1.5	2.1	2.6	4.1	5.9
7	0.6	0.9	1.2	1.5	2.1	2.6	3.6	5.3
8	0.6	0.8	1.2	1.5	2.0	2.5	3.2	4.8
9	0.6	0.8	1.2	1.5	2.0	2.5	3.1	4.4
								F _{MIN}

T-type 110 Unsprung Hinge

For wood doors

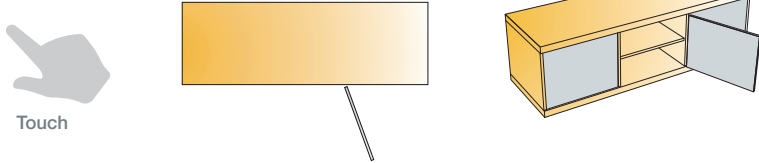

- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
12mm
3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	704-0593-054	704-0672-054
EasyFix		704-0553-054

Cranking

0mm





150 Pcs

Made of steel

Cranking

5mm



150 Pcs

Made of steel

Drilling patterns for hinge cups → see page 2.15		
Screw-on	704-0661-054	704-0673-054
EasyFix		704-0604-054
Drilling patterns for hinge cups → see page 2.15		


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171



TouchControl solutions
→ see pages 2.193-2.204




- Concealed hinge without spring to be used with PushOpen mechanisms with magnet

→ see pages 2.207-2.210





Touch

Door adjustment

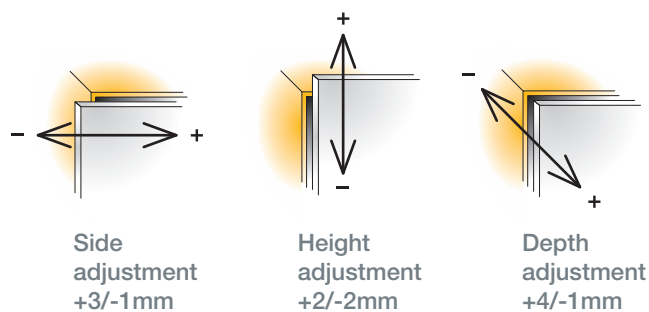


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance






Mounting plate thickness table

For further explanation → see page 2.11

X	13	14	15	16	17	18	19
3	3	2	1	0			
4	4	3	2	1	0		
K							
5		4	3	2	1	0	
6			4	3	2	1	0
							D

$$D = 13 + K - X$$




X	8	9	10	11	12	13	14
---	---	---	----	----	----	----	----

3	3	2	1	0			
4	4	3	2	1	0		
K							
5		4	3	2	1	0	
6			4	3	2	1	0
							D

$$D = 8 + K - X$$

Door clearance at R=1mm

For further explanation → see page 2.12






V	16	17	18	19	20	21	22	23	24	25	26
3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
K											
5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9
											F _{MIN}

Gap Z_{MIN}=0

T-type 110 Unsprung Hinge

For wood doors





- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	704-0595-054	704-0674-054
EasyFix		704-0697-054

Cranking
9mm



Drilling patterns for hinge cups → see page 2.15

150 Pcs Made of steel


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171



TouchControl solutions
see pages 2.193-2.204




· Concealed hinge without spring to be used with PushOpen mechanisms with magnet

→ see pages 2.207-2.210



Touch

Door adjustment


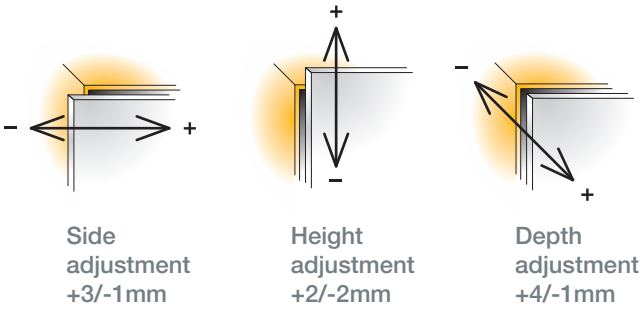


For further explanation → see pages 2.20-2.22

Mounting details

Mounting plate drilling distance


Mounting plate thickness table
For further explanation → see page 2.11

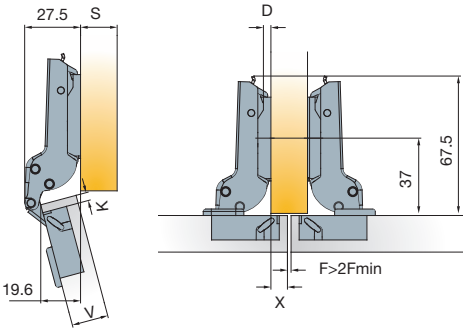

X	4	5	6	7	8	9	10
K	3	3	2	1	0		
	4	4	3	2	1	0	
	5		4	3	2	1	0
	6			4	3	2	1

D=4+K-X

Door clearance at R=1mm
For further explanation → see page 2.12






V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9
												F _{MIN}

Gap Z_{MIN}=0

T-type 170

For wood doors



- Opening angle 165°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
	702-0EK0-054	702-0EL0-054
	702-0EK1-054	702-0EL1-054
	702-0EK4-054	702-0EL4-054

Drilling patterns for hinge cups → see page 2.15

Cranking

0mm

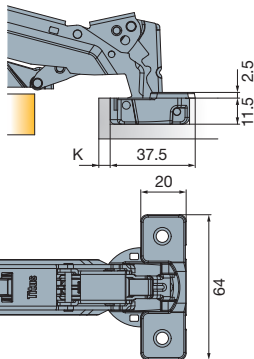

50 Pcs

Made of steel and zinc


Mounting plates
→ see pages 2.79-2.84



Cover caps for hinge arm
see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050

10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl solutions
see pages 2.193-2.204



Soft closing systems
→ see page 2.185




Door adjustment

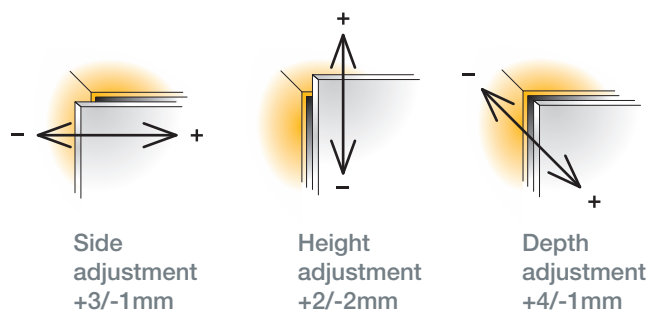


For further explanation → see pages 2.20-2.22

Mounting details

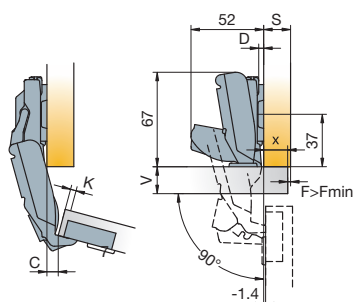

Drawings show application on D=0mm mounting plate
No door protrusion in 90° position

Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11

X	13	14	15	16	17	18	19	20
3	3	2	1	0				
4	4	3	2	1	0			
5		4	3	2	1	0		
6			4	3	2	1	0	
7				4	3	2	1	0


$$D=13+K-X$$

C value with D=0 mounting plates

K	3	4	5	6	7
C	-9.0	-8.1	-7.1	-6.1	-5.2

Door clearance at R=1mm

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1

Gap $Z_{MIN}=0.5$

T-type 170

For wood doors



- Opening angle 165°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number

Cranking

5mm

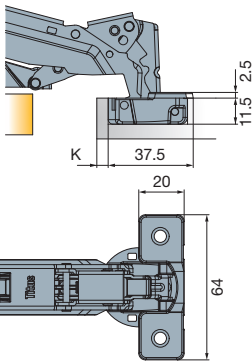

	702-0FK0-054	702-0FL0-054
	702-0FK1-054	702-0FL1-054
	702-0FK4-054	702-0FL4-054



Drilling patterns for hinge cups → see page 2.15

50 Pcs

Made of steel and zinc

Cranking

9mm

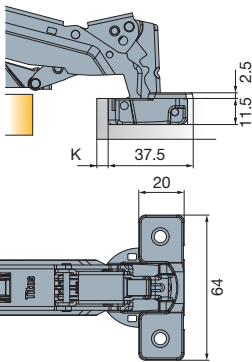

	702-0GK0-054	702-0GL0-054
	702-0GK1-054	702-0GL1-054
	702-0GK4-054	702-0GL4-054

Drilling patterns for hinge cups → see page 2.15

50 Pcs

Made of steel and zinc


Mounting plates
see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050
10000 Pcs

Hinge angle restrictor
see page 2.171




TouchControl solutions
→ see pages 2.193-2.204




Soft closing systems
→ see page 2.185



Zero protrusion
with D=0 mounting plate



Door adjustment

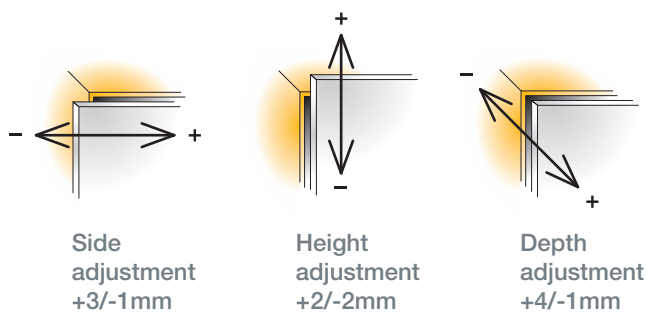


For further explanation → see pages 2.20-2.22


Mounting
details

Mounting plate
drilling distance

Mounting plate thickness table
For further explanation → see page 2.11

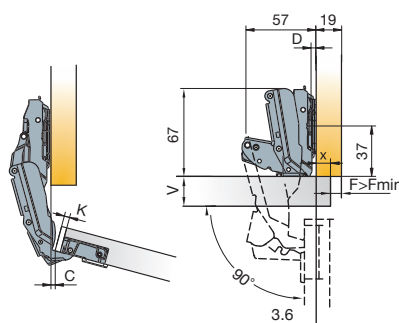


Drawings show application on
D=0mm mounting plate




X	8	9	10	11	12	13	14
3	3	2	1	0			
4	4	3	2	1	0		
5		4	3	2	1	0	
6			4	3	2	1	0

$$D=8+K-X$$

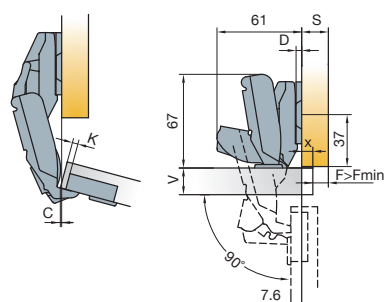

Drawings show application on
D=0mm mounting plate




Drawing show application on
D=0mm mounting plate

X	1	2	3	4	5	6	7	8	9	10	11
3	6			3	2	1	0				
4		6			3	2	1	0			
5			6			3	2	1	0		
6				6			3	2	1	0	
7					6			3	2	1	0

$$D=4+K-X$$

Door clearance at R=1mm
For further explanation → see page 2.12




V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1

Gap $Z_{MIN}=0.5$

T-type

for Pie-cut Corner Cabinet

For wood doors



- Opening angle 70°/25°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on






Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	721-0PK0-650	721-0PL0-650
EasyFix	721-0PK4-650	721-0PL4-650
PressTo	721-0PK6-650	

Drilling patterns for hinge cups → see page 2.15

Corner cabinet



50 Pcs

Cup made of zinc, arm made of steel


Mounting plates
see pages 2.79-2.84



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6328-050


10000 Pcs

TouchControl solutions
→ see pages 2.193-2.204




· Use in pair with 170° hinge

Door adjustment

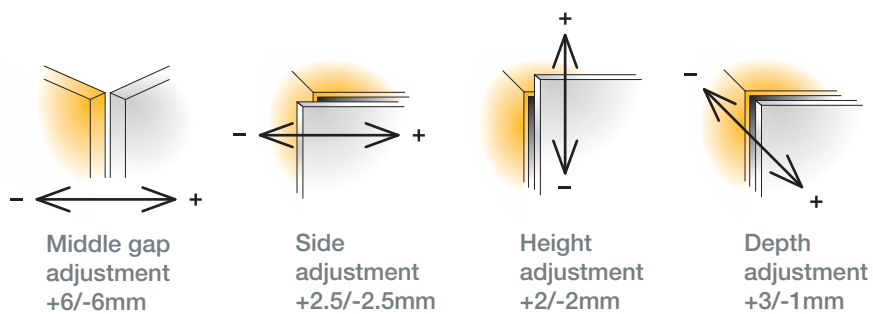


For further explanation → see pages 2.20-2.22

Mounting details

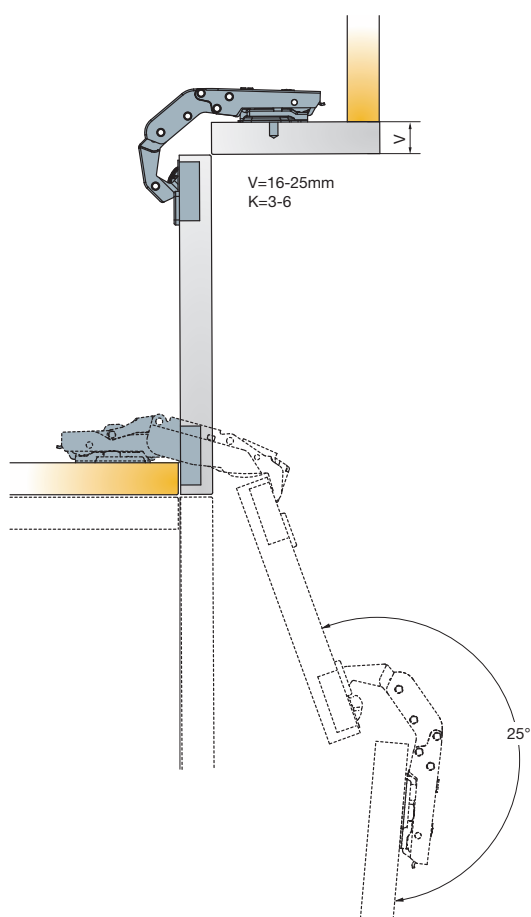


Mounting plate drilling distance




Any T-type mounting plate can be used

Adjustments




The adjustment of the gap between two doors is done by rotating the adjustment screw as shown on the drawing

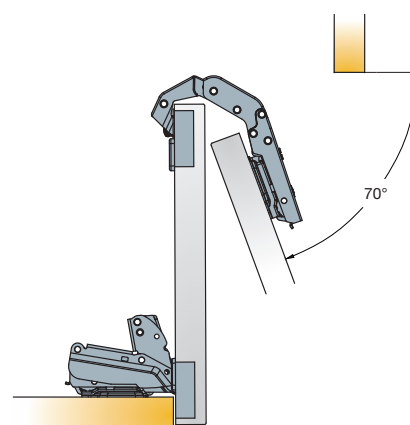

Drawings show application on D=2mm mounting plate

T-type



Mounting Plates

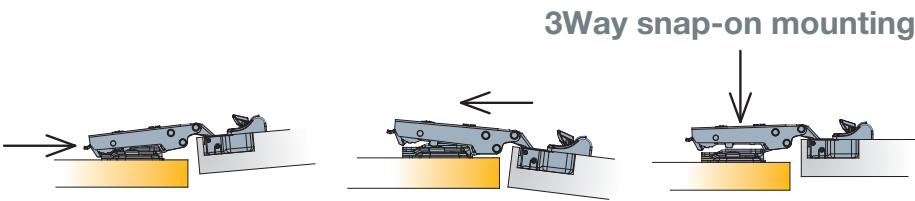

Cam adjustable cruciform mounting plate 37mm



Drilling pattern

Dimensions




 150 Pcs Made of steel


Cam adjustable linear mounting plate




 150 Pcs Made of steel and zinc







Mounting plate thickness

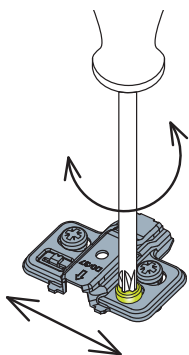

Height adjustment +2/-2mm

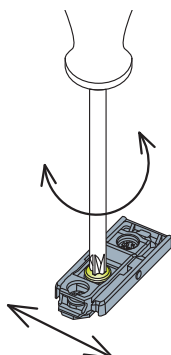

Height adjustment +2/-2mm

Mounting plate type	 15	 10.5	 10.5	 15	
Mounting plate thickness (D)	 Item number	 Item number	 Item number	 Item number	
0mm	700-0KC0-054	700-0KB0-054	700-0KF0-054	700-0KA0-054	
1mm	700-0KC1-054	700-0KB1-054	700-0KF1-054	700-0KA1-054	
2mm	700-0KC2-054	700-0KB2-054	700-0KF2-054	700-0KA2-054	
3mm	700-0KC3-054	700-0KB3-054	700-0KF3-054	700-0KA3-054	
4mm	700-0KC4-054	700-0KB4-054	700-0KF4-054	700-0KA4-054	
0mm	700-0LC0-650	700-0LB0-650	700-0LF0-650		
2mm	700-0LC2-650	700-0LB2-650	700-0LF2-650		
3mm	700-0LC3-650	700-0LB3-650	700-0LF3-650		

Legend of mounting plate type symbols



Pre-mounted
15mm euro screws







Machine
insertion ready




Pre-mounted
10.5mm
expanding dowels



Pre-mounted
chipboard screw





T-type Mounting Plates

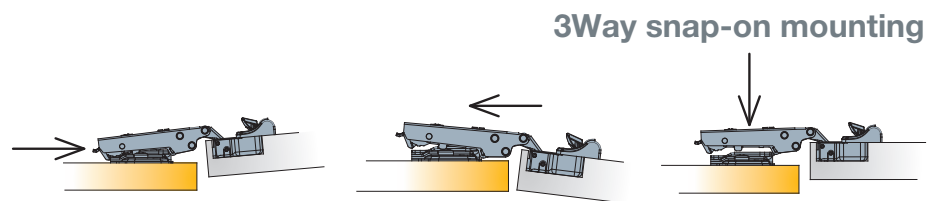

Cruciform mounting plate 37mm

Drilling pattern


Dimensions



150 Pcs

Made of steel

Fixing screw for cruciform mounting plate
If not pre-mounted




Chipboard screws
820-6328-050




10000 Pcs








Mounting plate thickness



Height adjustment +2/-2mm




Height adjustment +2/-2mm

Mounting plate type		 15	 10.5	 10.5	 14.5		
Mounting plate thickness (D)							
Item number							
0mm	700-0NA0-054	700-0NC0-054	700-0NB0-054	700-0NF0-054	700-0NE0-054		
1mm	700-0NA1-054	700-0NC1-054	700-0NB1-054	700-0NF1-054	700-0NE1-054		
2mm	700-0NA2-054	700-0NC2-054	700-0NB2-054	700-0NF2-054	700-0NE2-054		
3mm	700-0NA3-054	700-0NC3-054	700-0NB3-054	700-0NF3-054	700-0NE3-054		
4mm	700-0NA4-054	700-0NC4-054	700-0NB4-054	700-0NF4-054	700-0NE4-054		
9mm	700-0NA9-650	700-0NC9-650		700-0NF9-650			

Legend of mounting plate type symbols




Screw-on ready for chipboard screws
← screws




 15

Pre-mounted 15mm euro screws




 10.5

Machine insertion ready




 10.5

Pre-mounted 10.5mm expanding dowels



 14.5


Pre-mounted chipboard screw



T-type

Mounting Plates for Face Frame Cabinets



3Way snap-on mounting

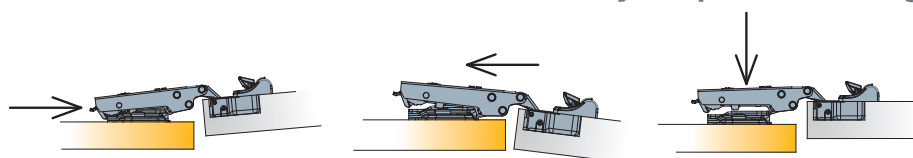

Cam adjustable
face frame mounting plate

Drilling pattern



Dimensions



150 Pcs

Made of steel and zinc


Cam adjustable
face frame mounting plate inset mounting



150 Pcs

Made of steel and zinc


Fixing screw for cruciform mounting plate
If not pre-mounted








Chipboard screws
820-6328-050




10000 Pcs

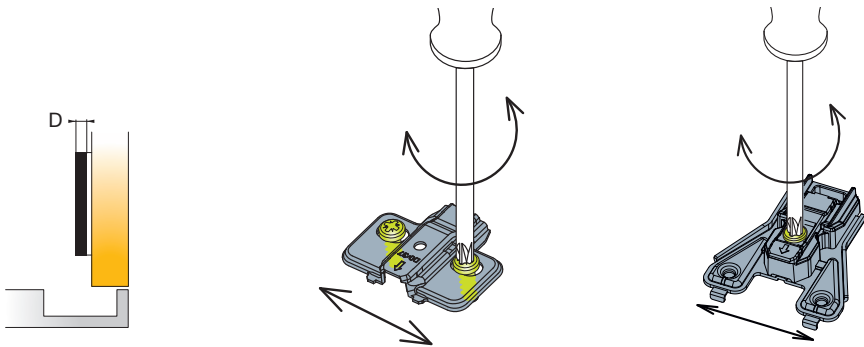


Mounting plate thickness Height adjustment +2/-2mm Height adjustment +2/-2mm

Mounting plate type		 15	 10.5	 10.5	 14.5		
Mounting plate thickness (D)							
Item number							
0mm						700-0KW0-650	
3mm						700-0KW3-650	
6mm						700-0KW6-650	
inset	700-0KWN-054						

Legend of mounting plate type symbols

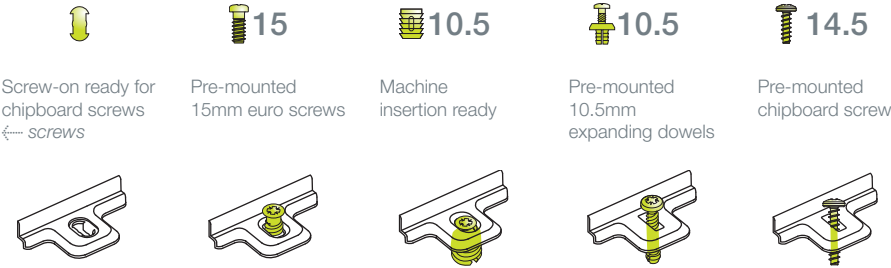


S-type Hinges




Snap-on mounting system

- Easy and quick assembly and disassembly
- Flexibility for the furniture user
- Tight hinge-to-plate joint improves hinge stability and reduces door sag




Easily accesible height adjustment with cam

- Intuitive and quick height adjustment
- Consumer friendly




ConfidentClose

- 1 Fast closing
- 2 Late start of deceleration action
- 3 Quiet landing with SoftTouch

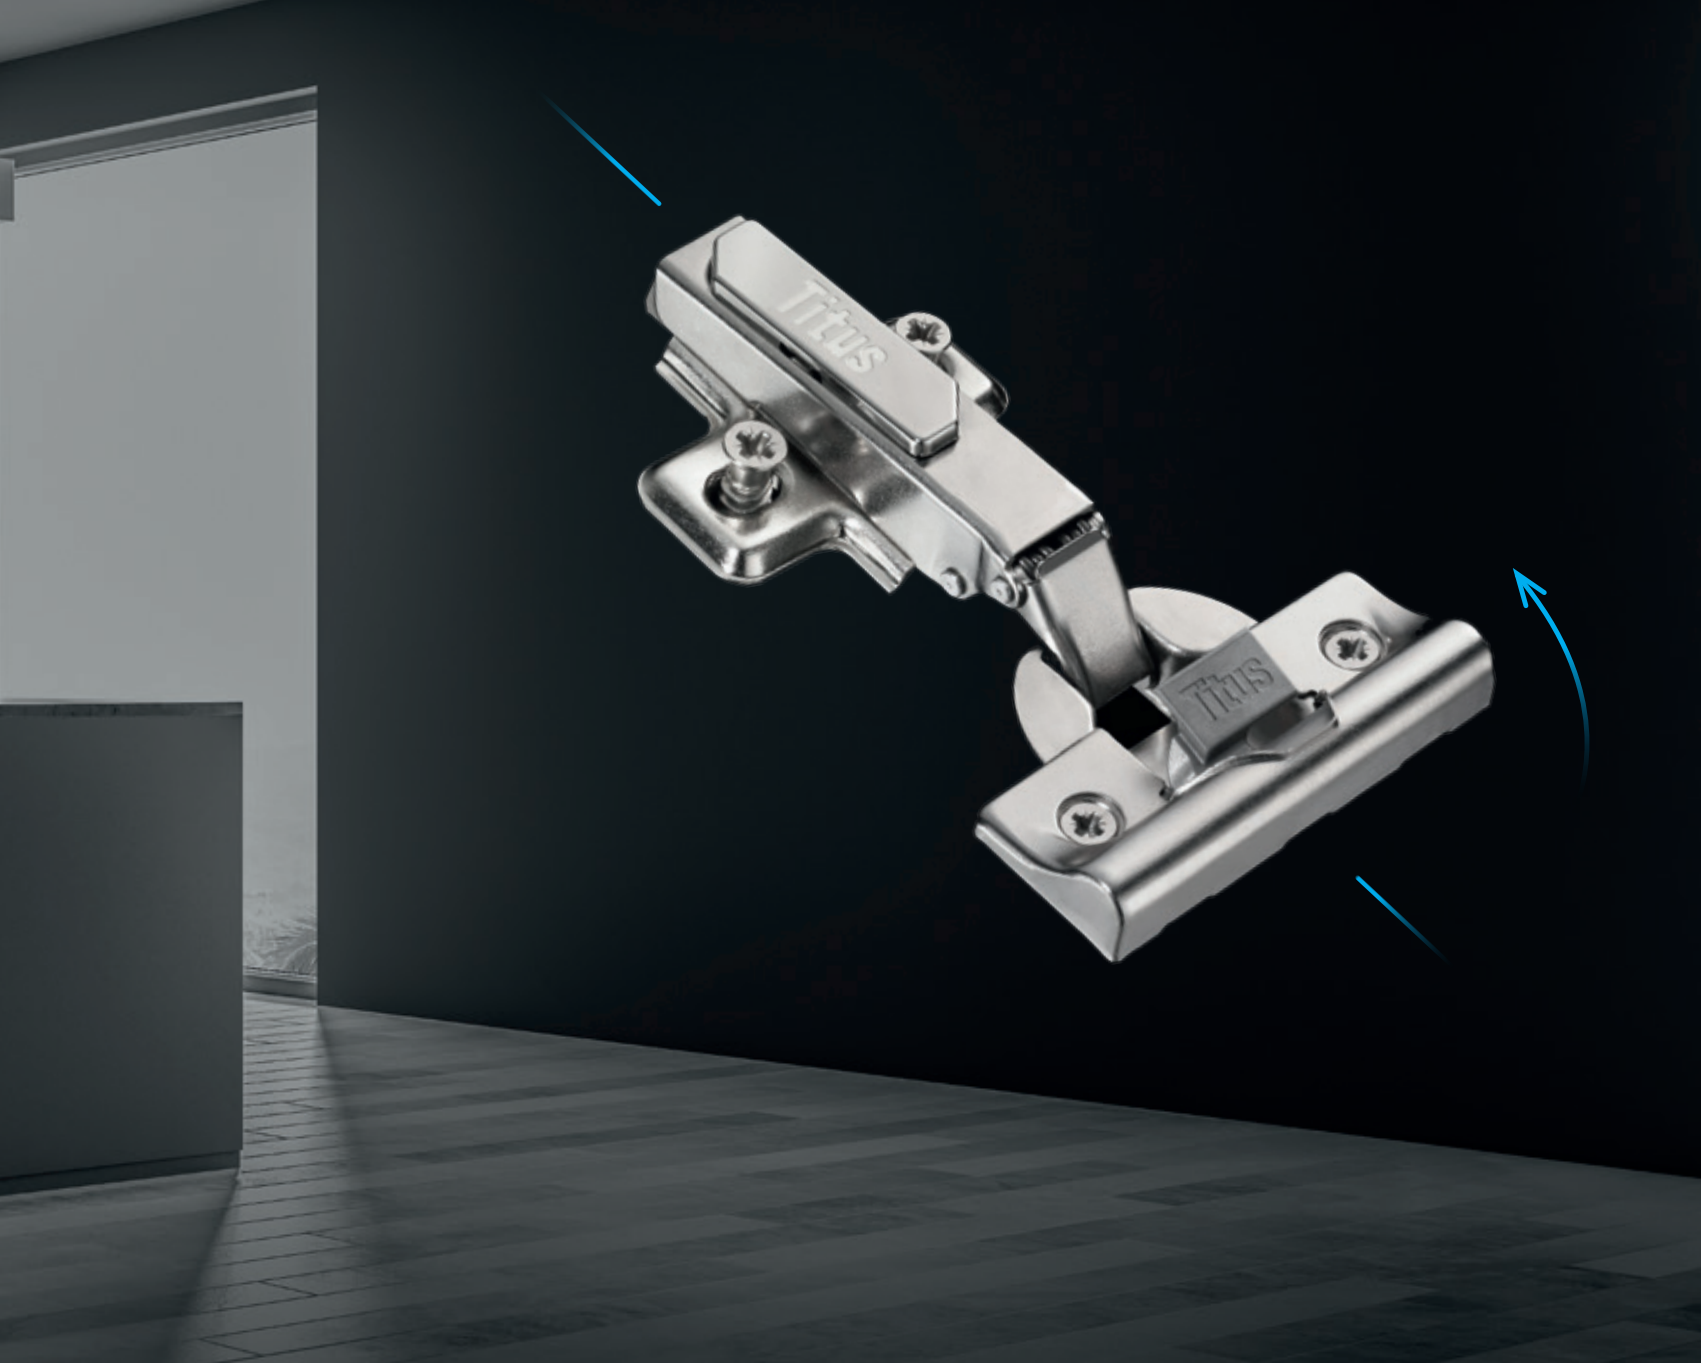


Titus Damper Inside

- Titus proprietary multi-purpose damping technology
- Reliable and consistent life-long damping



Soft closing options

- Integrated
- Glissando add-on
- Stand-alone






Touch opening

- Guarantees effortless opening
- Elegant cabinet design
- Doors without handles

S-type-i3 110

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
min. 11mm
snap-on




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number


Cranking

0mm



200 Pcs

Made of steel and plastic




	242-0970-054	242-0971-054
--	--------------	--------------

Drilling patterns for hinge cups → see page 2.15


Cranking

9mm



200 Pcs

Made of steel and plastic




	242-0976-054	242-0977-054
--	--------------	--------------

Drilling patterns for hinge cups → see page 2.15


Cranking

15mm



200 Pcs

Made of steel and plastic



	242-0997-054	242-0998-054
--	--------------	--------------

Drilling patterns for hinge cups → see page 2.15

Mounting plates

→ see pages 2.123-2.128




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

If not pre-mounted



820-6308-050

10000 Pcs

Hinge angle restrictor

→ see page 2.171




TouchControl solutions

→ see pages 2.193-2.204





Door adjustment

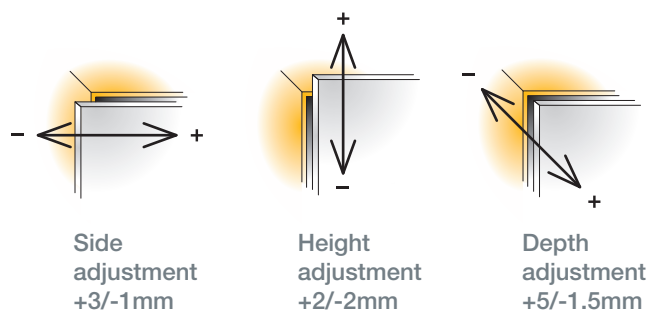


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance





Mounting plate thickness table


For further explanation → see page 2.11

X	13	14	15	16	17	18	
3	3	2	1	0			
K	4	3	2	1	0		
5			3	2	1	0	D

$$D=13+K-X$$





Drawings show application on
D=0mm mounting plate




X	4	5	6	7	8	9	
3	3	2	1	0			
K	4	3	2	1	0		
5			3	2	1	0	D

$$D=4+K-X$$



Drawings show application on
D=3mm mounting plate




V	16	17	18	19	20	21	
3	2	2	2	3	3	3	
K	4	3	3	3			
5	3						D

$$D=-2+K+F$$

Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22	
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5	
K	4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0	F _{MIN}

Gap Z_{MIN}=0

S-type-i3 110/15°

For wood doors





- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system



110°
35mm
min. 11mm
snap-on



Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
		
	Item number	Item number
 Screw-on	242-0W71-650	242-0W72-650

Cranking
9mm



Drilling patterns for hinge cups → see page 2.15

 200 Pcs

Made of steel and plastic


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050
 10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204



Door adjustment


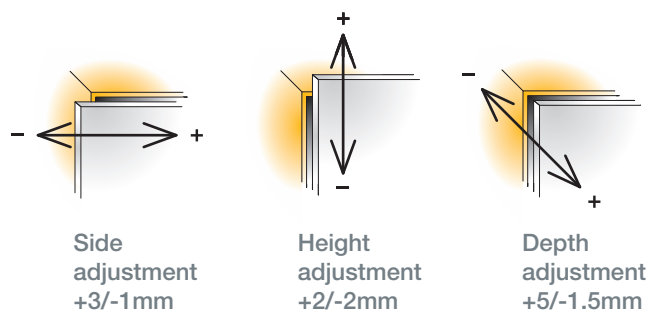


For further explanation → see pages 2.20-2.22

Mounting details

Mounting plate drilling distance

Mounting plate thickness table For further explanation → see page 2.11



X	4	5	6	7	8	9
3	3	2	1	0		
K 4		3	2	1	0	
5			3	2	1	0
D						

$$D=4+K-X$$

Drawings show application on
D=0 and K=4mm mounting plate

Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap $Z_{MIN}=0$

S-type-i3 110/24°

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
min. 11mm
snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number

Cranking

9mm



Screw-on	242-0W48-650	
----------	--------------	--

Drilling patterns for hinge cups → see page 2.15

200 Pcs

Made of steel and plastic


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050
 10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204




Door adjustment

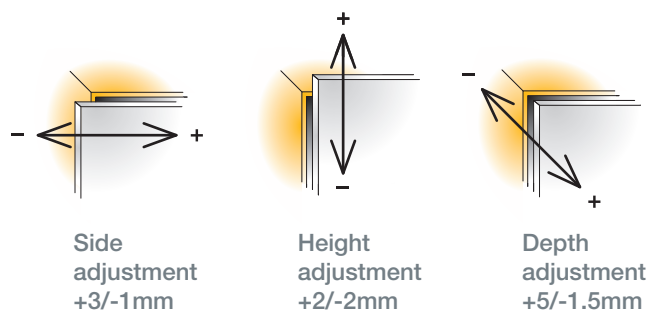


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11

X	3	4	5	9	10	11	12	13	14
3	9			3	2	1	0		
K 4		9			3	2	1	0	
5			9			3	2	1	0
									D

Drawings show application on
D=0mm mounting plate

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap Z_{MIN}=0

S-type-i3 110/30°

30° angled application for wood doors



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
min. 11mm
snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	242-0885-650	242-0886-650

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm



100 Pcs

Cup made of steel and plastic, arm made of zinc

Mounting plates

→ see pages 2.123-2.128




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

If not pre-mounted



820-6308-050



10000 Pcs

Hinge angle restrictor

→ see page 2.171




TouchControl Solutions

→ see pages 2.193-2.204




Door adjustment

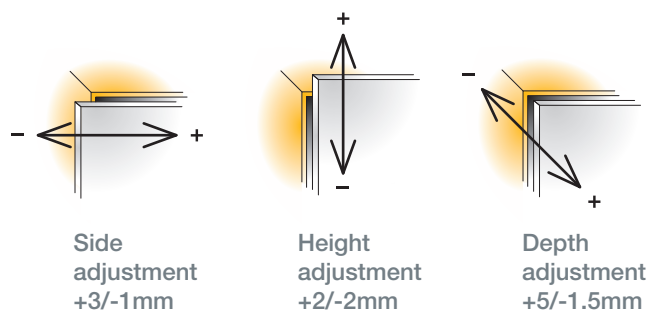


For further explanation → see pages 2.20-2.22

Mounting details

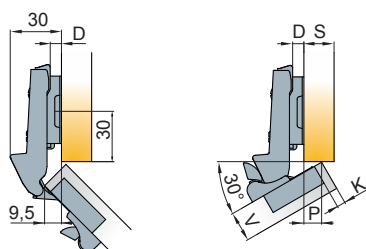

Mounting plate drilling distance



Mounting plate thickness table


For further explanation → see page 2.11

P	2.5	3.5	4.5	8.5	9.5	10.5	11.5	12.5	13.5
3	9			3	2	1	0		
K 4		9			3	2	1	0	
5			9			3	2	1	0

Drawings show application on
D=3mm mounting plate

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap Z_{MIN}=0

S-type-i3 110/45°

45° angled application for wood doors

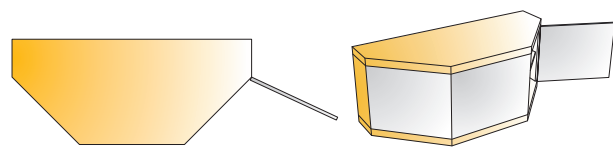



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
min. 11mm
snap-on



Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number

Cranking
9mm





	242-0P81-650	242-0824-650
--	--------------	--------------

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel and plastic, arm made of zinc

Cranking
18mm



	242-0G76-650	242-0H17-650
--	--------------	--------------

Drilling patterns for hinge cups → see page 2.15

100 Pcs

Cup made of steel and plastic, arm made of zinc


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050
10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204



Door adjustment

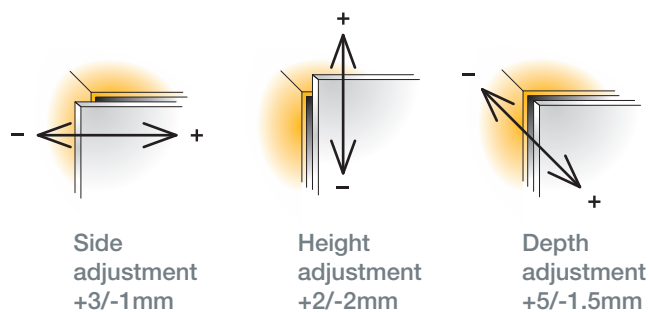


For further explanation → see pages 2.20-2.22

Mounting details

Mounting plate drilling distance


Mounting plate thickness table For further explanation → see page 2.11

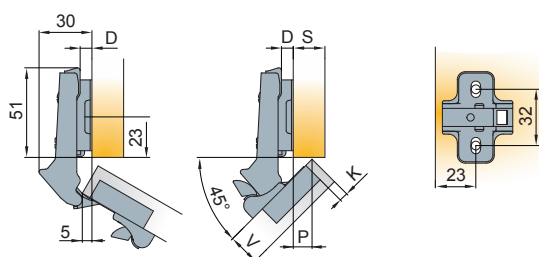

P	9	9.5	10	10.5	11	11.5	12	12.5	13.5
3	3		2		1		0		
K 4		3		2		1		0	
5				3		2		1	0 D

Drawing show application on
D=3mm mounting plate

K	3	4	5
	0	1	2 D

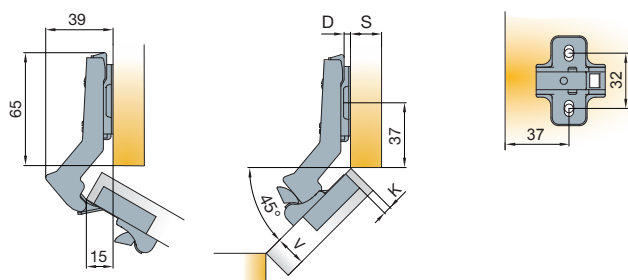


Drawing shows application on
D=18mm mounting plate

Drawing shows application on
D=0mm mounting plate

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0 F _{MIN}

Gap Z_{MIN}=0

S-type-i3 110/90°

For wood door cabinets with blind panels



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
min. 11mm
snap-on




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	242-0Y45-650	242-0Y46-650

Drilling patterns for hinge cups → see page 2.15

Cranking
18mm



100 Pcs

Cup made of steel and plastic, arm made of zinc


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050




Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204




Door adjustment

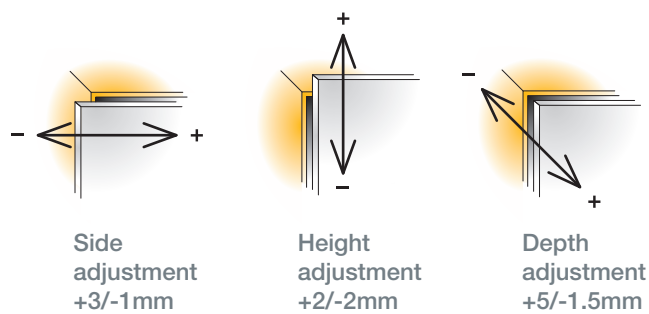



For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0mm mounting plate


Mounting plate drilling distance



Drawing shows application on D=3mm
mounting plate
Door aligned with blind panel

Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

F_{MIN}

Gap Z_{MIN}=0

S-type 110

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system


110°
35mm
11.5mm
snap-on



Technical details


Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number

Cranking
0mm




200 Pcs

Made of steel




	248-0535-050	248-0532-050
	248-0171-050	248-0172-050
	248-0186-050	248-0188-050
Drilling patterns for hinge cups → see page 2.15		

Cranking
9mm




200 Pcs

Made of steel




	248-0536-050	248-0533-050
	248-0279-050	248-0327-050
	248-0482-050	248-0545-050
Drilling patterns for hinge cups → see page 2.15		

Cranking
15mm



200 Pcs

Made of steel



	248-0537-050	248-0534-050
	248-0280-050	248-0328-050
	248-0487-050	248-0547-050
Drilling patterns for hinge cups → see page 2.15		

Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted

820-6308-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

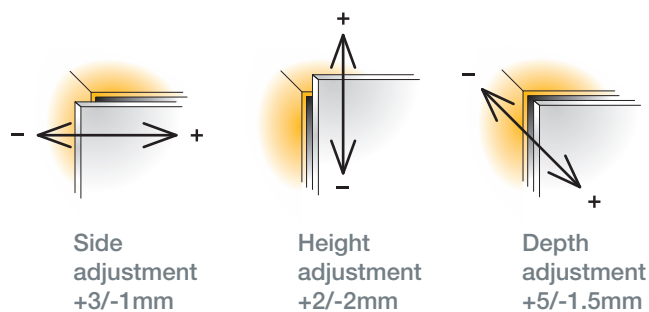


For further explanation → see pages 2.20-2.22

Mounting details

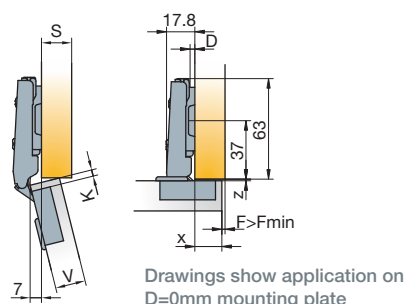

Mounting plate drilling distance





Mounting plate thickness table

For further explanation → see page 2.11



X	13	14	15	16	17	18
3	3	2	1	0		
K	4	3	2	1	0	
5			3	2	1	0

D=13+K-X

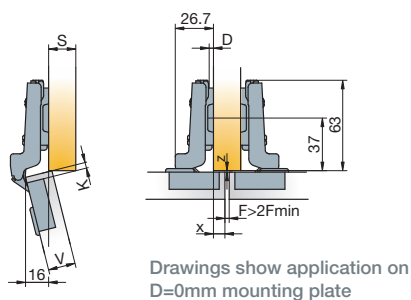

X	4	5	6	7	8	9
3	3	2	1	0		
K	4	3	2	1	0	
5			3	2	1	0

D=4+K-X

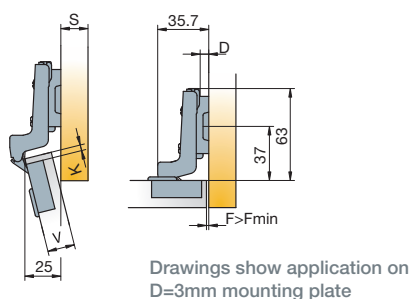


V	16	17	18	19	20	21
3	2	2	2	3	3	3
K	4	3	3			
5	3					

D=-2+K-F

Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K	4	0.3	0.5	0.7	0.9	1.2	1.6
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

F_{MIN}

Gap Z_{MIN}=0

S-type 110/-15°

-15° angled application for wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
11.5mm
snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	248-0V14-050	248-0V39-050
Machine insertion	248-0V41-050	248-0V42-050

Drilling patterns for hinge cups → see page 2.15

Cranking

0mm



100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050



10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204




Door adjustment

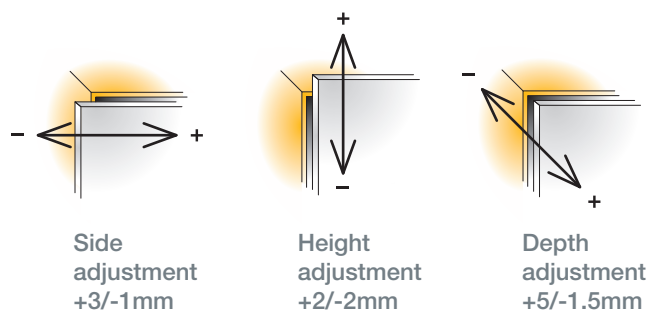


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table

For further explanation → see page 2.11

X	4	5	6	10	11	12	13	14	15
3	9			3	2	1	0		
K 4		9			3	2	1	0	
5			9			3	2	1	0
									D

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0
							F _{MIN}

Gap Z_{MIN}=0

S-type 110/15°

15° angled application for wood doors

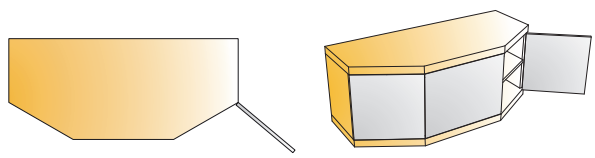

- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
11.5mm
snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	248-0080-050	248-0V62-050

Drilling patterns for hinge cups → see page 2.15

Cranking
9mm



100 Pcs Cup made of steel, arm made of zinc

Mounting plates
→ see pages 2.123-2.128




Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted

820-6308-050
 10000 Pcs



Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

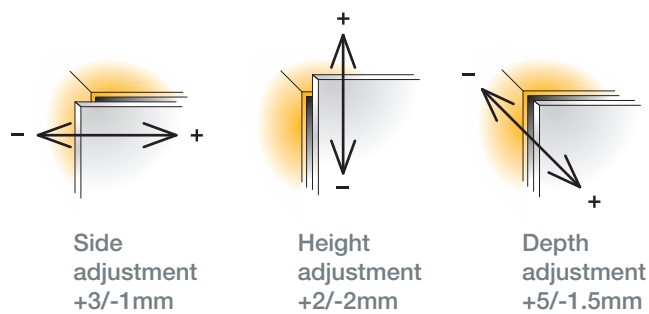


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0 and K=4mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table

For further explanation → see page 2.11

X, P	1	2	3	7	8	9	10	11	12
3	9			3	2	1	0		
K 4		9			3	2	1	0	
5			9			3	2	1	0
									D

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0
							F _{MIN}

Gap Z_{MIN}=0

S-type 110/24°

24° angled application for wood doors



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 11.5mm
- Hinge on plate mounting system snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	248-0V18-050	248-0V45-050
Machine insertion	248-0V47-050	248-0V48-050

Drilling patterns for hinge cups → see page 2.15

Cranking
9mm



100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted
820-6308-050
10000 Pcs



Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

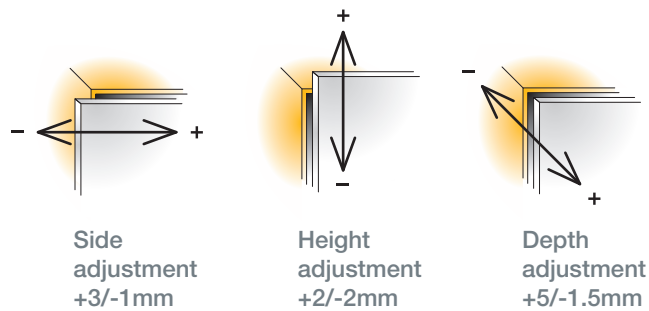


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table

For further explanation → see page 2.11

X	3	4	5	9	10	11	12	13	14
3	9			3	2	1	0		
K 4		9			3	2	1	0	
5			9			3	2	1	0
									D

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap $Z_{MIN}=0$

S-type 110/30°

30° angled application for wood doors

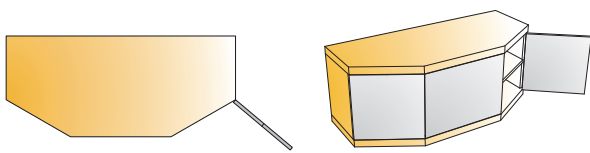

- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 11.5mm
- Hinge on plate mounting system snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	248-0675-050	248-0665-050
Machine insertion	248-0N12-050	248-0N13-050

Drilling patterns for hinge cups → see page 2.15

Cranking 9mm



200 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted
820-6308-050
10000 Pcs



Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

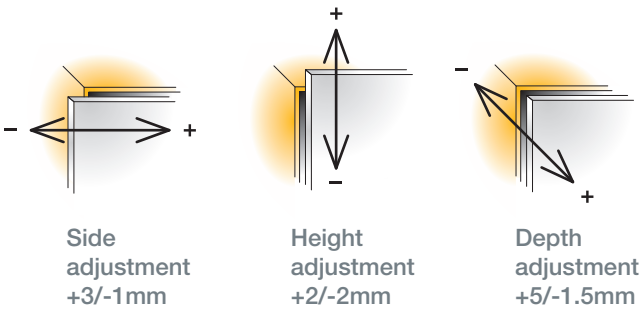


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=3mm mounting plate

Mounting plate
drilling distance



Mounting plate thickness table
For further explanation → see page 2.11

P	2.5	3.5	4.5	8.5	9.5	10.5	11.5	12.5	13.5
3	9			3	2	1	0		
K 4		9			3	2	1	0	
5			9			3	2	1	0
									D

Door clearance
For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0
							F _{MIN}

Gap Z_{MIN}=0

S-type 110/45°

45° angled application for wood doors

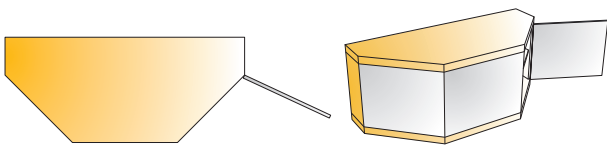

- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
11.5mm
snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	248-0433-050	248-0431-050
Machine insertion	248-0N16-050	248-0N17-050

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm





200 Pcs

Cup made of steel, arm made of zinc

Cranking

18mm



200 Pcs

Cup made of steel, arm made of zinc

Screw-on	248-0285-050	248-0283-050
Machine insertion	248-0N20-050	248-0N21-050

Drilling patterns for hinge cups → see page 2.15

Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted

820-6308-050

10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190



Door adjustment


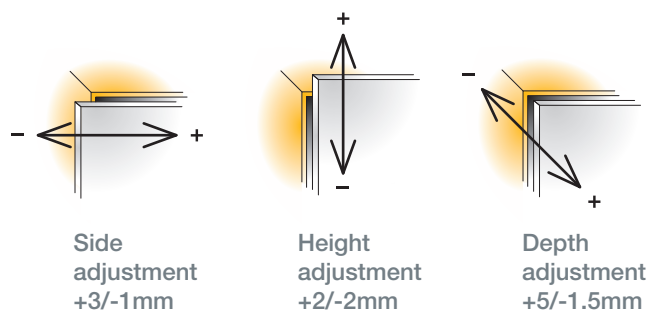


For further explanation → see pages 2.20-2.22

Mounting details

Mounting plate drilling distance




Mounting plate thickness table For further explanation → see page 2.11

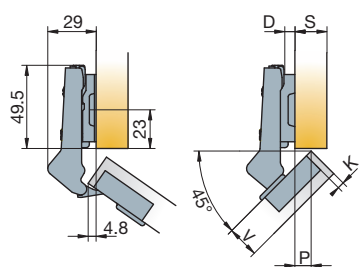

P	9	9.5	10	10.5	11	11.5	12	12.5	13.5
3	3		2		1		0		
K 4		3		2		1		0	
5				3		2		1	0
									D

Drawings show application on
D=3mm mounting plate

K	3	4	5
	0	1	2
			D




Drawings show application on
D=0mm mounting plate

Drawing shows application on
D=0mm mounting plate

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0
							F _{MIN}

Gap Z_{MIN}=0

S-type 110/90°

For wood door cabinets with blind panels



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
11.5mm
snap-on




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	248-0745-050	248-0742-050
Machine insertion	248-0N24-050	248-0N25-050
EasyFix	248-0L61-050	248-0N62-050

Drilling patterns for hinge cups → see page 2.15

Cranking
18mm



100 Pcs Cup made of steel, arm made of zinc

Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted

820-6308-050

10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

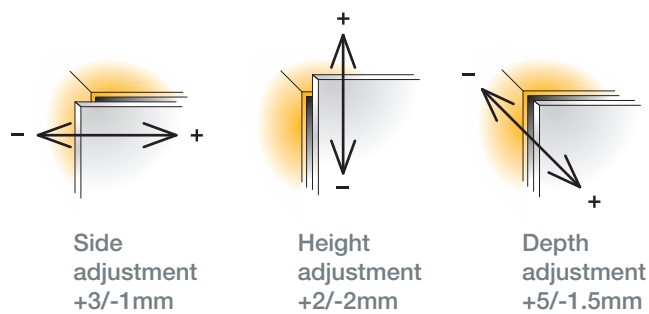


For further explanation → see pages 2.20-2.22

Mounting details


Mounting plate drilling distance

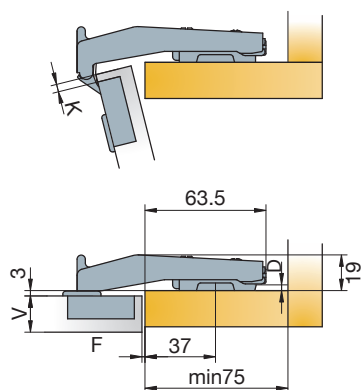

Drawings show application on
D=0mm mounting plate




Drawing shows application on
D=3mm mounting plate
Door aligned with blind panel



Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22	
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5	
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1	
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0	F _{MIN}

Gap Z_{MIN}=0

S-type 110 AL

For aluminium frame doors




- Opening angle
- Hinge on plate mounting system

110°
snap-on



Interaxis
28mm



Cup type

Item
number

Cranking

0mm



200 Pcs

Cup made of zinc, arm made of steel



Screw-on

950-0T27-050

* Screws included

Cranking

9mm



200 Pcs

Cup made of zinc, arm made of steel




Screw-on

950-0T50-050

* Screws included

Cranking

15mm



200 Pcs

Cup made of zinc, arm made of steel



Screw-on

950-0T52-050

* Screws included


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6350-050

10000 Pcs

TouchControl Solutions
→ see pages 2.193-2.204






Concealed Hinges

For further explanation → see pages 2.20-2.22

S-type 110 Unsprung Hinge

For wood doors





- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system


110°
35mm
11.5mm
snap-on



Technical details



	Interaxis 45mm	Interaxis 48mm
		
Cup type	Item number	Item number

Cranking
0mm



200 Pcs
Made of steel

Cranking
9mm



200 Pcs
Made of steel

	248-0AW6-050	248-0AW8-050
Screw-on		

Drilling patterns for hinge cups → see page 2.15

	248-0395-050	248-0AW9-050
Screw-on		

Drilling patterns for hinge cups → see page 2.15


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204




- Hinge without spring
- Effortless opening with just a light touch
- Use with PushOpen mechanisms with magnet

→ see pages 2.197-2.200




Touch

Door adjustment

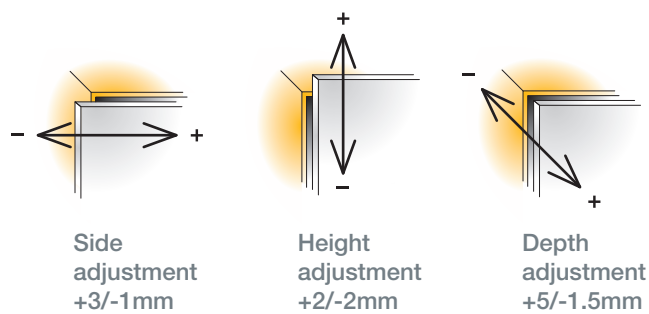


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on D=0mm thick mounting plate

Mounting plate drilling distance




Mounting plate thickness table


For further explanation → see pages 2.13

X	13	14	15	16	17	18
3	3	2	1	0		
K 4		3	2	1	0	
5			3	2	1	0

$$D=13+K-x$$



Drawings show application on D=0mm thick mounting plate




X	4	5	6	7	8	9
3	3	2	1	0		
K 4		3	2	1	0	
5			3	2	1	0

$$D=4+K-x$$

Door clearance at R=1mm

For further explanation → see pages 2.14






V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0


Gap $Z_{MIN}=0$

S-type 170

For wood doors



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 170°
35mm
12mm
snap-on



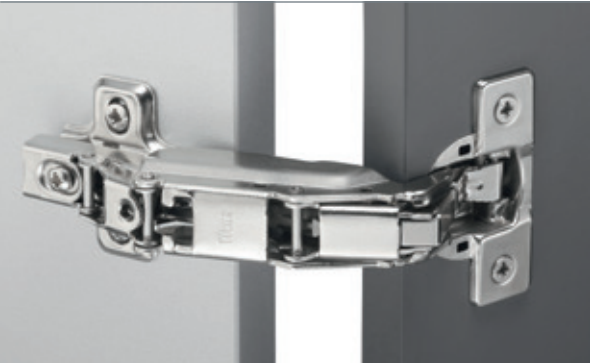


Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
	248-0R14-050	248-0R17-050
	248-0M73-050	248-0R13-050

Drilling patterns for hinge cups → see page 2.15

Cranking
0mm

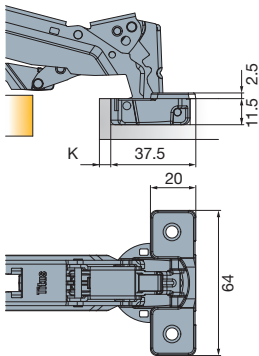

50 Pcs

Made of steel and zinc

Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted

820-6308-050

10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204




Soft closing systems
→ see page 2.185



Zero protrusion
with D=0 mounting plate



Door adjustment


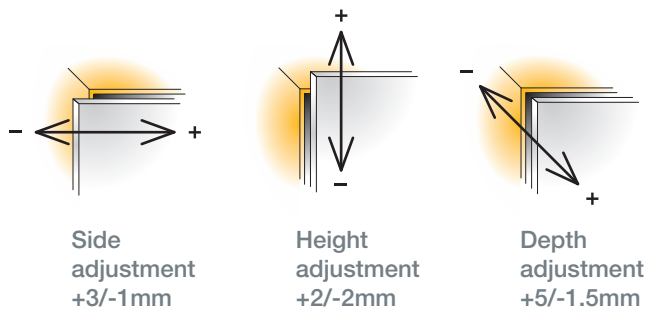


For further explanation → see pages 2.20-2.22

Mounting
details

Mounting plate
drilling distance

Mounting plate thickness table
For further explanation → see page 2.11

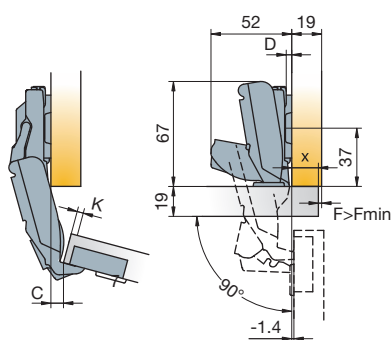

X	10	11	12	13	14	15	16	17	18	19	20
3	6			3	2	1	0				
4		6			3	2	1	0			
K 5			6			3	2	1	0		
6				6			3	2	1	0	
7					6			3	2	1	0
											D

$$D=13+K-X$$


C value with D=0 mounting plates

K	3	4	5	6	7	
	-9.0	-8.1	-7.1	-6.1	-5.2	C

Drawings show application on
D=0mm mounting plate
No protrusion in 90° position

Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K 5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1 F _{MIN}

Gap Z_{MIN}=0.5

S-type 170

For wood doors



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 170°
35mm
12mm
snap-on






Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	248-0162-050	248-0163-050

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm

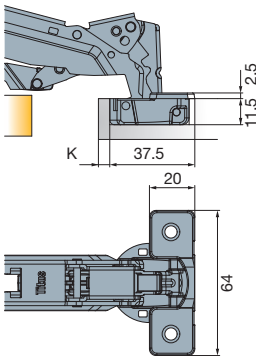

50 Pcs

Made of steel and zinc


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050
 10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see page 2.185





Door adjustment

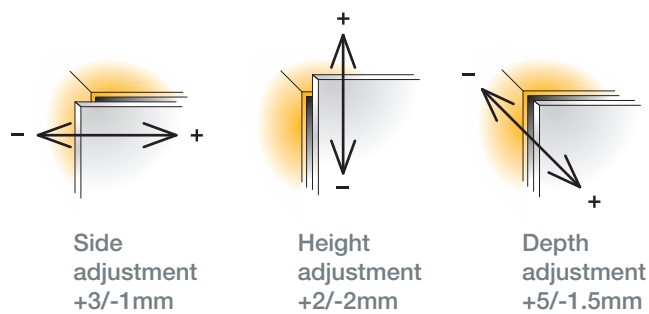


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11


X	1	2	3	4	5	6	7	8	9	10	11
3	6			3	2	1	0				
4		6			3	2	1	0			
K 5			6			3	2	1	0		
6				6			3	2	1	0	
7					6			3	2	1	0

$$D=4+K-X$$


C value with D=0 mounting plates

K	3	4	5	6	7
C	0	0.9	1.9	2.9	3.8


Drawings show application on D=0mm mounting plate



Drawing shows application on D=0mm mounting plate




Drawing shows application on D=9mm mounting plate



Drawing shows application on D=18mm mounting plate

Door clearance

For further explanation → see page 2.12




V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K 5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1

Gap Z_{MIN}=0.5

S-type

for Pie-cut Corner Cabinet

For wood doors



- Opening angle 90°
- Drilling diameter for hinge cup 35mm
- Drilling depth 11.5mm
- Hinge on plate mounting system snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	248-0U21-050	248-0U16-050
Machine insertion	248-0U22-050	248-0V15-050

Drilling patterns for hinge cups → see page 2.15

Corner cabinet



100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.123-2.128



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050




10000 Pcs

TouchControl Solutions
→ see pages 2.193-2.204




· Use in pair with 170° hinge

Door adjustment

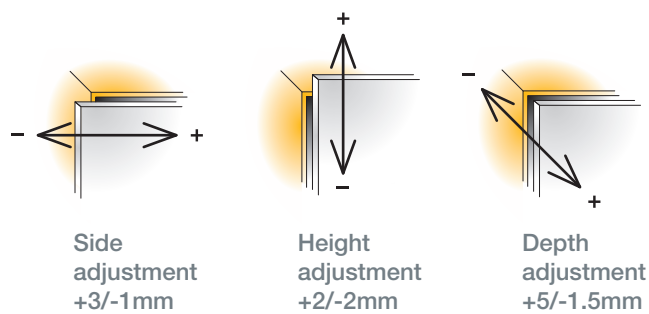


For further explanation → see pages 2.20-2.22


Mounting details

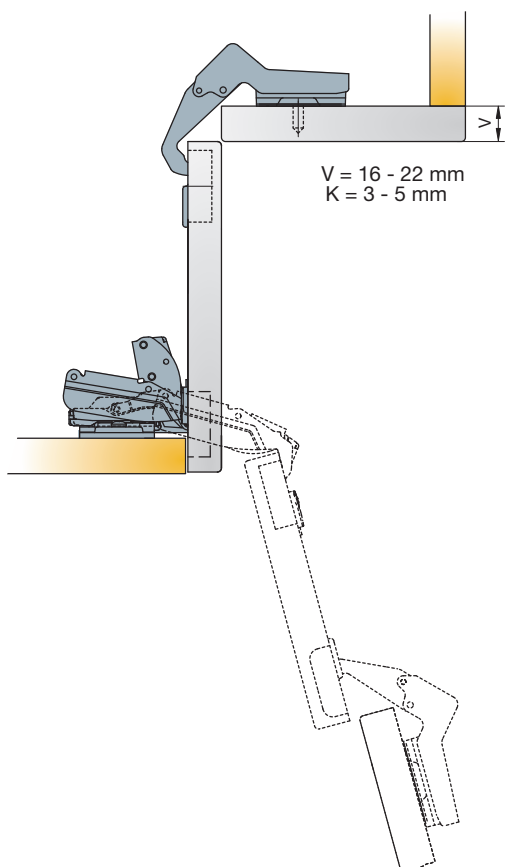

Mounting plate drilling distance





Adjustments

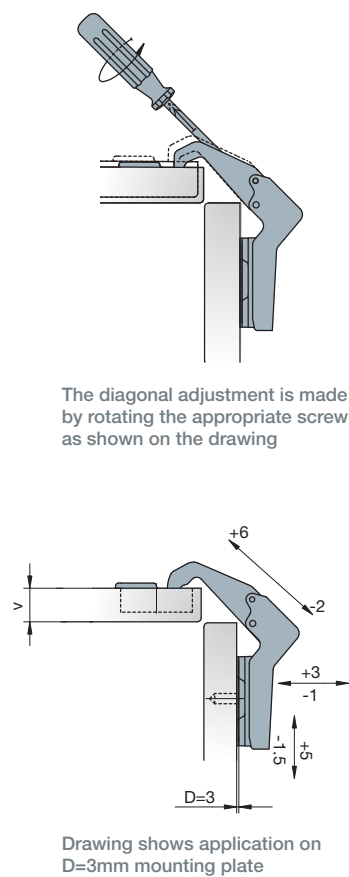

S-type Mounting Plates



S-type snap-on mounting

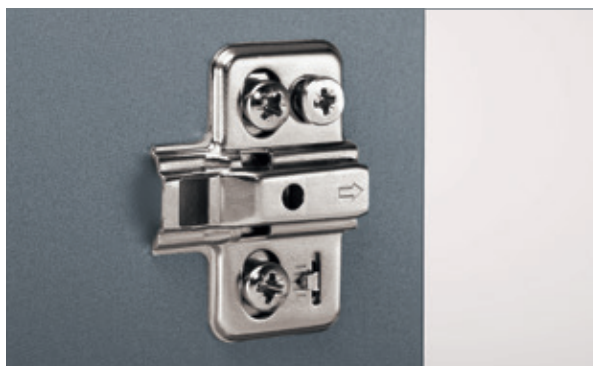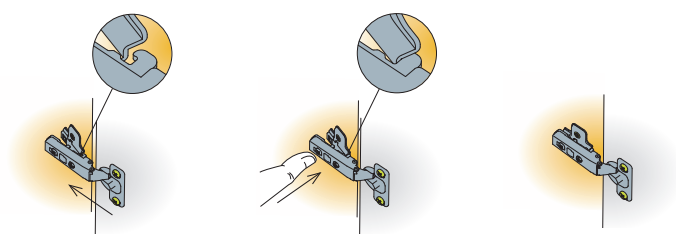

Cam adjustable cruciform
mounting plate 37mm


Drilling pattern

Dimensions



200 Pcs

Made of steel

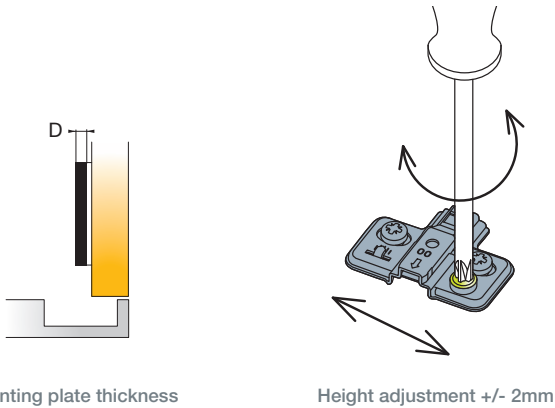

Mounting plate thickness

Height adjustment +/- 2mm

Mounting plate type	13	15	15	10.5	10.5	
Mounting plate thickness (D)						
Item number						
0mm	244-0258-050	244-0261-050	*244-0264-050	*244-0342-050	244-0270-050	
2mm	244-0259-050	244-0262-050	*244-0265-050	*244-0343-050	244-0271-050	
3mm	244-0260-050	244-0263-050	*244-0266-050	*244-0344-050	244-0272-050	

* Available upon special request → see page 0.3

Legend of mounting plate type symbols

13
 Pre-mounted
 13mm euro screws

15
 Pre-mounted
 15mm euro screws



15
 Pre-mounted
 chipboard screws

10.5
 Machine
 insertion ready

10.5
 Pre-mounted
 10.5mm
 expanding dowels

S-type Mounting Plates



S-type snap-on mounting

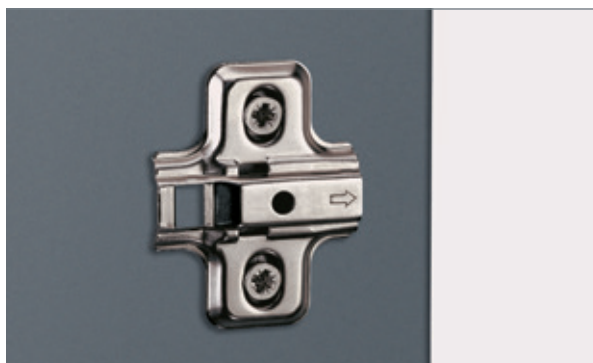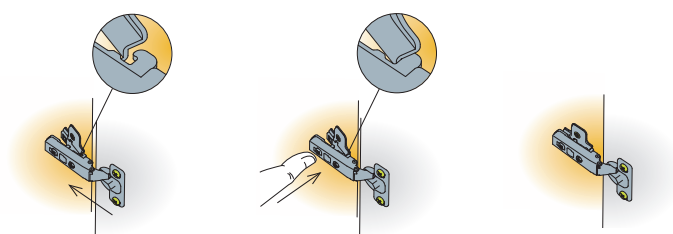

Cruciform mounting plate



Drilling pattern

Dimensions




 200 Pcs Made of steel

Zinc diecast cruciform
mounting plate 37mm




 200 Pcs Made of zinc

Fixing screws for mounting plates
If not pre-mounted




Euro screws
821-6304-050 L=11
821-6323-050 L=13
821-6332-050 L=15

 5000 Pcs











Chipboard screws
820-6328-050

 10000 Pcs





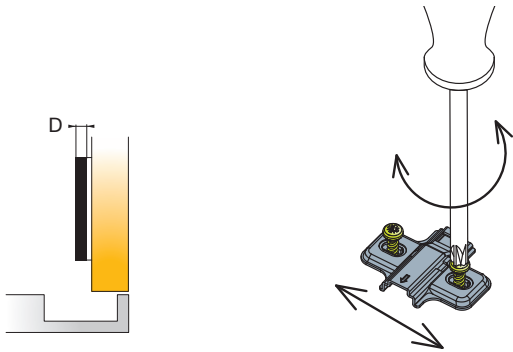


Mounting plate thickness

Height adjustment +/- 2mm

Mounting plate type			 11	 13	 15	 15	 10.5	 10.5
Mounting plate thickness (D)								
Item number								
0mm	244-1136-050	*244-1233-050	244-0Z26-050	244-0134-050	244-0118-050	*244-0136-050	*244-0166-050	244-0P26-050
1mm	244-1137-050	*244-1228-050		244-0561-050		*244-0565-050	*244-0567-050	
2mm	244-1138-050	*244-1229-050	244-0Z63-050	244-0562-050	244-0120-050	*244-0566-050	*244-0568-050	244-0V19-050
3mm	244-1139-050	*244-1234-050		244-0135-050	244-0119-050	*244-0137-050	*244-0167-050	244-0P27-050
6mm	244-1645-050				244-0Z51-050			
* Available upon special request → see page 0.3 Mounting plates with pre-mounted 7.5mm expanding dowels available upon special request → see page 0.3								
9mm	244-3651-650			244-0M33-650	244-0P29-650			
18mm	244-3016-650			244-0085-650	244-0095-650			

Legend of mounting plate type symbols



		 11	 13	 15	 15	 10.5	 10.5
Screw on ready for euro screws ← screws	Screw-on ready for chipboard ← screws	Pre-mounted 11mm euro screws	Pre-mounted 13mm euro screws	Pre-mounted 15mm euro screws	Pre-mounted chipboard screws	Machine insertion ready	Pre-mounted 10.5mm expanding dowels
							

S-type

Face Frame


Mounting Plates

S-type snap-on mounting


	Drilling pattern	Dimensions
Face frame adapter for S-type hinges 		

 200 Pcs Made of zinc alloy


Fixing screw for mounting plates
If not pre-mounted



Chipboard screws
820-6328-050
 10000 Pcs



Mounting plate thickness



Height adjustment +/- 2mm

Mounting plate type		
Mounting plate thickness (D)	 Item number	
0mm	244-3653-650	
3mm	244-3654-650	
6mm	244-3655-650	


Legend of mounting plate type symbols



Screw-on ready for chipboard screws
← screws




B-type Hinges



Slide-on mounting system

- Proven and reliable hinge-to-plate mounting solution
- Cost-per-door effectiveness
- Proven solution for RTA furniture, household application and tall cabinets

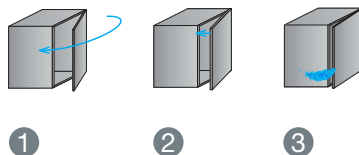



ConfidentClose

- 1 Fast closing
- 2 Late start of deceleration action
- 3 Quiet landing with SoftTouch



Titus Damper Inside

- Titus proprietary multi-purpose damping technology
- Reliable and consistent life-long damping

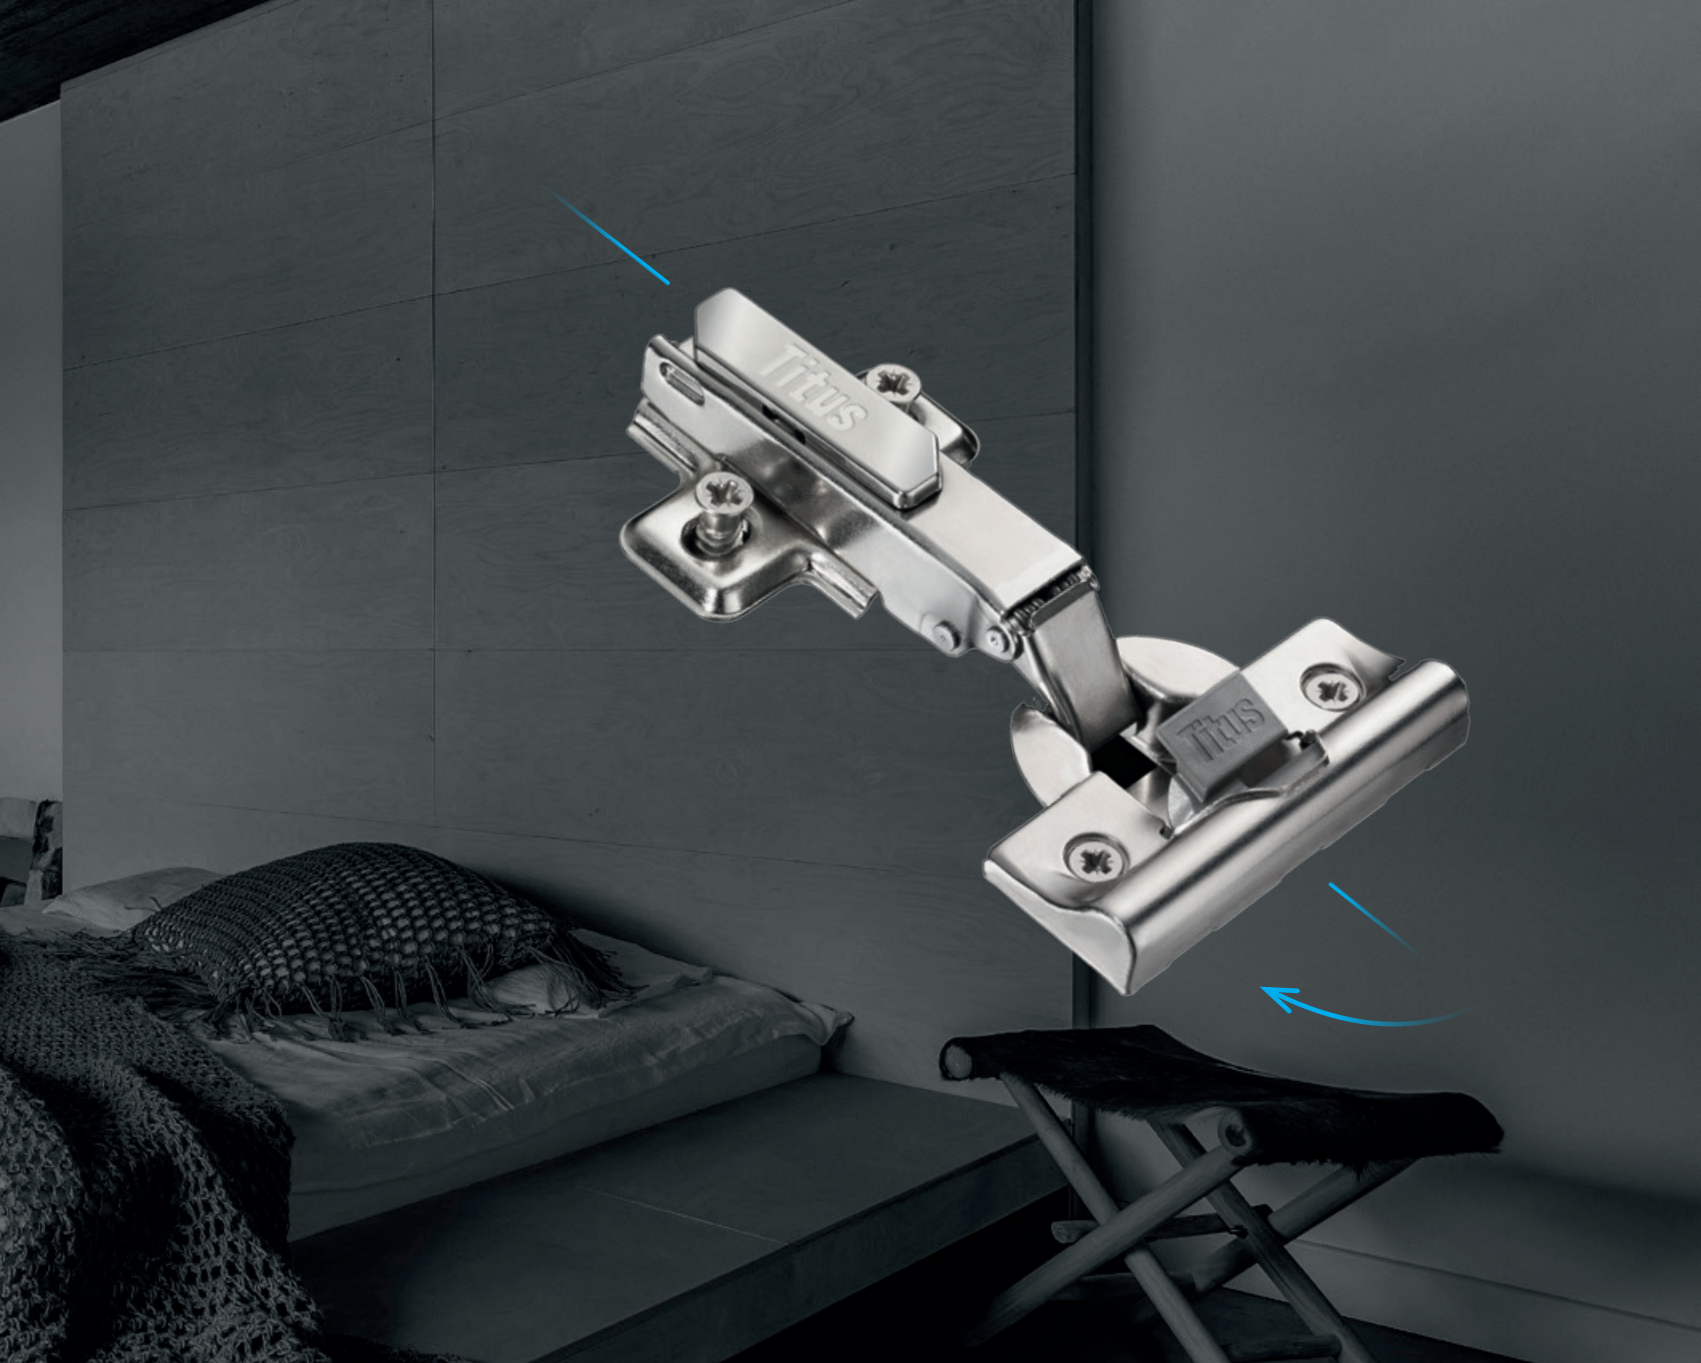


Soft closing options

- Hinge integrated
- Stand-alone
- Add-on with Glissando ready hinge cup
- Fast and simple mounting



B-type-i3

- Reliable open-close
- Consistent performance
- ConfidentClose
- Low 11mm hinge depth cup






Touch opening

- Guarantees effortless opening
- Elegant cabinet design
- Doors without handles

B-type-i3 110

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
min. 11mm
slide-on




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	242-0967-054	242-0968-054

Drilling patterns for hinge cups → see page 2.15

Cranking


0mm



200 Pcs




Made of steel and plastic



Cranking


9mm



200 Pcs



Made of steel and plastic



Screw-on	242-0973-054	242-0974-054
----------	--------------	--------------

Drilling patterns for hinge cups → see page 2.15

Cranking


15mm



200 Pcs



Made of steel and plastic



Screw-on	242-0979-054	242-0980-054
----------	--------------	--------------

Drilling patterns for hinge cups → see page 2.15


Mounting plates
→ see pages 2.163-2.166



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050
10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl solutions
→ see pages 2.193-2.204




Door adjustment

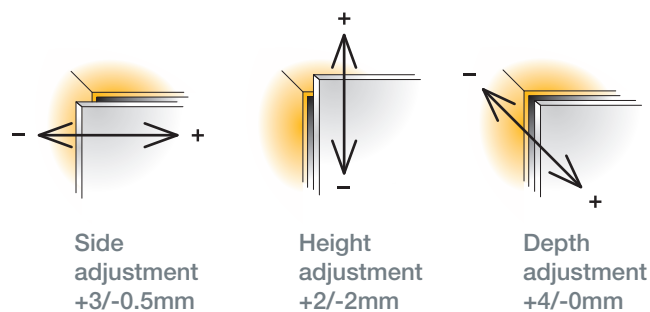


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=0mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table


For further explanation → see page 2.11

X	10	11	12	13	14	15	16	17	18
3	6	5	4	3	2	1	0	0	
K	4	6	5	4	3	2	1	0	0
5			6	5	4	3	2	1	0

$$D=13+K-X$$

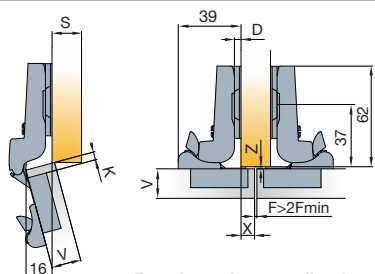


Drawings show application on
D=0mm mounting plate




X	0	1	2	3	4	5	6	7	8	9
3		6	5	4	3	2	1	0		
K	4		6	5	4	3	2	1	0	
5	9			6	5	4	3	2	1	0

$$D=4+K-X$$



Drawings show application on
D=3mm mounting plate




V	16	17	18	19	20	21	22
3	2	2	2	3	3	3	4
K	4	3	3	3	4	4	5
5	4	4	4	5	5	5	6

$$D=-2+K+F$$

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K	4	0.3	0.5	0.7	0.9	1.2	1.6
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap $Z_{MIN}=0$

B-type-i3 110/30°

30° angled application for wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
min. 11mm
slide-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	242-0924-650	242-0H34-650

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm



100 Pcs

Cup made of steel and plastic, arm made of zinc

Mounting plates

→ see pages 2.163-2.166




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

If not pre-mounted



820-6308-050

10000 Pcs

Hinge angle restrictor

→ see page 2.171




TouchControl solutions

→ see pages 2.193-2.204





Door adjustment

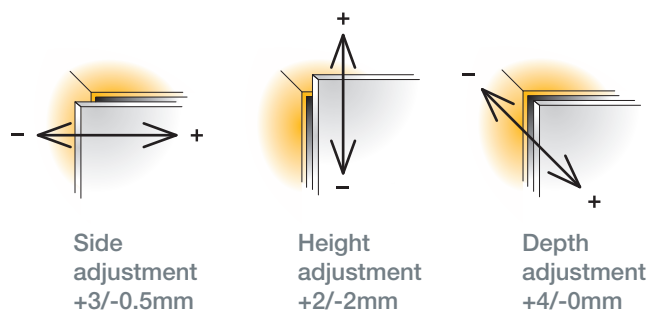


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate
drilling distance



Mounting plate thickness table


For further explanation → see page 2.11

P		2.5	3.5	4.5	8.5	9.5	10.5	11.5	12.5	13.5	
K	3	9			3	2	1	0			
	4		9			3	2	1	0		
	5			9			3	2	1	0	D

Drawings show application on
D=3mm mounting plate

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	
K	3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
	4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
	5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap $Z_{\text{MIN}}=0$

B-type-i3 110/45°

45° angled application for wood doors

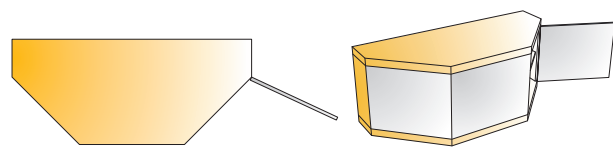



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
min. 11mm
slide-on



Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	 Item number 242-0C27-650	 Item number 242-0D14-650

Cranking
9mm



Drilling patterns for hinge cups → see page 2.15

200 Pcs

Cup made of steel and plastic, arm made of zinc

Mounting plates
→ see pages 2.163-2.166




Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted

820-6308-050
10000 Pcs




Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204



Door adjustment



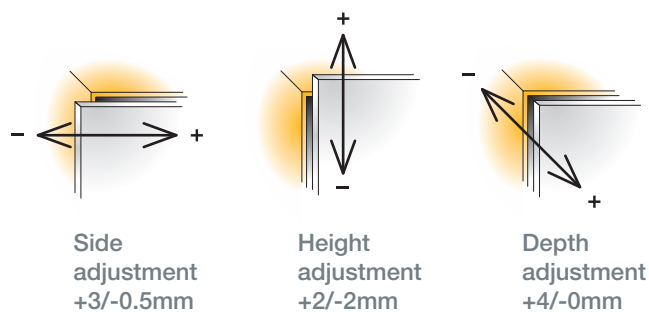


For further explanation → see pages 2.20-2.22

Mounting details

Mounting plate drilling distance

Mounting plate thickness table For further explanation → see page 2.11




P	9	9.5	10	10.5	11	11.5	12	12.5	13.5
3	3		2		1		0		
K 4		3		2		1		0	
5				3		2		1	0
									D

Drawings show application on
D=3mm mounting plate

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5	
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1	
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0	F _{MIN}

Gap Z_{MIN}=0

B-type-i3 110/45°



45° angled application for wood doors

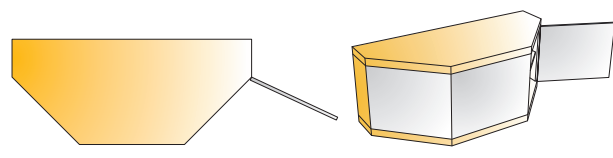

- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
min. 11mm
slide-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
		
	Item number	Item number
 Screw-on	242-0H48-650	242-0H49-650

Drilling patterns for hinge cups → see page 2.15

Cranking
18mm



200 Pcs

Cup made of steel and plastic, arm made of zinc


Mounting plates
→ see pages 2.163-2.166



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted

  820-6308-050

 10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204





Door adjustment

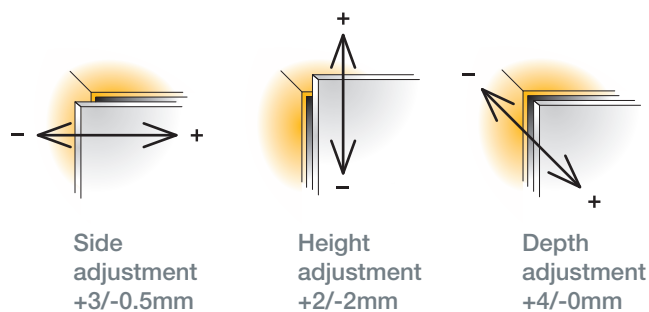


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11

	3	0
K	4	1
	5	2
		D


Drawing shows application on
D=0mm mounting plate

Drawings show application on
D=0mm mounting plate

L=36 for thickness D=0
L=35 for thickness D=1
L=34 for thickness D=2
L=33 for thickness D=3

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K	4	0.3	0.5	0.7	0.9	1.2	1.6
	5	0.3	0.5	0.7	0.9	1.2	1.5
							F _{MIN}

Gap Z_{MIN}=0

B-type-i3 110/90°

For wood door cabinets with blind panels




- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 95°
35mm
min. 11mm
slide-on



Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number

Cranking
18mm



	242-0Y48-650	242-0Y49-650
--	--------------	--------------

Drilling patterns for hinge cups → see page 2.15

200 Pcs

Cup made of steel and plastic, arm made of zinc

Blind panel
mounting
plate




	244-0810-650	
	244-0P28-650	
	244-0C32-650	

This mounting plate can be only used
with B-type-i 110/90° hinges.
Information about mounting plate symbols
→ see page 2.164

200 Pcs

Made of zinc

Hinge cup screws
If not pre-mounted



820-6308-050

10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204






Door adjustment

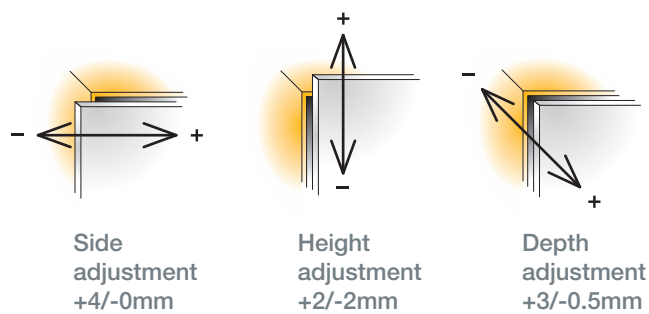

For further explanation → see pages 2.20-2.22


Mounting details

Mounting plate drilling distance



Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

F_{MIN}

Gap Z_{MIN}=0

B-type 110

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
min. 11.5mm
slide-on




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number


Cranking

0mm



200 Pcs

Made of steel




	248-0G54-050	248-0G49-050
	248-0G79-050	248-0K40-050

Drilling patterns for hinge cups → see page 2.15


Cranking

9mm



200 Pcs

Made of steel




	248-0G55-050	248-0G50-050
	248-0G80-050	248-0K76-050

Drilling patterns for hinge cups → see page 2.15


Cranking

15mm



200 Pcs

Made of steel



	248-0G56-050	248-0G51-050
	248-0G81-050	248-0L04-050

Drilling patterns for hinge cups → see page 2.15


Mounting plates
→ see pages 2.163-2.166



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050
10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

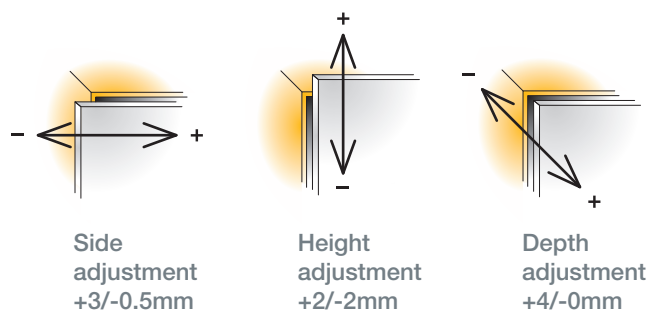


For further explanation → see pages 2.20-2.22

Mounting details

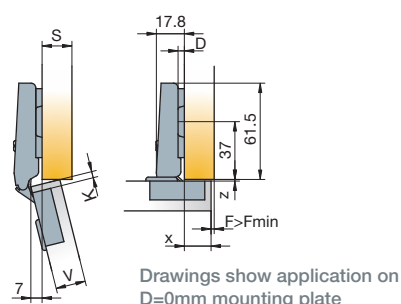

Mounting plate drilling distance





Mounting plate thickness table

For further explanation → see page 2.11



X	10	11	12	13	14	15	16	17	18
3	6	5	4	3	2	1	0	0	
K	4	6	5	4	3	2	1	0	0
5			6	5	4	3	2	1	0

$$D=13+K-X$$

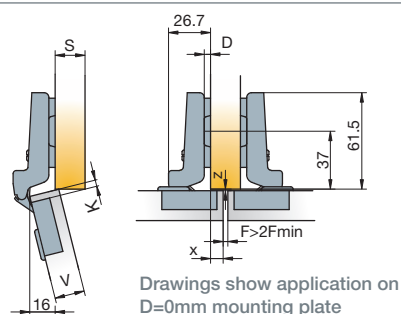

X	0	1	2	3	4	5	6	7	8	9
3		6	5	4	3	2	1	0		
K	4		6	5	4	3	2	1	0	
5	9			6	5	4	3	2	1	0

$$D=4+K-X$$

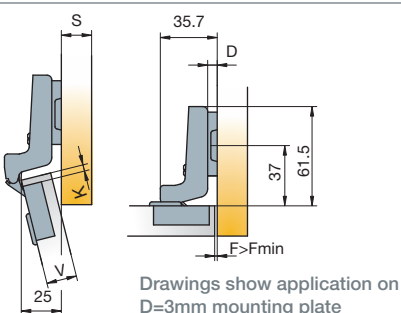


V	16	17	18	19	20	21	22
3	2	2	2	3	3	3	4
K	4	3	3	3	4	4	5
5	4	4	4	5	5	5	6

$$D=-2+K+F$$

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K	4	0.3	0.5	0.7	0.9	1.2	1.6
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap Z_{MIN}=0

B-type 110/30°

30° angled application for wood doors



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 110°
35mm
11.5mm
slide-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	248-0G57-050	248-0G52-050
Machine insertion	248-0G82-050	248-0L72-050

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm



200 Pcs

Cup made of steel, arm made of zinc

Mounting plates

→ see pages 2.163-2.166




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

If not pre-mounted



820-6308-050



10000 Pcs

Hinge angle restrictor

→ see page 2.171



TouchControl Solutions

→ see pages 2.193-2.204




Soft closing systems

→ see pages 2.183-2.190




Door adjustment

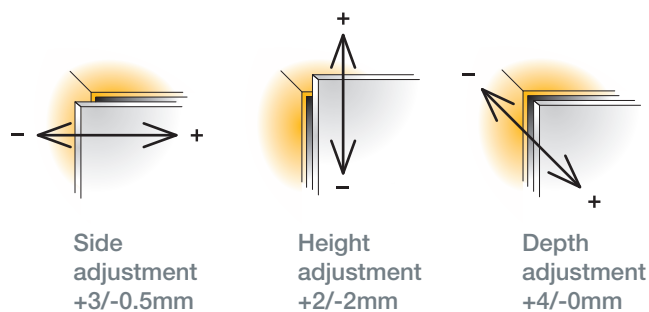


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=3mm mounting plate


Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11

P	2.5	3.5	4.5	8.5	9.5	10.5	11.5	12.5	13.5
3	9			3	2	1	0		
K 4		9			3	2	1	0	
5			9			3	2	1	0



Door clearance



For further explanation → see page 2.12

V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap $Z_{MIN}=0$

B-type 110/45°

45° angled application for wood doors



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 11.5mm
- Hinge on plate mounting system slide-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	 Item number	 Item number
Screw-on	248-0L32-650	248-0L27-650
Machine insertion	248-0N38-050	248-0L71-050

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm



200 Pcs

Cup made of steel, arm made of zinc

Mounting plates

→ see pages 2.163-2.166




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

If not pre-mounted



820-6308-050



10000 Pcs

Hinge angle restrictor

→ see page 2.171



TouchControl Solutions

→ see pages 2.193-2.204




Soft closing systems

→ see pages 2.183-2.190




Door adjustment

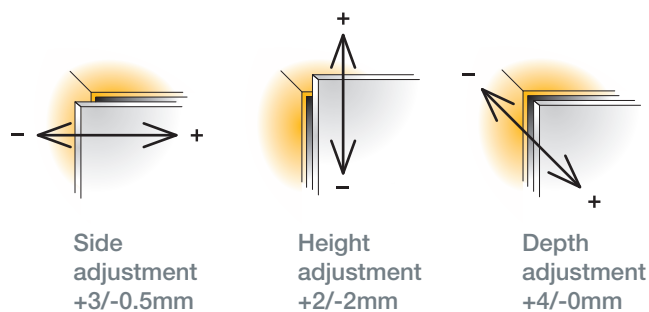


For further explanation → see pages 2.20-2.22

Mounting details



Drawings show application on
D=3mm mounting plate

Mounting plate drilling distance




Mounting plate thickness table

For further explanation → see page 2.11

P	9	9.5	10	10.5	11	11.5	12	12.5	13.5
3	3		2		1		0		
K 4		3		2		1		0	
5				3		2		1	0 D

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5	
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1	
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0	F _{MIN}

Gap Z_{MIN}=0

B-type 110/45°

45° angled application for wood doors

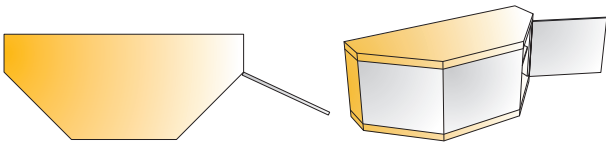

- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 11.5mm
- Hinge on plate mounting system slide-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
	248-0L33-050	248-0L28-050
	248-0L46-050	248-0L70-050

Drilling patterns for hinge cups → see page 2.15

Cranking
18mm



200 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.163-2.166



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050



10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment

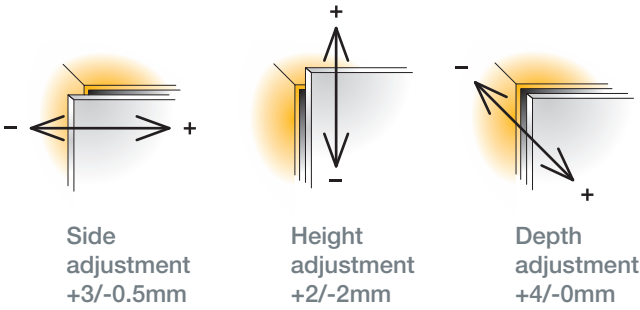


For further explanation → see pages 2.20-2.22


Mounting details



Drawing shows application on D=0mm mounting plate



Mounting plate drilling distance



Mounting plate thickness table
For further explanation → see page 2.11

	3	0	
K	4	1	
	5	2	D

Drawings show application on D=3mm mounting plate

Door clearance
For further explanation → see page 2.12





V	16	17	18	19	20	21	22	
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5	
K	4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
	5	0.3	0.5	0.7	0.9	1.2	1.5	2.0 F _{MIN}

Gap Z_{MIN}=0

B-type 110/90°


For wood door cabinets with blind panels



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 95°
35mm
11.5mm
slide-on



Technical details



Cranking

0mm



200 Pcs

Cup made of steel, arm made of zinc

Cup type	Interaxis 45mm	Interaxis 48mm
Item number		

Screw-on	248-0255-050	248-0V66-050
----------	--------------	--------------

Drilling patterns for hinge cups → see page 2.15

i Opening angle 110°

Cranking

18mm



200 Pcs

Cup made of steel, arm made of zinc

Screw-on	248-0G58-050	248-0G53-050
Machine insertion	248-0G83-050	248-0L73-050

Drilling patterns for hinge cups → see page 2.15

i Opening angle 95°

Blind panel
mounting plate




200 Pcs

Made of zinc

Screw-on	244-0810-650	
11	244-0813-650	
13	244-0C32-650	
15	244-0P28-650	

This mounting plate can be only used with B-type 110/90° hinges.
Information about mounting plate symbols → see page 2.164

Hinge cup screws
If not pre-mounted



820-6308-050

10000 Pcs

Hinge angle restrictor
→ see page 2.171




TouchControl Solutions
→ see pages 2.193-2.204



Soft closing systems
→ see pages 2.183-2.190




Door adjustment





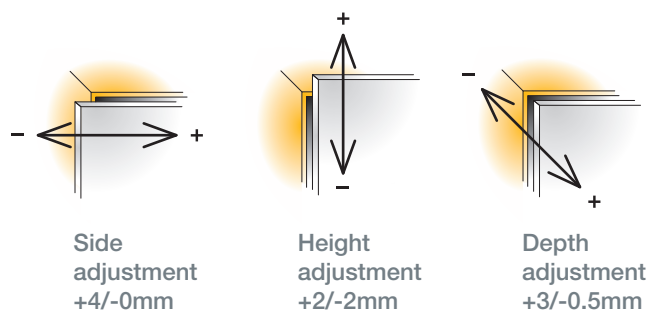


For further explanation → see pages 2.20-2.22

Mounting details

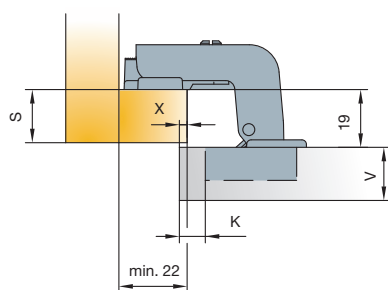


Mounting plate drilling distance

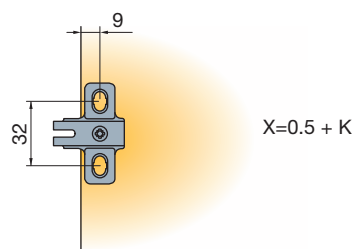

Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22	
K	3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
	4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
	5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

F_{MIN}

Gap Z_{MIN}=0

B-type 110 AL

For aluminium frame doors




- Opening angle
- Drilling depth
- Hinge on plate mounting system

110°
11.5mm
slide-on



Interaxis
28mm



Cup type

Item
number

Cranking
0mm



200 Pcs


Cup made of zinc, arm made of steel



950-0T26-050

* Fixing screws included

Cranking
9mm



200 Pcs


Cup made of zinc, arm made of steel



950-0T49-050

* Fixing screws included

Cranking
15mm



200 Pcs

Cup made of zinc, arm made of steel



950-0T51-050

* Fixing screws included


Mounting plates
→ see pages 2.163-2.166



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
included



820-6350-050

10000 Pcs


Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204




Door adjustment

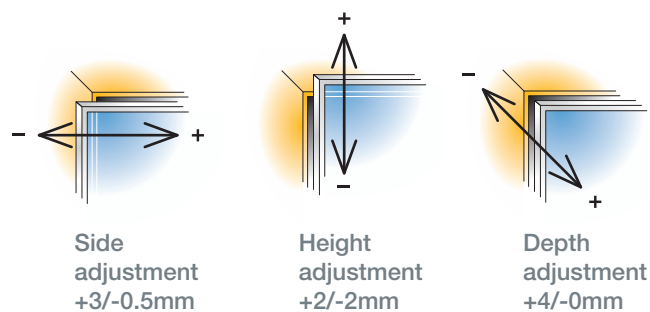


For further explanation → see pages 2.20-2.22

Mounting details



Dimensions shown on m.pl. D=0mm


Mounting plate drilling distance




Mounting plate thickness table

For further explanation → see page 2.11


X	12	13	14	15	16	17	18
17	3	2	1	0			
18	4	3	2	1	0		
19	5	4	3	2	1	0	
20	6	5	4	3	2	1	0

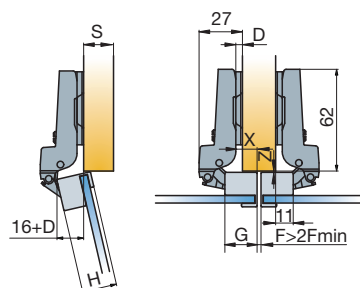


Dimensions shown on m.pl. D=0mm



X	3	4	5	6	7	8	9
17	3	2	1	0			
18	4	3	2	1	0		
19	5	4	3	2	1	0	
20	6	5	4	3	2	1	0




Dimensions shown on m.pl. D=3mm




H	17	18	19	20	21	22
17	1	1	2	2	2	3
18	2	2	3	3	3	3
19	3	3	3	3		
20	2	2				

Drilling pattern for aluminium frame hinges

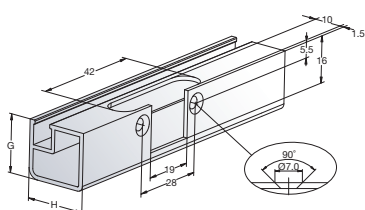


Mounting details



Screws included

Door clearance

For further explanation → see page 2.12






H	17	18	19	20	21	22
17	0.5	0.7	1.1	1.4	1.8	2.9
18	0.5	0.7	1.0	1.3	1.7	2.5
19	0.5	0.7	0.9	1.2	1.6	2.1
20	0.5	0.7	0.9	1.2	1.5	2.0

Gap Z_{MIN}=0.5

B-type 110 AL

For aluminium frame doors
Glissando AL soft closing ready




- Opening angle
- Drilling depth
- Hinge on plate mounting system

110°
11.5mm
slide-on



Interaxis
28mm




Cup type

Item
number

Cranking

0mm



200 Pcs

Made of steel and zinc




Screw-on

950-0464-050

* Fixing screws included

Cranking

9mm



200 Pcs

Made of steel and zinc




Screw-on

950-0465-050

* Fixing screws included

Cranking

15mm



200 Pcs

Made of steel and zinc



Screw-on

950-0466-050

* Fixing screws included

Mounting plates

→ see pages 2.163-2.166




Cover caps for hinge arm

→ see page 2.173



Hinge cup screws

included



820-6350-050

10000 Pcs

Hinge angle restrictor

→ see page 2.171



TouchControl Solutions

→ see pages 2.193-2.204




Soft closing systems

→ see page 2.187





- Hinge for aluminium frame door which can be used with Glissando AL for soft closing solution

Door adjustment

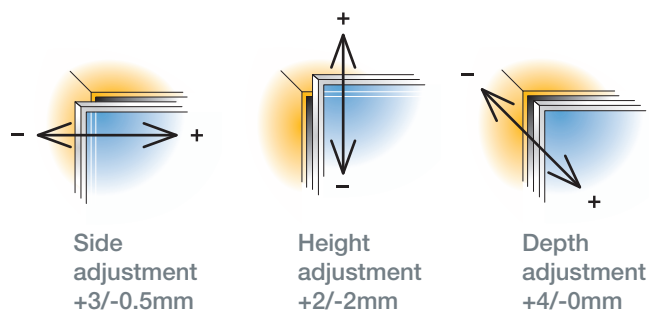


For further explanation → see pages 2.20-2.22

Mounting details



Dimensions shown on m.pl. D=0mm

Mounting plate drilling distance





Mounting plate thickness table


For further explanation → see page 2.11

X	12	13	14	15	16	17	18
G	17	3	2	1	0		
	18	4	3	2	1	0	
	19	5	4	3	2	1	0
	20	6	5	4	3	2	1

D=13+K-X





Dimensions shown on m.pl. D=0mm




X	3	4	5	6	7	8	9
G	17	3	2	1	0		
	18	4	3	2	1	0	
	19	5	4	3	2	1	0
	20	6	5	4	3	2	1

D=4+K-X




Dimensions shown on m.pl. D=3mm




X	17	18	19	20	21	22
G	17	1	1	2	2	3
	18	2	2	3	3	3
	19	3	3	3		
	20	3	3			

D=-2+K+F

Drilling pattern for aluminium frame hinges

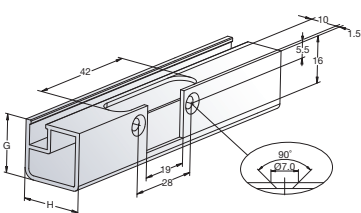


Mounting details



Screws included

Door clearance

For further explanation → see page 2.12






H	17	18	19	20	21	22
G	17	0.5	0.7	1.1	1.4	1.8
	18	0.5	0.7	1.0	1.3	1.7
	19	0.5	0.7	0.9	1.2	1.6
	20	0.5	0.7	0.9	1.2	1.5


Gap Z_{MIN}=0.5

B-type 170

For wood doors



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 170°
35mm
12mm
slide-on



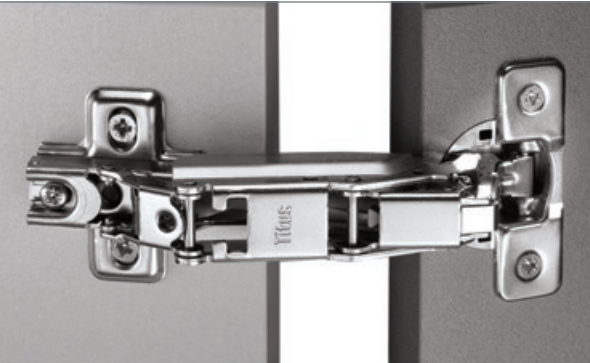


Technical details

	Interaxis 45mm	Interaxis 48mm
Cup type	Item number	Item number
	248-0R10-050	248-0P43-050
	248-0L51-050	248-0R12-050

Drilling patterns for hinge cups → see page 2.15

Cranking
0mm

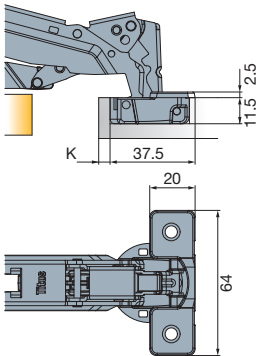

50 Pcs

Made of steel and zinc

Mounting plates
→ see pages 2.163-2.166




Hinge angle restrictor
→ see page 2.171



TouchControl Solutions
→ see pages 2.193-2.204



Hinge cup screws
If not pre-mounted




820-6308-050

10000 Pcs


Soft closing systems
→ see page 2.185



Zero protrusion
with D=0 mounting plate



Door adjustment

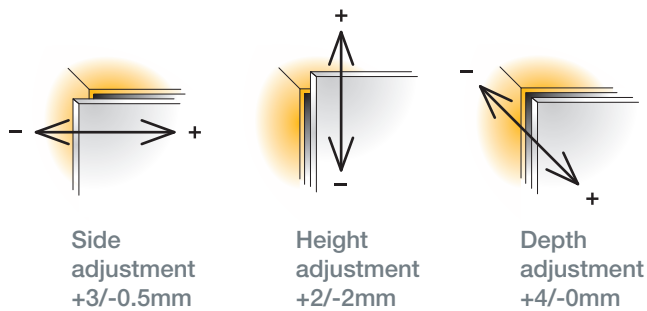


For further explanation → see pages 2.20-2.22


Mounting
details

Mounting plate
drilling distance

Mounting plate thickness table
For further explanation → see page 2.11

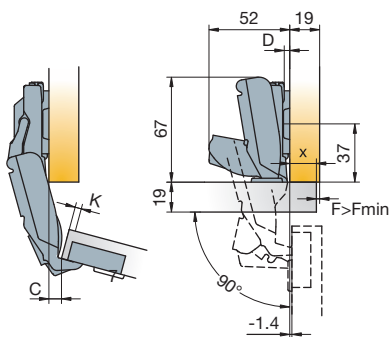

Drawings show application on
D=0mm mounting plate
No door protrusion in 90° position



X	10	11	12	13	14	15	16	17	18	19	20
3	6	5	4	3	2	1	0				
4		6	5	4	3	2	1	0			
K 5			6	5	4	3	2	1	0		
6				6	5	4	3	2	1	0	
7					6	5	4	3	2	1	0
											D


$$D=13+K-X$$

C value with D=0 mounting plates

K	3	4	5	6	7
	-9.0	-8.1	-7.1	-6.1	-5.2
					C

Door clearance

For further explanation → see page 2.12






V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K 5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1 F _{MIN}


Gap Z_{MIN}=0

B-type 170

For wood doors



- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 170°
35mm
12mm
slide-on

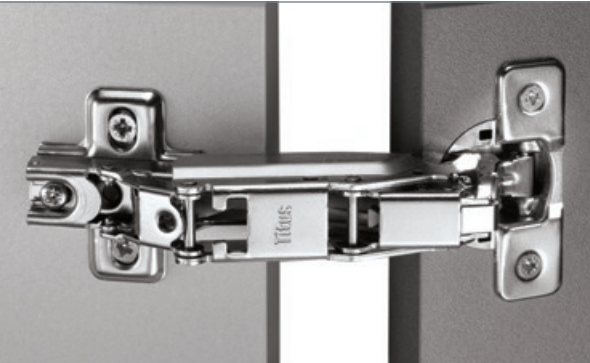




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	248-0160-050	248-0161-050

Drilling patterns for hinge cups → see page 2.15

Cranking

9mm

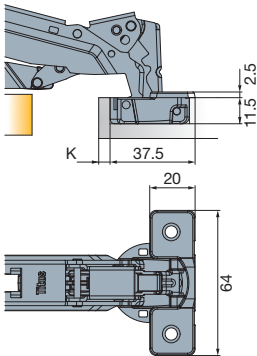

50 Pcs

Made of steel and zinc


Mounting plates

→ see pages 2.163-2.166



Hinge cup screws

If not pre-mounted



820-6308-050

10000 Pcs

Hinge angle restrictor

→ see page 2.171



TouchControl Solutions

→ see pages 2.193-2.204




Soft closing systems

→ see page 2.185





Door adjustment

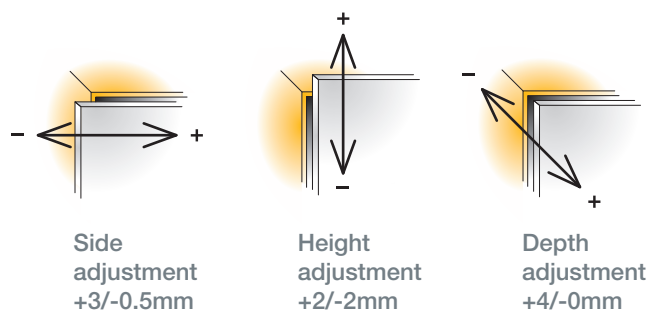


For further explanation → see pages 2.20-2.22

Mounting details



Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.11


X	1	2	3	4	5	6	7	8	9	10	11
3	6	5	4	3	2	1	0				
4		6	5	4	3	2	1	0			
K 5			6	5	4	3	2	1	0		
6				6	5	4	3	2	1	0	
7					6	5	4	3	2	1	0

$$D=4+K-X$$


C value with D=0 mounting plates

K	3	4	5	6	7
	0	0.9	1.9	2.9	3.8


Drawings show application on D=0mm mounting plate



Drawing shows application on D=0mm mounting plate




Drawing shows application on D=9mm mounting plate



Drawing shows application on D=18mm mounting plate

Door clearance

For further explanation → see page 2.12




V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K 5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1

Gap Z_{MIN}=0

B-type

for Pie-cut Corner Cabinet

For wood doors



- Drilling diameter for hinge cup 35mm
- Drilling depth 11.5mm
- Hinge on plate mounting system slide-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number	Item number
Screw-on	248-0T81-050	248-0T80-050
Machine insertion	248-0U13-050	248-0U14-050

Drilling patterns for hinge cups → see page 2.15

Corner cabinet



100 Pcs

Cup made of steel, arm made of zinc


Mounting plates
→ see pages 2.163-2.166



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050




10000 Pcs

TouchControl Solutions
→ see pages 2.193-2.204




· Use in pair with 170° hinge

Door adjustment

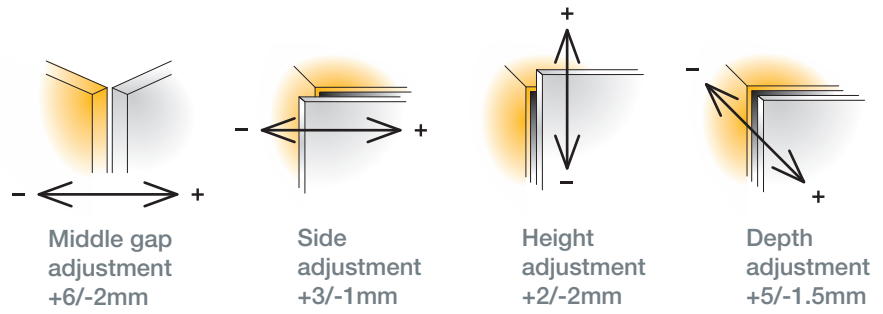


For further explanation → see pages 2.20-2.22


Mounting details

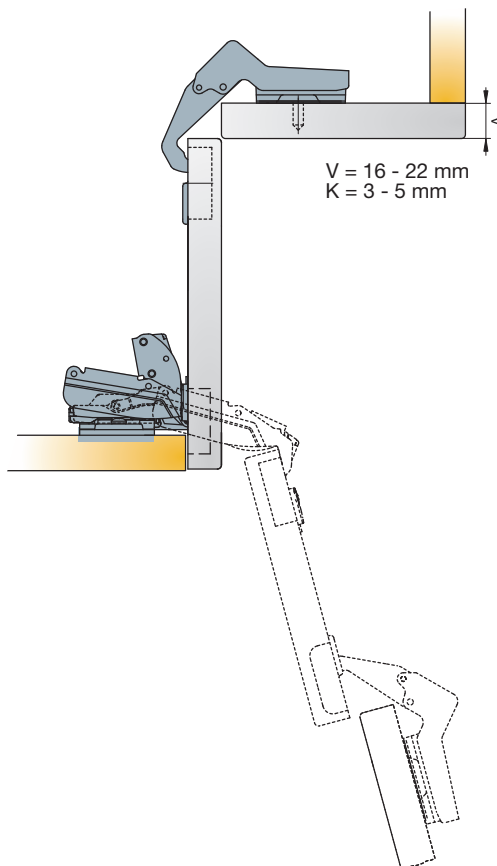


Mounting plate drilling distance



Adjustments

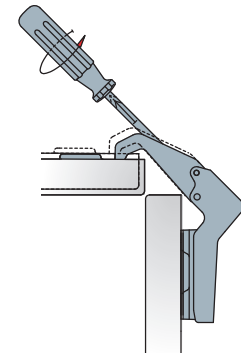

The diagonal adjustment is made by rotating the appropriate screw as shown on the drawing.

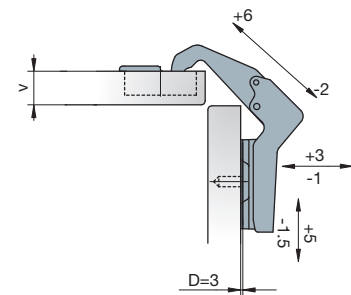


Drawings show application on $D=3 \text{ mm}$ mounting plate.

B-type

Flap door hinge

For wood doors

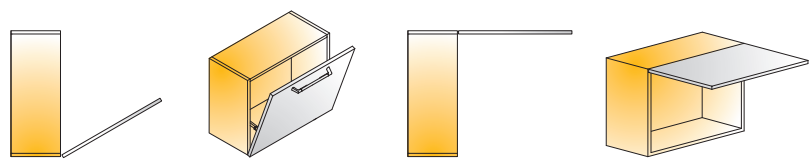

- Opening angle
 - Drilling diameter for hinge cup
 - Drilling depth
 - Hinge on plate mounting system
- 90°
35mm
11.5mm
slide-on



Cranking

0mm



		Interaxis 24mm
		Item number
left	Screw-on	926-0A26-050
right	Screw-on	926-0A27-050
* For application it is mandatory to order left and right hinge		

200 Pcs

Cup made of steel


Mounting plates
→ see pages 2.163-2.166



Cover caps for hinge arm
→ see page 2.173



Hinge cup screws
If not pre-mounted



820-6308-050

10000 Pcs


TouchControl Solutions
→ see pages 2.193-2.204





Use with flap stay mechanisms

Door adjustment

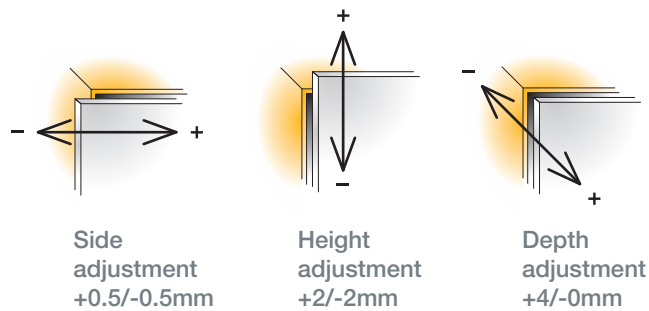

For further explanation → see pages 2.20-2.22


Mounting details

Mounting plate thickness table

For further explanation → see page 2.11

D	0	1	2	3
B	20	21	22	23


$$X = 22.5 + K - A$$

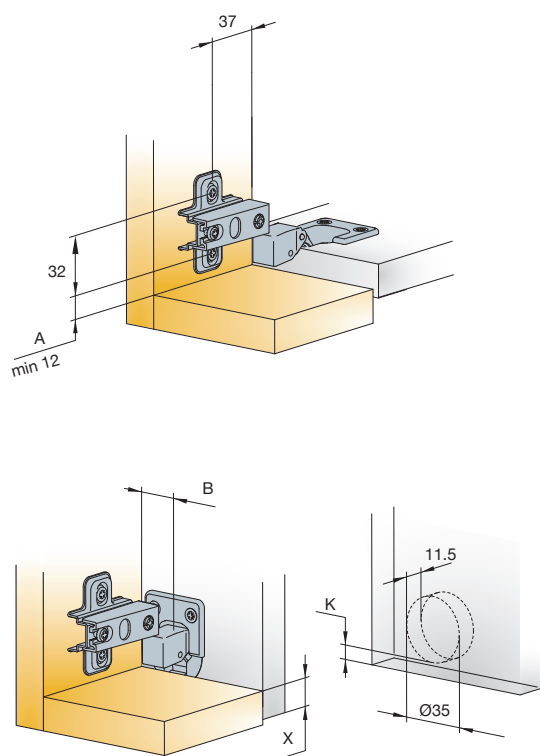

B = distance between two holes center
for fixing screws on the hinge cup and side panel

Door clearance

For further explanation → see page 2.12





V	16	17	18	19	20	21	22	
K	3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
	4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
	5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap Z_{MIN}=0

B-type Mounting Plates



B-type slide-on mounting

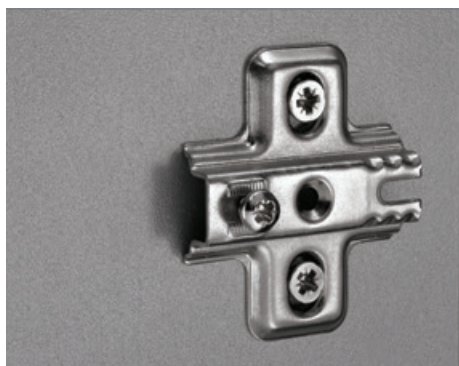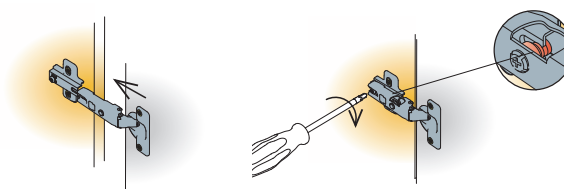

Cruciform mounting plate



Drilling pattern

Dimensions




 200 Pcs Made of steel

Zinc diecast cruciform
mounting plate




 200 Pcs Made of zinc

Fixing screws for mounting plates
If not pre-mounted



Euro screws
821-6304-050 L=11
821-6323-050 L=13
821-6332-050 L=15

 10000 Pcs




Chipboard screws
820-6328-050









 10000 Pcs




Mounting plate thickness



Height adjustment +/- 2mm


Mounting plate type			 13	 15	 15	 10.5	 7.5	 10.5
Mounting plate thickness (D)								
Item number								
0mm	244-0866-050	*244-0L29-050	244-0965-050	244-0929-050	*244-0L26-050	*244-0L50-050	244-0H64-050	244-0P24-050
1mm	244-0T40-050		244-0K95-050		*244-0S65-050		244-0S67-050	
2mm	244-0T28-050		244-0K96-050		*244-0S66-050	*244-0V64-050	244-0S68-050	
3mm	244-0867-050	*244-0L39-050	244-0G19-050	244-0930-050	*244-0L98-050	*244-0L40-050	244-0H65-050	244-0P25-050
* Available upon special request → see page 0.3								
4mm	244-0L37-650		244-0K97-650				244-0M28-650	
5mm	244-0L38-650		244-0K98-650	244-0T14-650			244-0M29-650	
6mm	244-0232-650		244-0914-650			*244-0B12-650		
9mm	244-0062-650		244-0067-650	244-0P41-650				
18mm	244-0063-650		244-0068-650	244-0175-650				
* Available upon special request → see page 0.3								

Legend of mounting plate type symbols

		 13	 15	 15	 10.5	 7.5	 10.5
Screw-on ready for euro screws ← screws	Screw-on ready for chipboard ← screws	Pre-mounted 13mm euro screws	Pre-mounted 15mm euro screws	Pre-mounted chipboard screws	Machine insertion ready	Pre-mounted 7.5mm expanding dowels	Pre-mounted 10.5mm expanding dowels
							

B-type Mounting Plates

B-type slide-on mounting


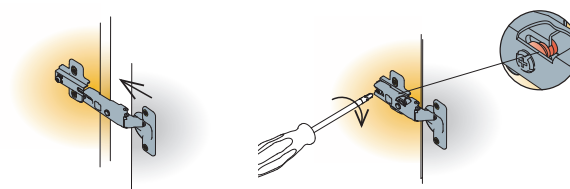


Drilling pattern

Dimensions


Cruciform mounting plate

- Back-to back application




 200 Pcs


Made of steel



Mounting plate thickness




Height adjustment +/- 2mm

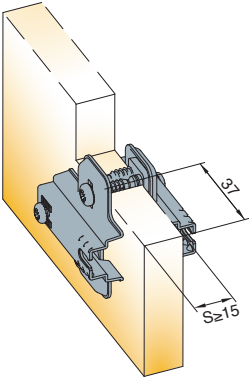	Mounting plate type			
	Mounting plate thickness (D)	 Item number		
 Minimum panel thickness is 15mm	3mm	244-0V50-050		

Legend of mounting plate type symbols





Pre-mounted
10.5mm
expanding dowels



Wide Angle Hinge 270

For wood doors





- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

270°
35mm
12.5mm
key-hole



Technical details

Wide angle hinge 270

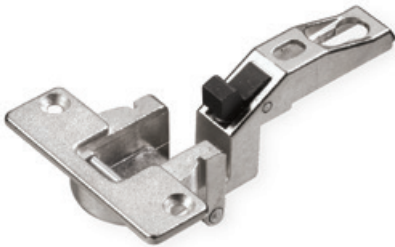

200 Pcs

Made of zinc

Cruciform mounting plate




200 Pcs

Made of zinc

Cup type	With spring	Item number
 Screw-on		241-0043-650
 Machine insertion		241-0050-650
D=0mm		
 Screw-on		244-0907-650
 Pre-mounted		244-0848-650
D=2mm		
 Screw-on		244-0D99-650
 Pre-mounted		244-0E02-650
D=6mm		
 Screw-on		244-0D47-650
 Pre-mounted		244-0D46-650
This mounting plate can be only used with Wide angle hinge 270. Information about mounting plate symbols → see page 2.16		


Hinge cup screws
If not pre-mounted




820-6308-050

10000 Pcs

Door adjustment

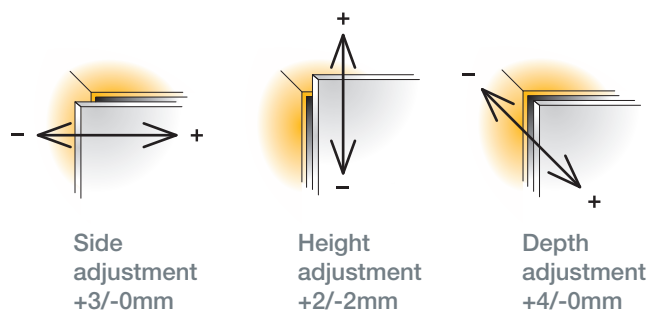

For further explanation → see pages 2.20-2.22






With spring catch


Mounting details

Mounting plate thickness table

For further explanation → see page 2.11



Mounting plate drilling distance



Mounting plate drilling distance


S	16	17	18	19	20	21	22	23	24
0	2		0						
1		2		0					
2			2		0				
3				2		0			
4	6				2		0		
5		6				2		0	
P 6			6				2		0
7				6				2	
8					6				2
9						6			
10							6		
11								6	
12									6 D

Door thickness



For correct opening, door thickness has to be (V_{MAX}) 21mm

Refrigerator Cabinet Hinge



- Opening angle 100°
- Drilling diameter for hinge cup 35mm
- Drilling depth 11mm
- Hinge on plate mounting system key-hole




Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
Screw-on	248-0R09-050	248-0K10-050
Machine insertion		248-0M41-050

Drilling patterns for hinge cups → see page 2.15

Cranking

0mm



200 Pcs

Cup made of steel, arm made of zinc

Cruciform mounting plate




Screw-on	244-0655-050	
13 Pre-mounted	244-0846-050	

This mounting plate can be only used with Refrigerator Cabinet Hinge.
Information about mounting plate symbols
→ see page 2.16

500 Pcs

Made of steel


Hinge cup screws
If not pre-mounted



820-6308-050


10000 Pcs

Door adjustment

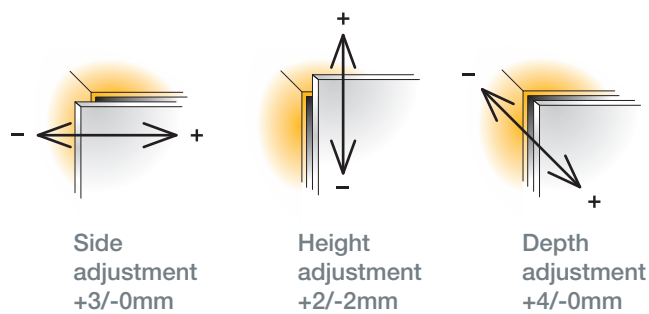


For further explanation → see pages 2.20-2.22

Mounting details

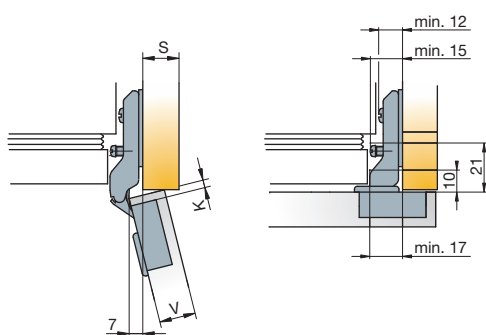


Drawings show application on mounting plate

Mounting plate drilling distance



Door clearance

For further explanation → see page 2.12




V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

Gap Z_{MIN}=0


Hinge Angle Restrictors





For all Titus Hinges with 110° and 170° opening angle

For 110 hinges




For 170 hinges




		Technical details	Item number	Light grey
80° Hinge Angle Restrictor T-type		For all T-type 110°	728-4669 →	380
  				
 200 Pcs		Made of plastic		
80° Hinge Angle Restrictor S-type, B-type		For all S-type 110° and B-type 110°	248-4668 →	380
  				
 200 Pcs		Made of plastic		
135° Hinge Angle Restrictor		For all 170° hinges	248-4672 →	380
  				
 200 Pcs		Made of plastic		

- Hinge angle restrictor limits opening angle
- Prevents door damage
- Easy and quick mounting and dismounting


Mounting details

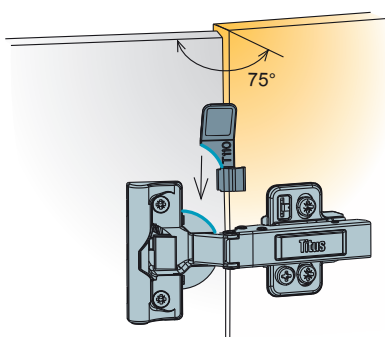


Open the door to approximately 75° and position angle restrictor to follow the hinge cup form

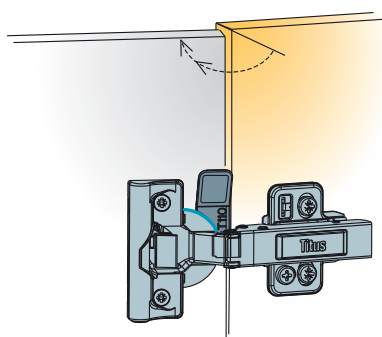


Push to fully open. Audible click indicates angle restrictor is in the right position

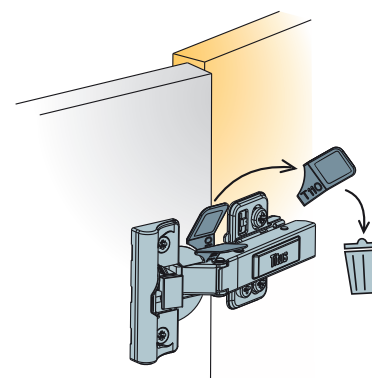


Close the door to remove the restrictor holder (cracks by itself while closing the door)

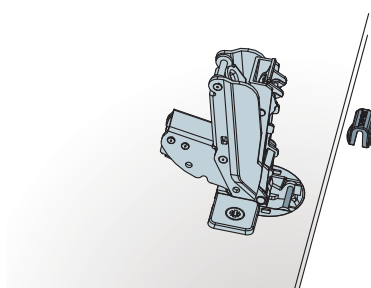

Hinge has to be in closed position

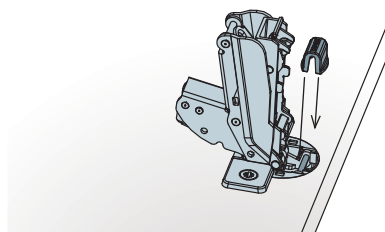

Insert angle restrictor into the hinge cup

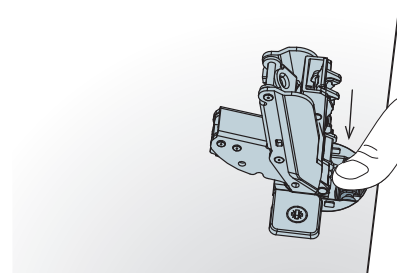




When angle restrictor is in the right position push it down

Recommended to insert angle restrictor while doors are not mounted on the cabinet

Cover Caps

For 110 hinges

For hinge arms


		Technical details	Logo	Item number	 Nickel plated
T-type    5000 Pcs Made of steel			Titus	728-1286 →	054
			without	728-1283 →	054
			Not for 5mm, 9mm, 17mm hinge cranking		
T-type    5000 Pcs Made of steel			Titus	728-1287 →	054
			without	728-1284 →	054
			For all T-type range		
S-type B-type    4000 Pcs Made of steel			Titus	248-1646 →	050
			without	248-1712 →	050

Glissando Soft Closing Systems for Hinges




ConfidentClose

- 1 Fast closing
- 2 Late start of deceleration action
- 3 Quiet landing with 'SoftTouch'




Tool-less mounting

- Reduced assembly time
- Flexible usage also as a retrofit option



Consistent Performance

- Only one Glissando for two to three hinges
- Allows for consistent performance on a wide range of door dimensions and weights

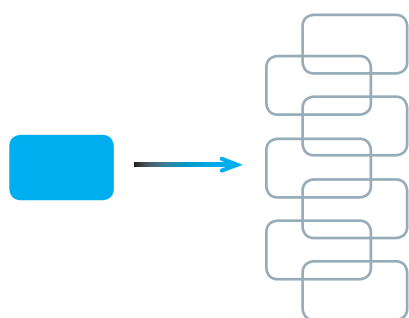

One-for-all

- One item fits multiple applications
- Same item can be used on all crankings and angled hinges



Titus Damper Inside

- Titus proprietary multi-purpose damping technology
- Efficient modular design
- Reliable and consistent damping

Glissando Add-on

Soft Closing Range

How to Choose the Right Glissando?

Glissando TT
 Glissando TL3
 Glissando TL 170
 Glissando CR
 Glissando AL

Titus Glissando soft closing system is available for the whole range of hinge applications. The user can choose between add-on or stand-alone solutions.

Concealed hinges	Add-on hinge soft closing solutions			Stand-alone door soft closing solution	
	Glissando TT	Glissando TL3	Glissando TL 170	Glissando CR	Glissando AL
T-type 95	X			X	X
T-type 110	X			X	X
T-type 110/15°	X				
T-type 110/30°	X				
T-type 110/45°	X				
T-type 110/90°	X				
T-type 120	X			X	X
T-type 170			X	X	X
S-type 110		X		X	X
S-type 110/15°		X			
S-type 110/24°		X			
S-type 110/30°		X			
S-type 110/45°		X			
S-type 110/90°		X			
S-type 170			X	X	X
S-type 110 AL					X
B-type 110		X		X	X
B-type 110/30°		X			
B-type 110/45°		X			
B-type 110/90°		X			
B-type 170			X	X	X
B-type 110 AL					X




Titus Glissando soft closing devices can't be used with unsprung and reverse spring hinges.

Glissando TT 'One-for-all'

T-type

- One item fits multiple applications
- Same item can be used on all crankings and angled hinges
- Designed to fit the concealed hinge cup
- Tool-less mounting
- Suitable for different types of cabinets for kitchens, living rooms, bathrooms and other furniture




T-type 95 0mm		T-type 110/15° 9mm	
T-type 110 0mm		T-type 110/30° 9mm	
T-type 110 5mm		T-type 110/45° 9mm	
T-type 110 9mm		T-type 110/45° 17mm	
T-type 110 17mm		T-type 110/45° 23mm	
T-type 120 0mm		T-type 110/90° 17mm	

Glissando

Application

Glissando TL3 'One-for-all'

S-type B-type



- One item fits multiple applications
- Same item can be used on all crankings and angled hinges
- Adjustable damping enables perfect functioning on every door
- Designed to fit the concealed hinge cup
- Tool-less mounting
- Suitable for different types of cabinets for kitchens, living rooms, bathrooms and other furniture

S-type 110
0mm




B-type 110
0mm

S-type 110
9mm



B-type 110
9mm

S-type 110
15mm



B-type 110
15mm

S-type 110/15°
9mm



B-type 110/30°
9mm

S-type 110/24°
9mm



B-type 110/45°
9mm

S-type 110/30°
9mm




B-type 110/45°
18mm

S-type 110/45°
9mm



B-type 110/90°
18mm

S-type 110/45°
18mm



S-type 110/90°
18mm



Glissando



Number per Door and Positioning

How Many Glissandos per Door?

Add-on hinge soft closing solution

Glissando TT
Glissando TL3
Glissando TL 170

Number of Glissando per door depends on door dimensions, door weight, hinge arrangement.
Trial mounting is recommended.

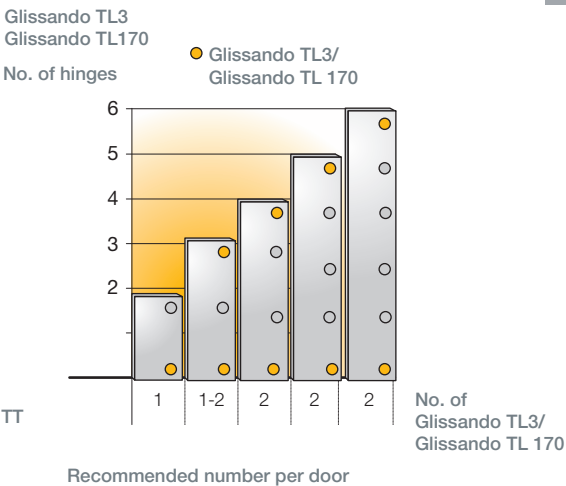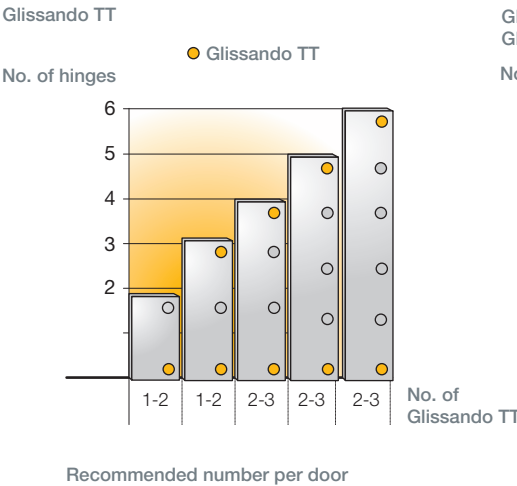

Stand-alone soft closing solution

Glissando CR
Glissando AL

Mount Glissando CR/AL on the hinged side of the cabinet on the top or bottom.




Glissando

Mounting


How to Mount Glissando?

Tool-less mounting

Glissando TL3
Glissando TT
Glissando TL 170

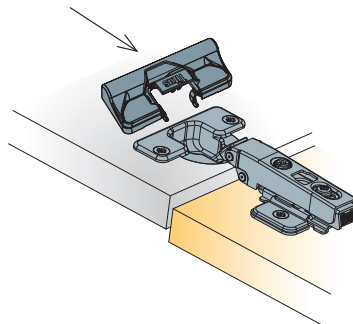

Simple tool-less assembly: Insert Glissando into the holes on the hinge and press down with hand.

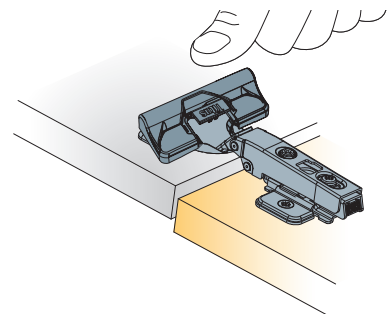


The tool-less 'snap on' version for reduced assembly time and flexibility of application. Glissando TL can be mounted at any time after furniture assembly so can be offered as a retro fit option by the installer.

Screw-on into the cabinet corner

Glissando CR


Glissando CR is mounted into the cabinet corner by using chipboard screws 20mm long.

Glissando dampers' discreet design enhances the look of the door and occupies minimal space in the cabinet interior.




Screw-on onto the mounting plate

Glissando AL



Position the mounting plate below the hinge arm and fix with two screws. Use hinge mounting plate as a reference.



Slide Glissando AL onto the mounting plate

Glissando

Damping Adjustment

How to Adjust Damping?


Add-on hinge soft closing solution

Glissando TL 170


Glissando features quarter turn adjustment to provide optimal closing speed for any door dimensions and weight.

The damping function can be adjusted to fit different door weights which enables

- perfect door functioning
- use of the same type of Glissando for various doors



Adjustable damping zone

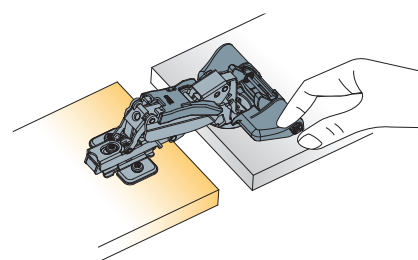


Turn towards '+' to increase and '-' to decrease the damping

Stand-alone soft closing solution


Glissando CR
Glissando AL

Turn towards '+' to increase or towards '-' to decrease the damping.

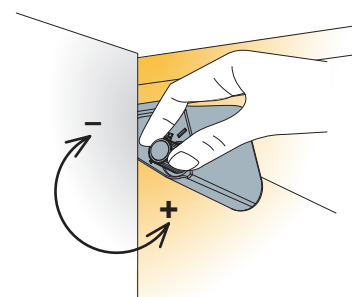

Damping adjustment

- Simple mounting
- Intuitive damping adjustment




Turn towards '+' to increase and '-' to decrease the damping



Glissando TT

Glissando TL3

Add-on Hinge Damper

For 95°, 110° and 120° hinges




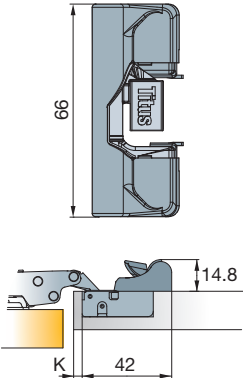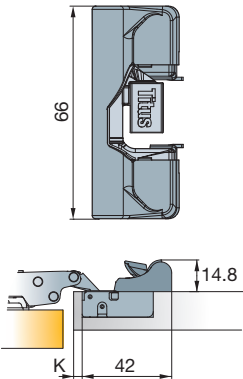		Technical details	Hinge opening angle	Item number
Glissando TT • T-type 95 • T-type 110 • T-type 120   200 Pcs Made of steel and plastic			95°, 110°, 120°	729-0K71-054
Glissando TL3 • S-type 110 • B-type 110   200 Pcs Made of steel and plastic			110°	951-0D45-054

- Same item can be used on most of crankings and angled hinges
- Intuitive snap-on mounting
- Low protrusion in cabinet interior
- Consistent performance across a broad range of furniture doors

Mounting details


Tool-less mounting

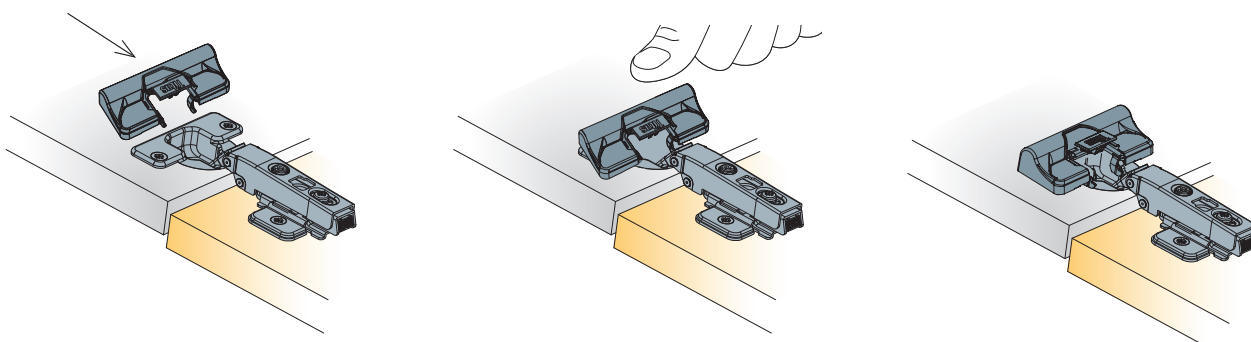

Insert Glissando TL3 into the holes on the hinge

Press down


Dismounting details

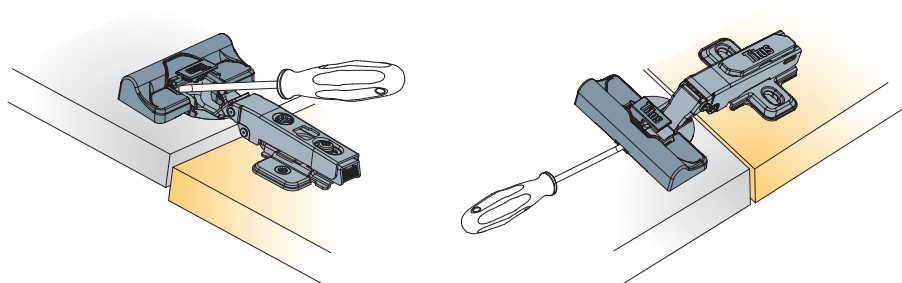

Use flat screwdriver

A trial mounting is always recommended.



Recommended number of Glissandos per door

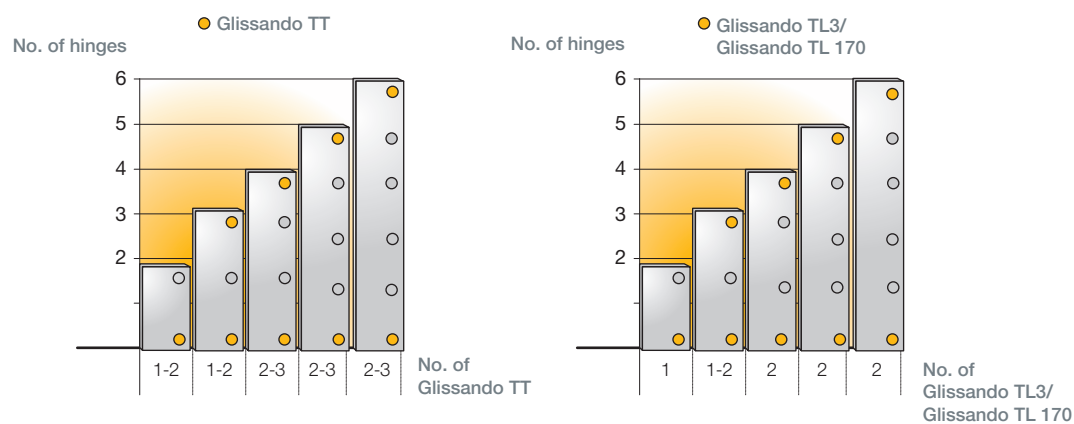

Glissando TL 170

Add-on Hinge Damper

For T-type 170, S-type 170 and B-type 170 hinges



Glissando TL 170

Technical details

Hinge
opening angle


Item
number

170°


951-0F15-650



Soft closing mechanism



Striking plate



Box content
100 pcs soft closing
mechanisms
100 pcs striking plates




100 Pcs

Made of steel, plastic and zinc

- Gentle and reliable soft closing on doors with wider opening angle
- Fits perfectly 45/9.5mm, 48/6mm and 52/5.5mm hinge cups
- ConfidentClose
- Tool-less mounting


Damping adjustment

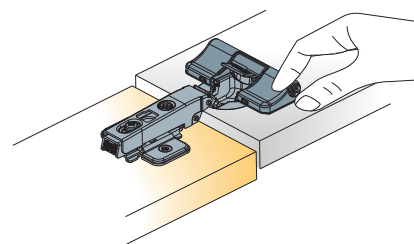


Turn towards '+' to increase and '-' to decrease the damping

Mounting details


Tool-less mounting

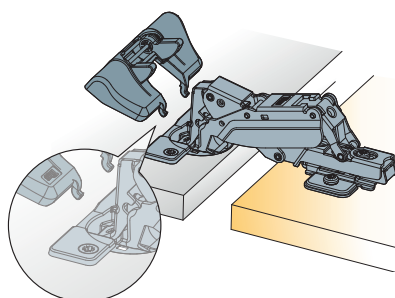


Insert Glissando TL 170 into the holes on the hinge cup

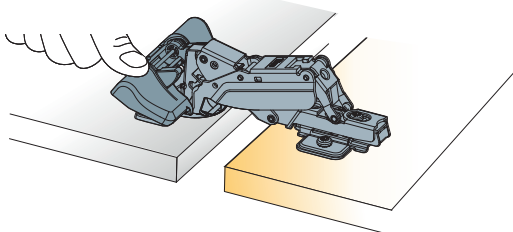

Press down

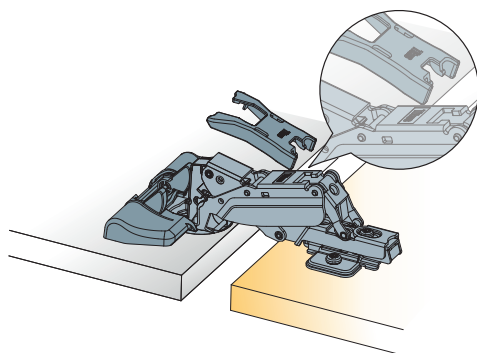


Place the striking plate into the hole on the hinge arm

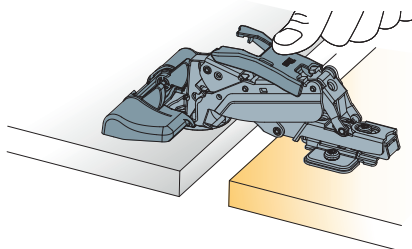

Press down


Recommended number of Glissandos per door

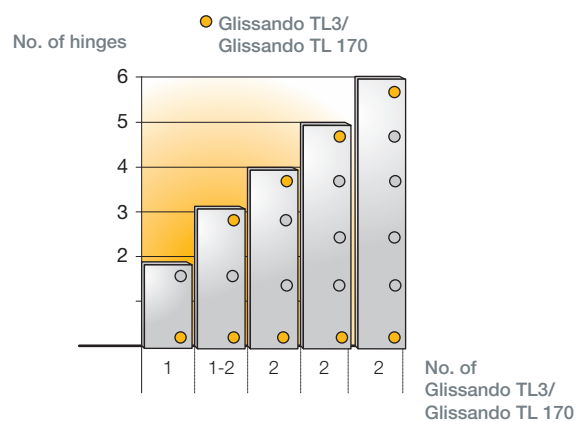








Glissando AL

Add-on Hinge Damper


For 20mm aluminium frame doors

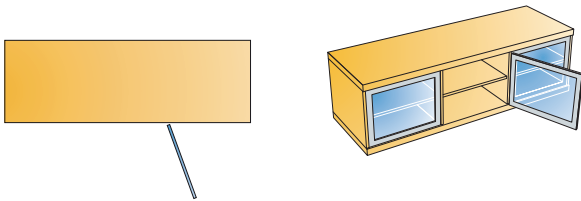

- Simple mounting
- Intuitive damping adjustment

		Technical details	Item number	Grey
Glissando AL     200 Pcs			972-0420 →	380
Full overlay mounting plate     200 Pcs			972-4564 →	380
Half overlay mounting plate     200 Pcs			972-4565 →	380
Inset door mounting plate     200 Pcs			972-4566 →	380


Hinge cup screws
 If not pre-mounted



972-6344-042
 1000 Pcs


- Simple mounting
- Intuitive damping adjustment
- Use with B-type AL hinges

Damping adjustment




Turn towards '+' to increase and '-' to decrease the damping



Mounting procedure

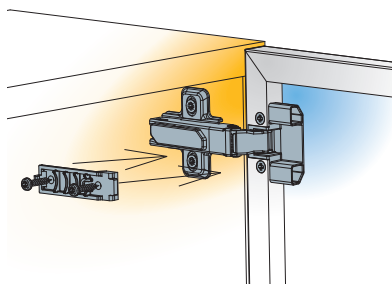

Position the mounting plate below the hinge arm and fix it with two screws. Use hinge mounting plate as a reference.

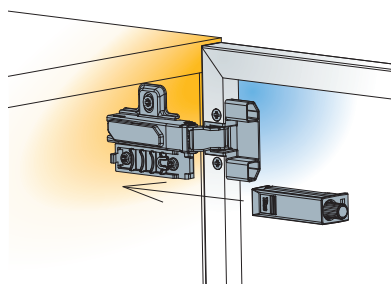


Slide Glissando AL onto the mounting plate.

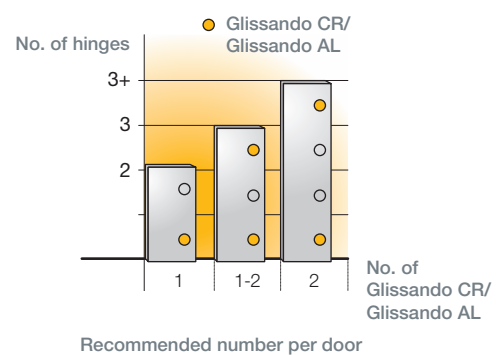
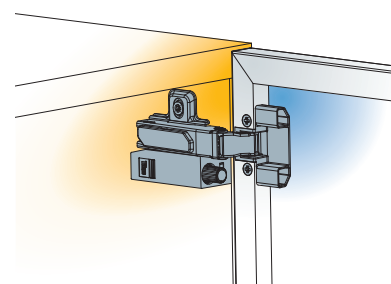


Glissando CR

Stand-alone Damper


For full overaly and half overaly
concealed hinges



Technical details		Hinge opening angle	Cranking	Item number	White housing	Grey housing	Beige housing
 Glissando CR for full overlay hinges  Nominal 11 (Adjustment: Nominal + 5mm)  100 Pcs Made of plastic		110°	0mm, 5mm	972-0X19 →→	350	380	360
		*Fixing screw included in a set					
Glissando CR for half overlay hinges  Nominal 10 (Adjustment: Nominal + 5mm)  100 Pcs Made of plastic		110°	9mm, 17mm	972-0X34 →→		380	
		*Fixing screw included in a set					



- Intuitive 'place and fix' installation in the corner of the cabinet
- Tool-less damping adjustment
- One item for a wide range of doors
- Reliable performance
- Can be paired with all self-closing hinges

Damping adjustment




Turn towards '+' to increase and towards '-' to decrease the damping



Mounting details




Mount Glissando CR on the hinged side of the cabinet



One screw fixing

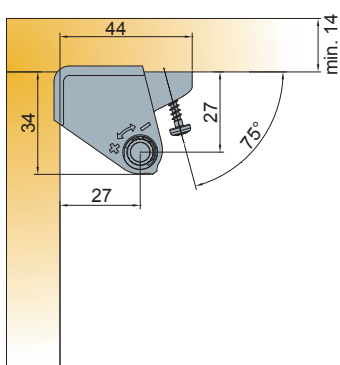


Mount Glissando CR on the hinged side of the cabinet



One screw fixing



The functioning of Glissando CR depends of the hinge's closing force. A trial mounting is always recommended.

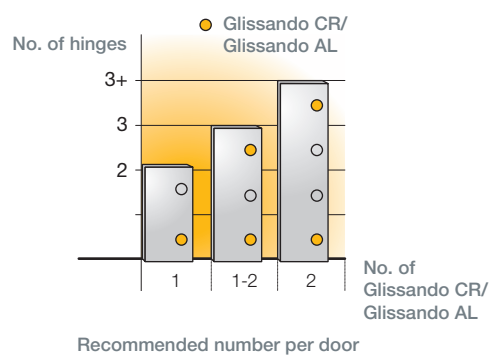


TouchControl Solutions



Push Latch S3

- Soft push opening system controls the outward motion for smooth, silent, and bounceless door movement
- Integrated damper ensures a soft landing, protecting the cabinet and enhancing user comfort

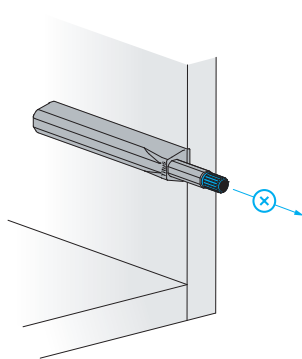


Built-in SafeGuard

- For enhanced safety, adjustment button can't be removed
- Prevents from misuse



Noir, elegant and discreet dark finish

- Seamless integration of hardware into the furniture
- Uniform and discreet surface




Toolless door gap adjustment

- Easy to compensate any door gaps that might occur during installation
- Adjustment button designed for smooth, hand-operated adjustment



Titus damper inside

- Push latch S2 and S3 version ensure controlled, soft and silent door opening
- Smooth user experience without door rebound
- Cushioned door landing




Reliable performance

- Reliable door opening and closing through the life-time

Push Latch S3

For all door types



Tehnickal details

Item number

Dusty white

Anthracite

Black



Push Latch S3 with housing

915-9277 →


356

383

390




Linear mounting plate

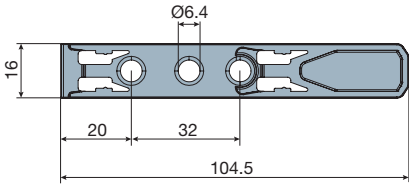


200 Sets Made of plastic

Fixing screws for mounting plates





Euro screws
821-6323-050
5000 Pcs




Chipboard screws
820-6328-050
10000 Pcs


- Soft and silent push opening
- Door gap adjustment ensures reliable closing and consistent performance
- 'Safety click' feature for easy detachment of the mechanism from its mounting plate
- Lip on the mounting plate assures accurate positioning

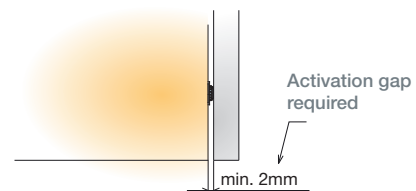



Drilling pattern




Mounting



Depth adjustment

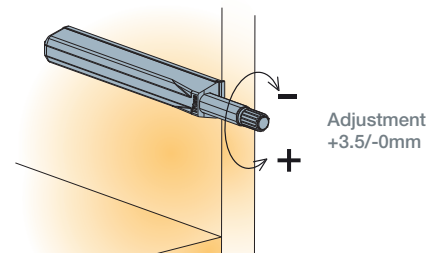

Positioning




Mounting position close to the 'touch opening point' on the side opposite to hinges.

For application on cabinets with more than 2 hinges and cabinets with narrow doors we recommend a trial mounting.

Push Latch S3

For wood doors



Tehnical details

Item number

Dusty white

Anthracite

Black


Push Latch S3 drill-in

915-9276 →

356

383

390

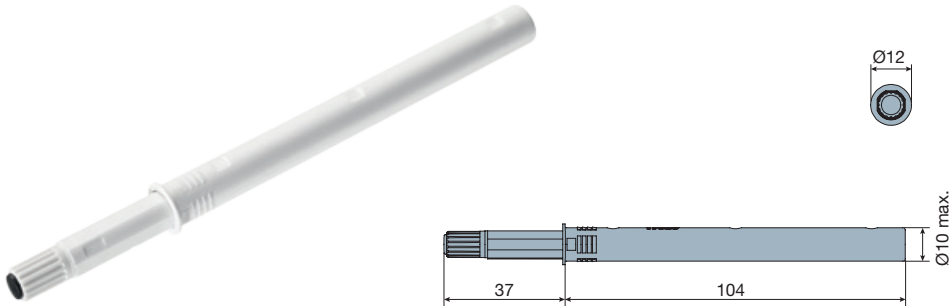

200 Pcs Made of plastic


Push Latch S3 routed

915-9278 →

356

383

390

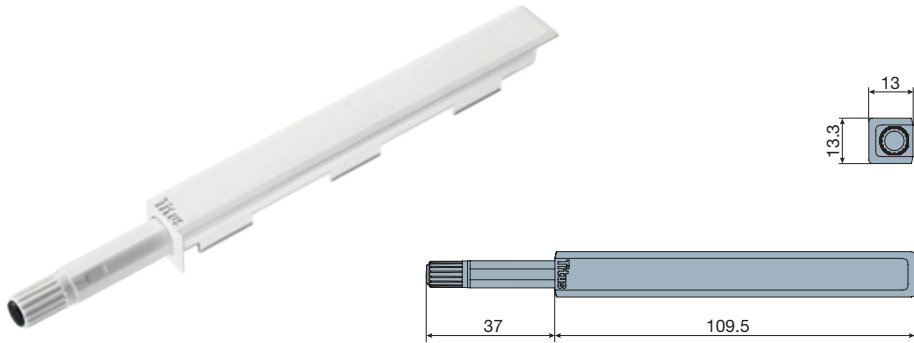

200 Sets Made of plastic


Drilling jig for Push Latch S3 drill-in




915-9900-072

1 Pc


- Soft and silent push opening
- Door gap adjustment ensures reliable closing and consistent performance
- Positioning lip assures accurate position

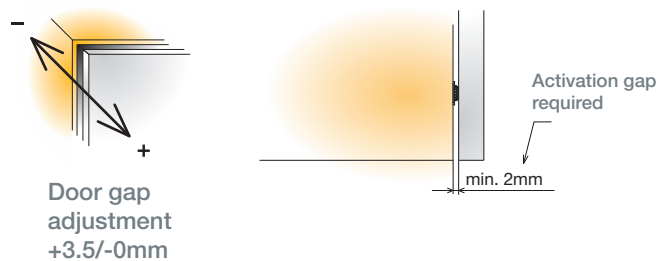





Drilling pattern




Mounting

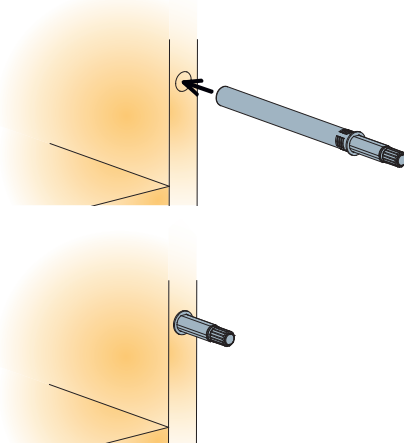

Depth adjustment

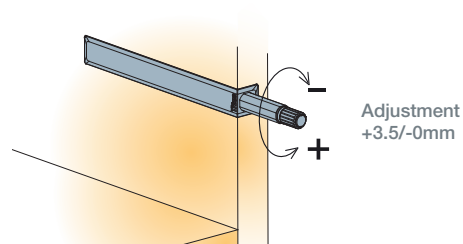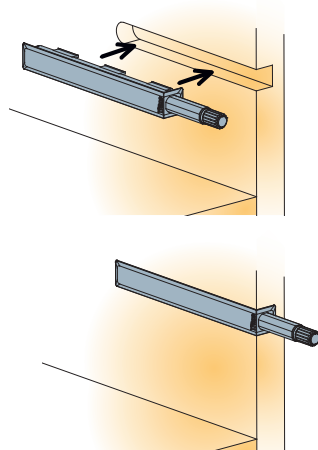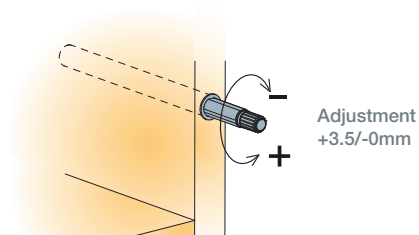

Positioning




Mounting position close to the 'touch opening point' on the side opposite to hinges.

For application on cabinets with more than 2 hinges and cabinets with narrow doors we recommend a trial mounting.

Push Latch S2

For wood doors



Push Latch S2



Push Latch S2



Linear mounting plate with lip

 200 Sets Made of steel and plastic

Item number

Silver grey

915-0W34 →


381

Set consists of:




 200 Sets

Fixing screws for mounting plates





Euro screws
821-6323-050
 5000 Pcs




Chipboard screws
820-6328-050
 10000 Pcs

- Bounceless and reliable door opening and closing
- Safety detachment feature of the mechanism from its mounting plate
- Depth adjustment assures reliable and consistent push-to-open action
- Compatibility with damped or non-damped hinges ensures soft landing of the door


i Push latch S2 works with standard hinges with and without damping

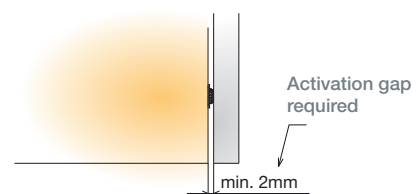


Drilling pattern




Mounting

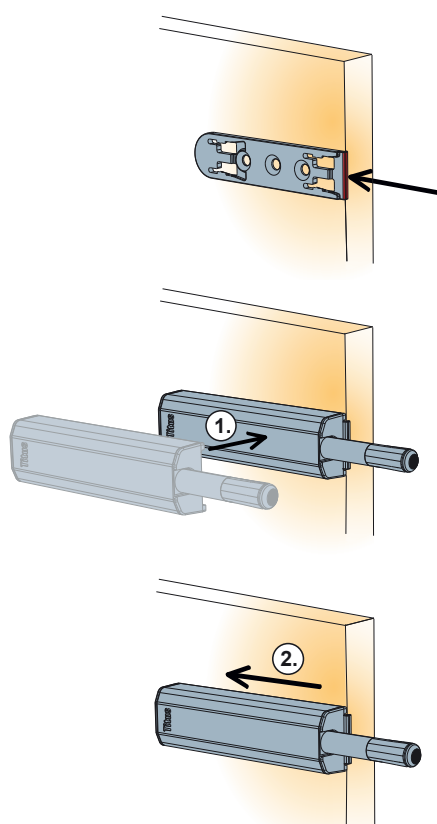

Depth adjustment

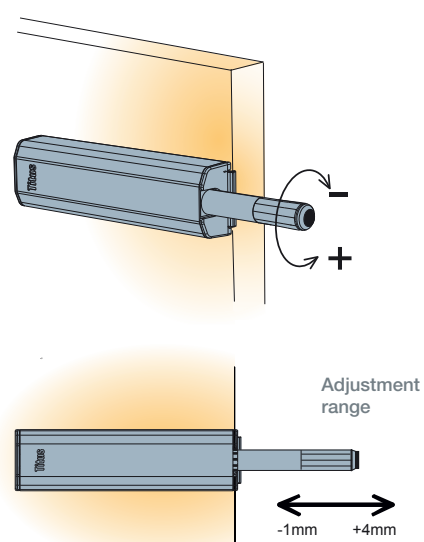

Positioning




Mounting position close to the 'touch opening point' on the side opposite to hinges.

For application on cabinets with more than 2 hinges and cabinets with narrow doors we recommend a trial mounting.

Push Latch

For wood doors and drawers



Push Latch



Push Latch



Cruciform mounting plate




Linear mounting plate

- With bumper
- With bumper
- With magnet
- Linear mounting plate
- Cruciform mounting plate


Spring force [N] (released)	Spring force [N] (loaded)	Item number	Silver grey
10	20	915-0X59 →	381
13	27	915-0320 →	381
10	20	915-0D22 →	381
		915-4175 →	381
		915-4183 →	381
Sets:			
Cruciform m. plate		Linear m. plate	
915-0X59-381-K1		915-0X59-381-K2	
200 Sets		200 Sets	
915-0D22-381-K1		915-0D22-381-K2	
200 Sets		200 Sets	

200 Pcs Made of steel and plastic

Fixing screws for mounting plates



Euro screws
821-6323-050
5000 Pcs




Chipboard screws
820-6328-050
10000 Pcs

Accessories for Push latch with magnet (nickel plated steel)

Counter plate self adhesive




A = Ø15 915-7159-050 500 Pcs



A = Ø10 B = Ø5 915-7196-050 500 Pcs

A = Ø15 B = Ø8 915-7190-050 500 Pcs



Knock-in Counter plate



A = Ø10 B = Ø2.8 915-7199-050 500 Pcs

- Effortless opening with just a light touch
- Depth adjustment ensures reliable closing and consistent performance in case of inaccurate drilling
- 'Safety click' feature for easy detachment of the mechanism from its mounting plate




i Push latch with bumper works with standard hinge
 Push latch with magnet works with reverse spring hinges or unsprung hinges

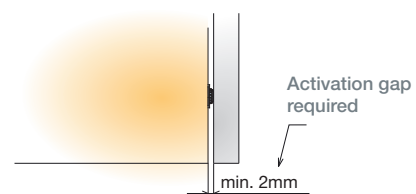


Drilling pattern

Dimensions

Depth adjustment

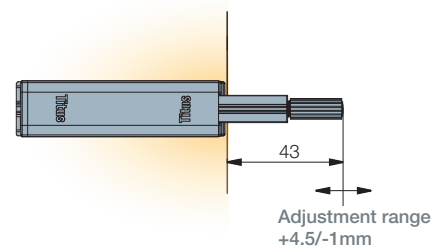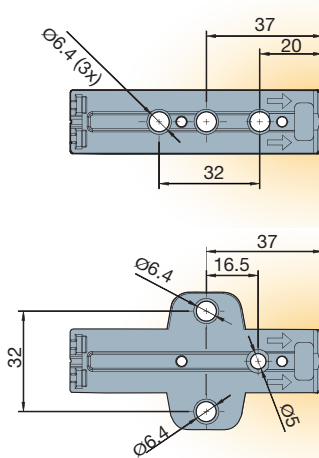


Positioning




Mounting position close to the 'touch opening point' on the side opposite to hinges.

For application on cabinets with more than 2 hinges and cabinets with narrow doors we recommend a trial mounting.

PushOpen Short



PushOpen
Short

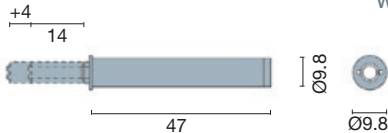

With bumper

With magnet

Technical details

Stroke [mm]

Item number

White

Grey


Lead grey

Black

100 Pcs

Made of steel and plastic


Housing
Short

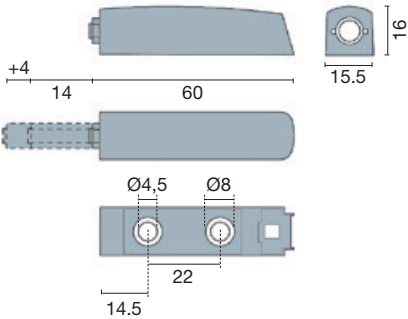

100 Pcs

Made of plastic


Fixing screws for housing



Chipboard screws
820-6328-050
10000 Pcs

Accessories for PushOpen with magnet (nickel plated steel)


Counter plate self adhesive



A = Ø15

915-7159-050 500 Pcs

Counter plate




A = Ø10 B = Ø5

915-7196-050 500 Pcs

A = Ø15 B = Ø8

915-7190-050 500 Pcs

Knock-in Counter plate





A = Ø10 B = Ø2.8

915-7199-050 500 Pcs

- Effortless opening with just a light touch
- Depth adjustment ensures reliable opening



PushOpen with bumper works with standard hinge
PushOpen with magnet works with reverse spring or unsprung hinges

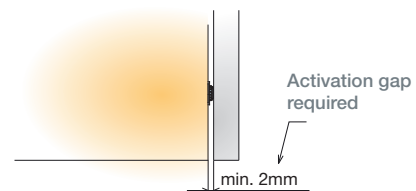



Drilling pattern and mounting procedure


Depth adjustment

Door gap adjustment




Without housing



Adjustment made by rotating the depth adjustment screw

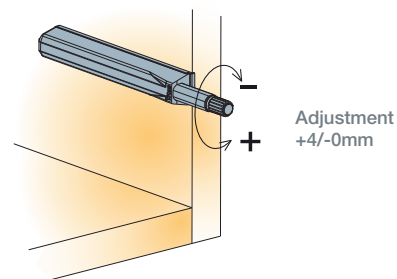


With housing




Application on door for Counter plates

Application on door for Counter plate with double side tape and knock-in counter plate


Positioning



Pre-drilled hole
ØB x 10mm






Sticking or knock-in
position




Close to the 'touch opening point'
on the side opposite to hinges

PushOpen Long



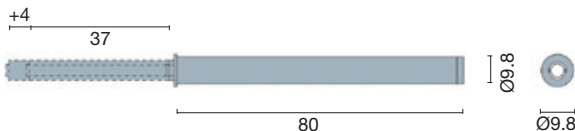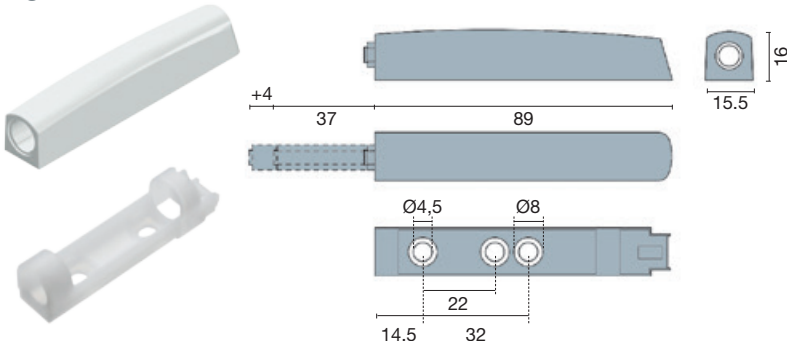		Technical details		Stroke [mm]	Item number	White	Grey	Lead grey	Black
PushOpen Long		With bumper	37	915-7188 →	350	380	383	390	
		With magnet	37	915-7186 →	350	380	383	390	
 100 Pcs Made of steel and plastic									
Housing Long					915-7193 →	350	380	383	390
									
 100 Pcs Made of plastic									


Fixing screws for housing



Chipboard screws
820-6328-050
 10000 Pcs


Accessories for PushOpen with magnet (nickel plated steel)

Counter plate self adhesive



A = Ø15 **915-7159-050**  500 Pcs


Counter plate



A = Ø10 B = Ø5 **915-7196-050**  500 Pcs

A = Ø15 B = Ø8 **915-7190-050**  500 Pcs

Knock-in Counter plate





A = Ø10 B = Ø2.8 **915-7199-050**  500 Pcs

- Effortless opening with just a light touch
- Depth adjustment ensures reliable opening



PushOpen with bumper works with standard hinge
PushOpen with magnet works with reverse spring or unsprung hinges


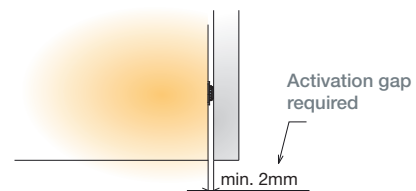



Drilling pattern and mounting procedure




Depth adjustment

Door gap adjustment

Without housing

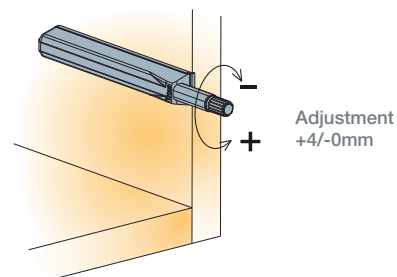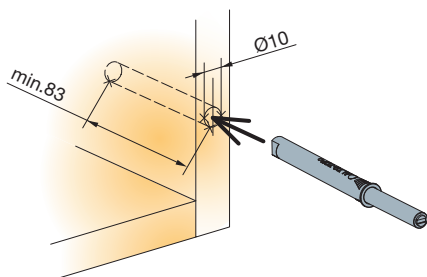


With housing

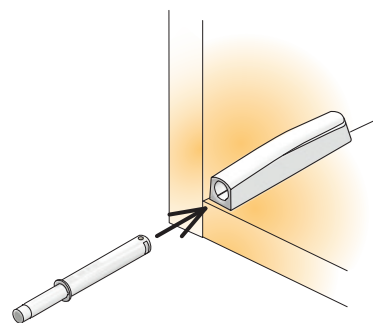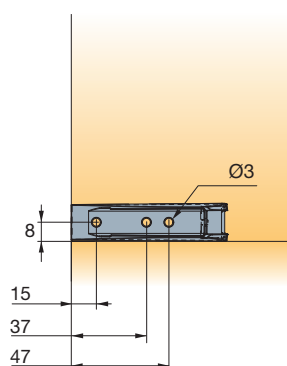


Application on door for Counter plates

Application on door for Counter plate with double side tape and knock-in counter plate


Positioning



Pre-drilled hole
ØB x 10mm





Sticking or knock-in
position



Close to the 'touch opening point'
on the side opposite to hinges


Tekform Slimline+ Drawer

Tekform Slimline+ Drawer

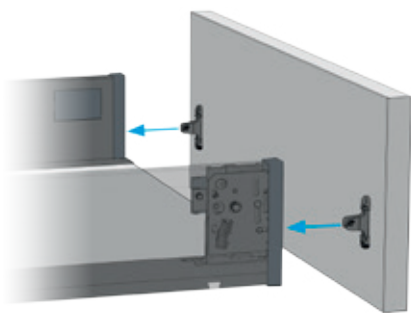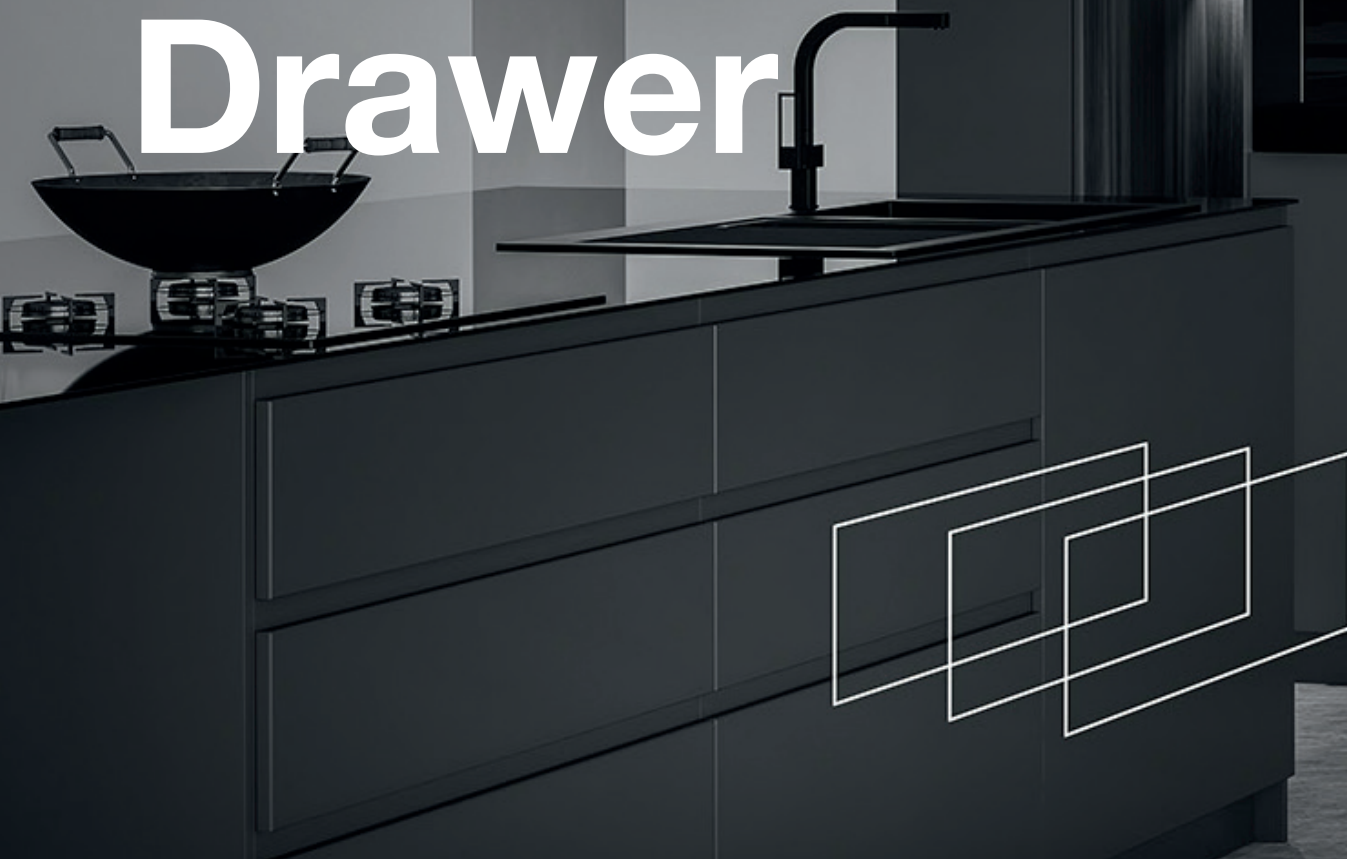


Swift assembly with enhanced front panel engagement

- Improved front panel connection ensures secure engagement and effortless disengagement



3D drawer front alignment with easy access

- Convenient front access for side, height, and tilt adjustment
- Colour-coded adjustment cams for easy identification
- Ensures uniform gap layouts for evenly aligned drawer fronts

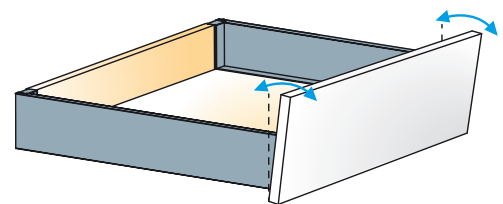


Tilt adjustment

- Accessible at the front of the drawer side
- For an intuitive drawer front positioning through the mechanical stop




Smooth and effortless performance

- Titus Damper Inside with ART function for smooth and controlled movement, regardless of the closing speed
- Low pull-out force
- Optimal closing performance and life-long consistent damping



Push-to-open compatibility for handleless cabinets

- Intuitive mounting without pre-drilling
- One-for-all: one mechanism for all Tekform Slimline+ drawers from 350mm onwards
- Easily adjustable push-to-open activation with only 1.5mm gap to operate
- Same runner for standard and push-to-open application

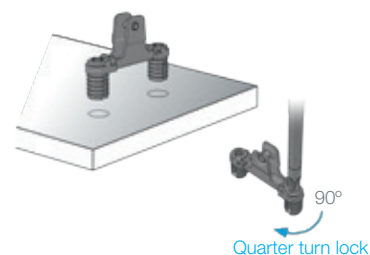





EasyFix front panel attachment

- Simple hand insertion
- Comfortable locking action at 90° turn of screwdriver
- Expando function for firm and reliable front attachment


Tekform Slimline+ Drawer


Product Guide


Page

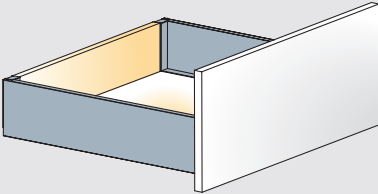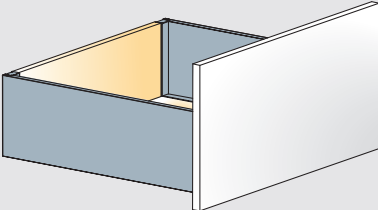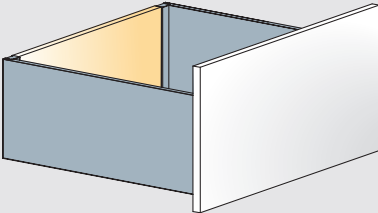Tekform Slimline+ Drawer		Side material	Drawer type	
Tekform Slimline+ drawer DW70		Metal	Soft closing Push-to-open compatible	3.13
Tekform Slimline+ drawer DW100		Metal	Soft closing Push-to-open compatible	3.15
Tekform Slimline+ drawer DW145		Metal	Soft closing Push-to-open compatible	3.17
Tekform Slimline+ drawer DW182		Metal	Soft closing Push-to-open compatible	3.19

	Page
Inner Drawer Front for Tekform Slimline+ Drawer	

Inner drawer front for Tekform Slimline+ Drawer DW70		3.21
--	--	------


Inner drawer front for Tekform Slimline+ Drawer DW145 with bar		3.23
--	---	------

Inner drawer front for Tekform Slimline+ drawer DW182 with bar		3.25
--	--	------

Accessories

Tacto 2.0	3.27
Marking jig	3.28
Steel back panel	3.29

Tekform Slimline Drawer	Side material	Drawer type	
-------------------------	---------------	-------------	--

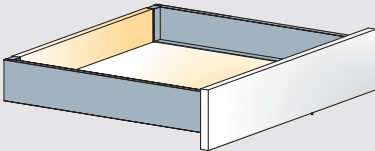Tekform Slimline drawer DW45		Metal	Soft closing Push-to-open compatible	3.31
------------------------------	--	-------	---	------

Tekform Slimline+ Drawer

Information

Technical Guide

How to choose the appropriate drawer dimension?


Select the drawer size based on the available cabinet space. Please refer to the chart below, which indicates the

minimum space required in the cabinet to choose the appropriate drawer system.

NL = Tekform Slimline+ drawer nominal length (mm)

NL	270	300	350	400	450	500	550
----	-----	-----	-----	-----	-----	-----	-----

	Tekform Slimline+ drawer	
	Min. height H required	Cabinet depth D
Tekform Slimline+ drawer DW70	115mm	NL + min. 3mm
Tekform Slimline+ drawer DW100	147mm	NL + min. 3mm
Tekform Slimline+ drawer DW145	198mm	NL + min. 3mm
Tekform Slimline+ drawer DW182	230mm	NL + min. 3mm

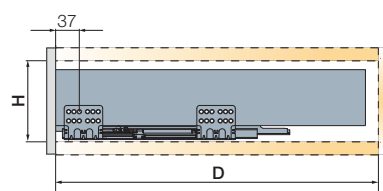


How to fix drawer sides to the front panel?

The Tekform Slimline+ drawer is available with EasyFix or screw-in front connectors




Screw-in front connector

- reliable connection
- fixing with Ø3.5x15mm screws (screws are not included)

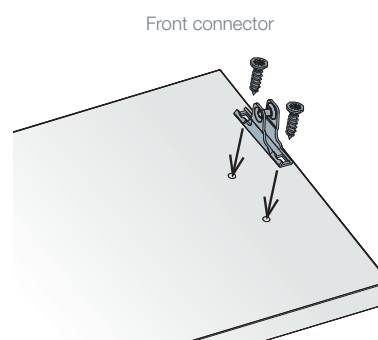

EasyFix front connector

- hand insertion
- quarter turn locking system
- expandable dowel
- easy assembly and disassembly of front panel

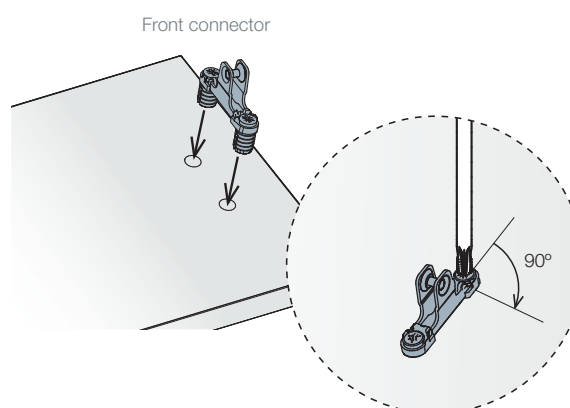

Planning

Bottom panel and back panel cutting dimensions

Dimensions of bottom and back panel depends on:

- cabinet width
- nominal drawer length
- drawer height

NL = Tekform Slimline+ drawer nominal length (mm)


NL	270	300	350	400	450	500	550
----	-----	-----	-----	-----	-----	-----	-----

Cabinet width

ECW: External cabinet width

ICW: Internal cabinet width


NL: Nominal length of drawer

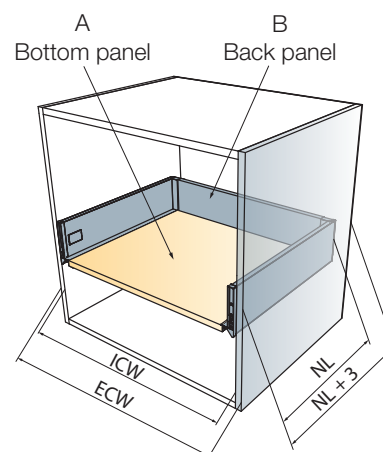


Back panel cutting dimensions

Back panel height depends on the selected drawer height

	K
DWD70	68
DWD100	100
DWD145	151
DWD182	183



Bottom panel cutting dimensions



NL	270	300	350	400	450	500	550
L	260	290	340	390	440	490	540
L_{st}	250	280	330	380	430	480	530

NL = Slimline+ drawer nominal length (mm)

L = Length in case of wood back panel

L_{st}: Length in case of steel back panel

*For drawers with steel back panel L = NL - 20

Tekform Slimline+ Drawer

Information


Technical Guide

How to choose the appropriate drawer runner fixing positions?

The drawer's fixing position depends on its functional placement.


Tekform Slimline+ drawer front positioned outside the carcass

When the drawer front is positioned outside the carcass, use the third hole on the drawer runner for fixing.

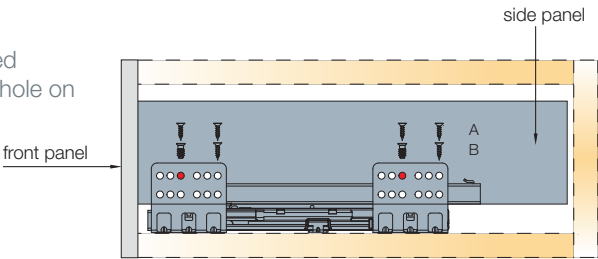


Tekform Slimline+ drawer front positioned inside the carcass

When the drawer front is positioned inside the carcass, use the second hole on the drawer runner for fixing.

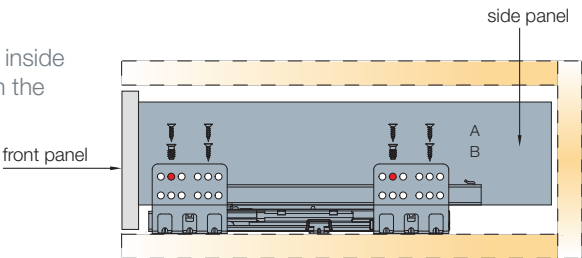

Load capacity


Drawer load capacity is 40 kg.

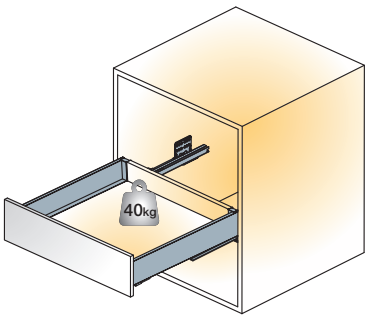

Expanded tolerances

Tekform Slimline+ drawer provides wider tolerances in cabinet construction and assures:

- precise drawer alignment
- smooth and silent operation
- improved drawer stability in open position
- Tekform Slimline+ drawer provides a tolerance of +/- 1mm on bottom panel width size






Adjustment needs to be done on both sides of the drawer

Adjustments



How to adjust the drawer front panel?

The Tekform Slimline+ drawer offers effortless three-dimensional front panel alignment, providing convenient access for side, height, and tilt adjustment positioned

at the front of the drawer side. Enhanced with colour-coded adjustment cams, for easy identification and precise alignment, guaranteeing uniform gap layouts.


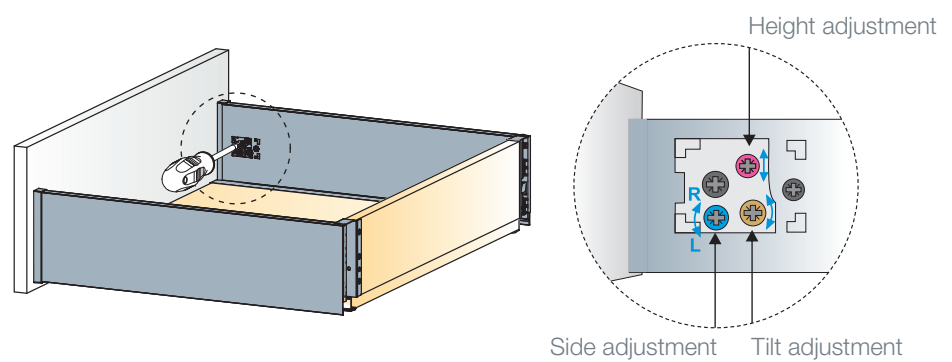


Side adjustment





Side adjustment is done by rotating the grey coloured cam adjuster on the drawer side.

Height adjustment



Height adjustment is done by rotating the red coloured cam adjuster on the drawer side.

Tilt adjustment




Tilt adjustment is done by rotating the yellow coloured cam adjuster on the drawer side.

Tekform Slimline+ Drawer Information


Key Design Choices

ConfidentClose


Fast closing



Late start of damping



Quiet landing




CAF Consumer Assembly Friendliness

EasyFix front panel connector with expandable dowels provides:


- Quick, toolless insertion
- Quarter turn lock
- Repeatable assembly and disassembly

Front connector

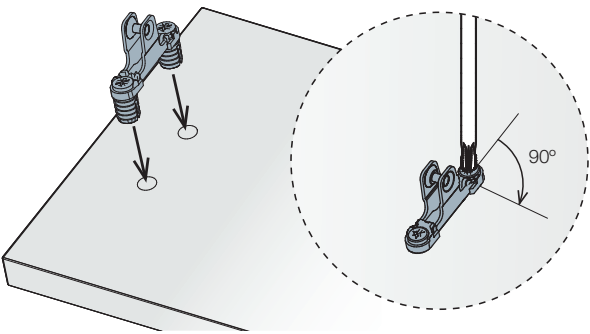

Compatible with Tacto push-opening system:

- For convenient, handle-free opening
- Same runner for both, standard and Tacto push-to-open applications
- The Tacto mechanism can be simply added as a retrofit option at any time after the drawer assembly
- For all drawers from a 300mm nominal length onwards

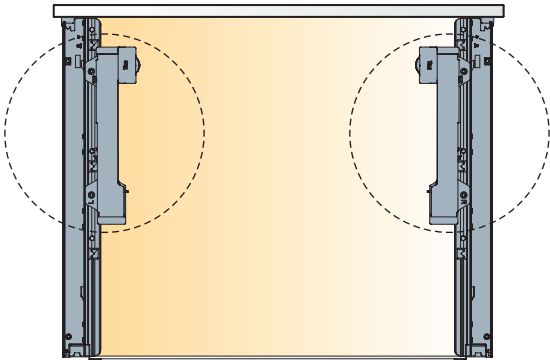

Titus Damper inside

Designed and produced in-house


- Reliable and consistent lifelong damping
- Smooth closing
- Consistent damping performance guaranteed across high-volume production runs
- 100% automated quality check



Damping action

Even and smooth soft closing action

- Soft and reliable closing

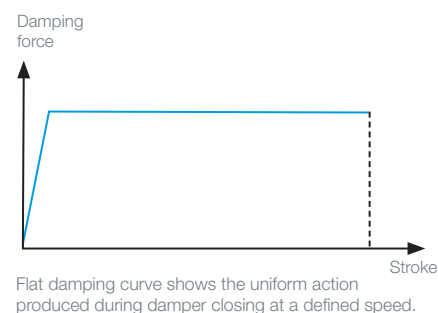

Response to speed


Response to speed defines the increase in damping force in relation to the closing speed of the damping object.

Standard




The damping force increase is approximately linear to the increasing speed of closing.

ART - Adaptive Response Technology


Adaptive Response Technology fine-tunes the damper's performance and damping force by adjusting to the drawer's weight and speed. It provides smooth and reliable damping at any closing speed, while reducing the force needed to open the drawer.

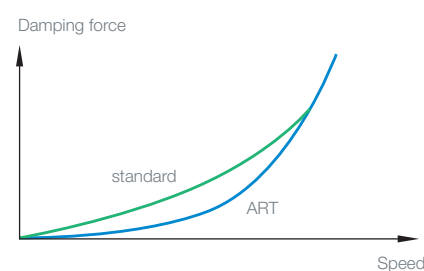


Tekform Slimline+ Drawer DW70

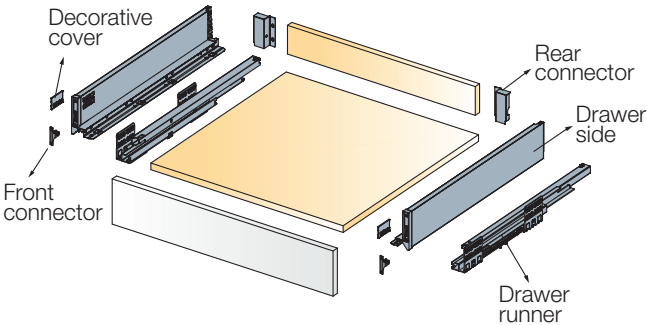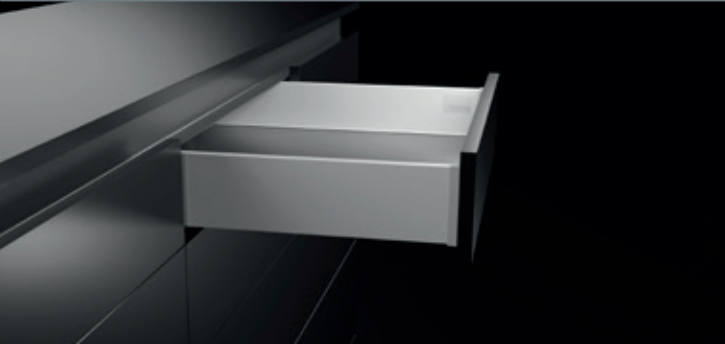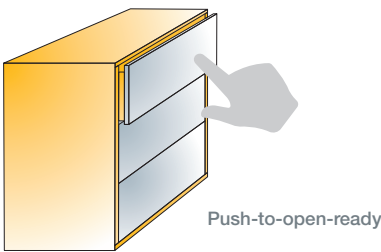

Cutting dimensions details

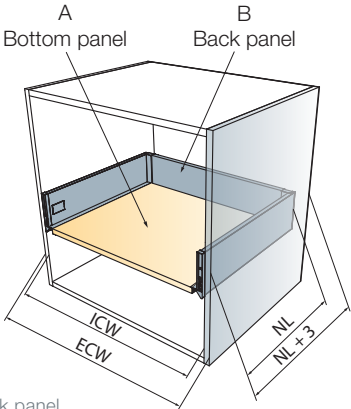

ECW: External cabinet width
ICW: Internal cabinet width
NL: Nominal length of drawer
L_{st}: Length in case of steel back panel

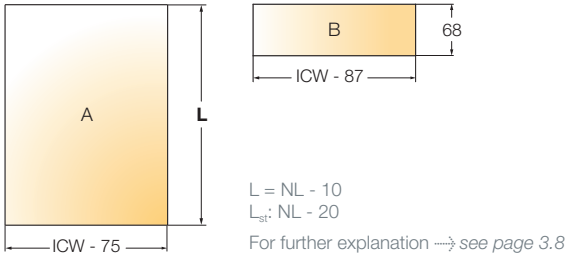

4 sets

	NL	with Screw-in front connector 		
			White	Anthracite
	Nominal length (mm)	Item number for a set		
	270	656-8352 →	150	185
	300	656-8353 →	150	185
	350	656-8354 →	150	185
	400	656-8356 →	150	185
	450	656-8357 →	150	185
	500	656-8358 →	150	185
	550	656-8359 →	150	185
One set consists of				
Drawer sides			2 pcs	
Drawer runners			2 pcs	
Front connectors			2 pcs	
Rear connectors			2 pcs	
Decorative covers			2 pcs	
Mounting instructions			1 pc/4 sets	

Push opening



Tacto Slimline Mechanism
→ see page 3.27

EasyFix front connector




656-0H66-380-00




- Drawer runner type
- Load capacity
- Minimum height space required
- Wooden back panel thickness
- Wooden bottom panel thickness


full extension
40 kg
115mm
16mm
16mm



Side
adjustment
+1.5/-1.5 mm



Height
adjustment
+1.5/-1.5 mm



Tilt
adjustment




Works with
Tacto Push Opening Mechanism
→ see page 3.27

For further explanation → see page 3.10

Installation dimensions and drillings

Drawer runner fixing positions


Front panel

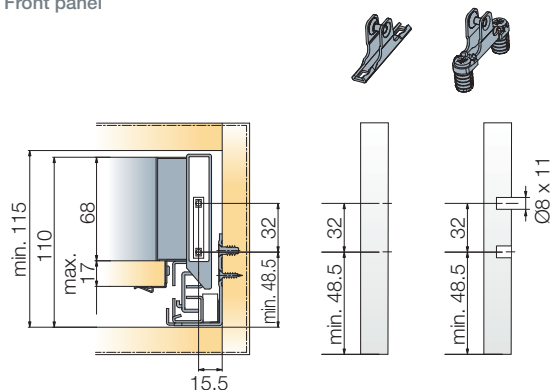


NL=270mm
NL=300mm
NL=350mm
NL=400mm
NL=450mm



Back panel





NL=500mm
NL=550mm

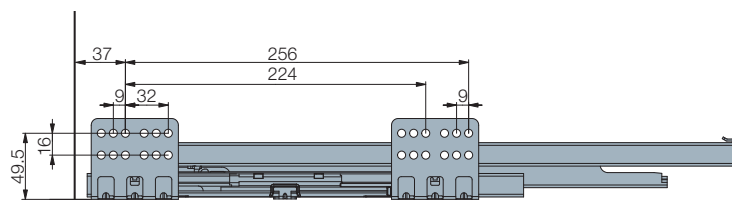



Assembly instructions, adjustments




Tekform Slimline+ Drawer DW100

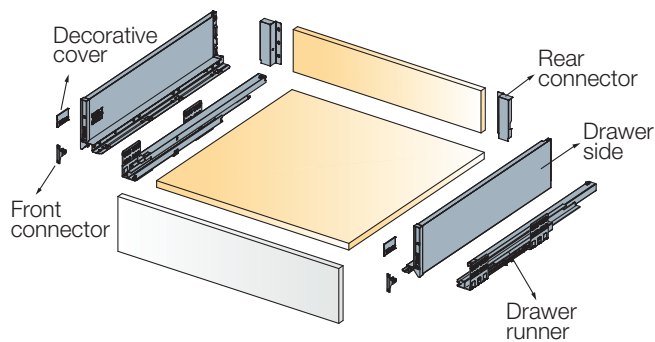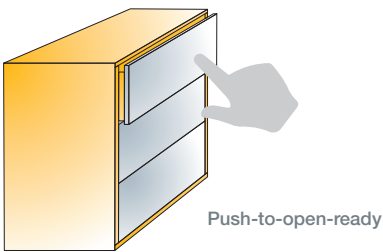

Cutting dimensions details

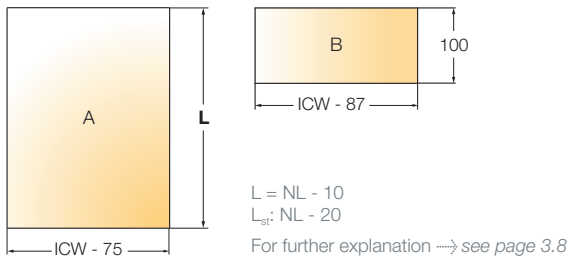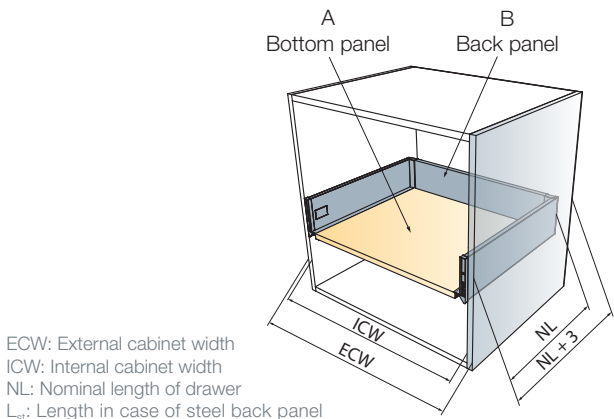

4 sets

	NL	with Screw-in front connector 		
			White	Anthracite
	Nominal length (mm)	Item number for a set		
			White	Anthracite
	270	656-8360 →	150	185
	300	656-8361 →	150	185
	350	656-8362 →	150	185
	400	656-8363 →	150	185
	450	656-8364 →	150	185
	500	656-8365 →	150	185
	550	656-8366 →	150	185
One set consists of				
Drawer sides			2 pcs	
Drawer runners			2 pcs	
Front connectors			2 pcs	
Rear connectors			2 pcs	
Decorative covers			2 pcs	
Mounting instructions			1 pc/4 sets	

Push opening



Tacto Slimline Mechanism
→ see page 3.27

EasyFix front connector




656-0H66-380-00


400 Pcs

- Drawer runner type
- Load capacity
- Minimum height per drawer required
- Wooden back panel thickness
- Wooden bottom panel thickness


full extension
40 kg
147mm
16mm
16mm



Side
adjustment
+1.5/-1.5 mm



Height
adjustment
+1.5/-1.5 mm



Tilt
adjustment




Works with
Tacto Push Opening Mechanism
→ see page 3.27

For further explanation → see page 3.10

Installation dimensions and drillings

Drawer runner fixing positions


Front panel

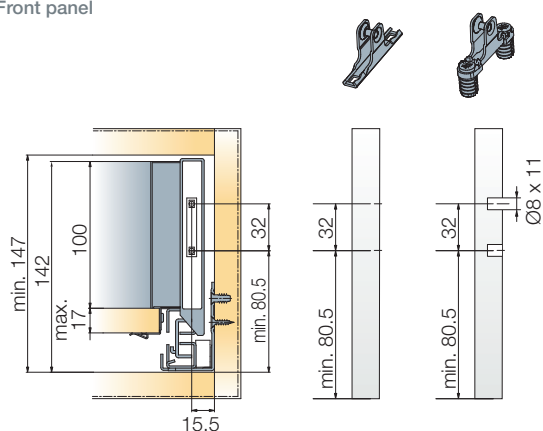


NL=270mm
NL=300mm
NL=350mm
NL=400mm
NL=450mm



Back panel





NL=500mm
NL=550mm

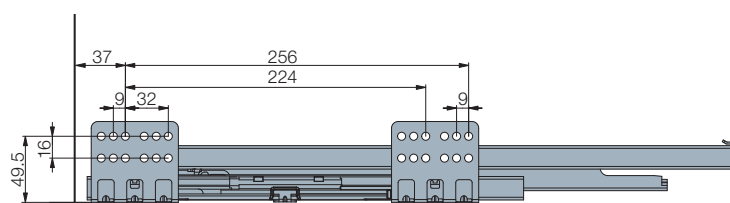



Assembly instructions, adjustments




Tekform Slimline+ Drawer DW145

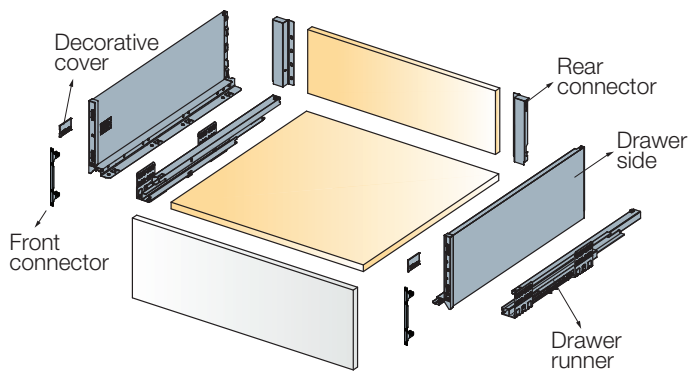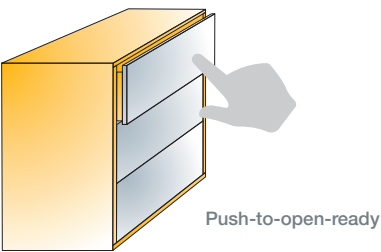

Cutting dimensions details

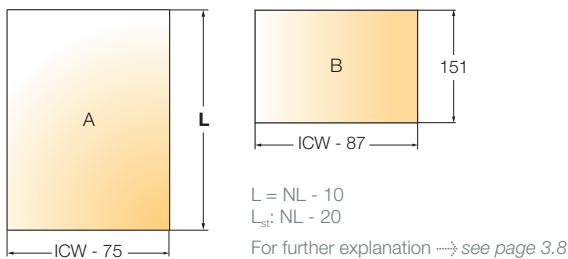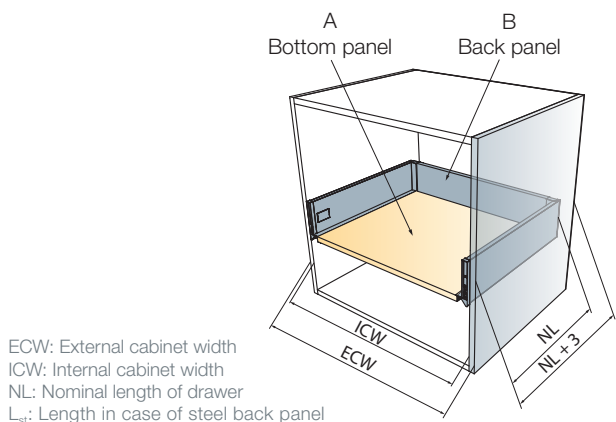


	NL	with Screw-in front connector		
	Nominal length (mm)		White	Anthracite
		Item number for a set		
	270	656-8367 →	150	185
	300	656-8368 →	150	185
	350	656-8369 →	150	185
	400	656-8370 →	150	185
	450	656-8371 →	150	185
	500	656-8372 →	150	185
	550	656-8373 →	150	185
One set consists of				
Drawer sides		 2 pcs		
Drawer runners		 2 pcs		
Front connectors		 2 pcs		
Rear connectors		 2 pcs		
Decorative covers		 2 pcs		
Mounting instructions		 1 pc/4 sets		




- Drawer runner type
- Load capacity
- Minimum height per drawer required
- Wooden back panel thickness
- Wooden bottom panel thickness


full extension
40 kg
198mm
16mm
16mm



Side
adjustment
+1.5/-1.5 mm



Height
adjustment
+1.5/-1.5 mm



Tilt
adjustment




Works with
Tacto Push Opening Mechanism
→ see page 3.27

For further explanation → see page 3.10

Installation dimensions and drillings


Drawer runner fixing positions

Front panel

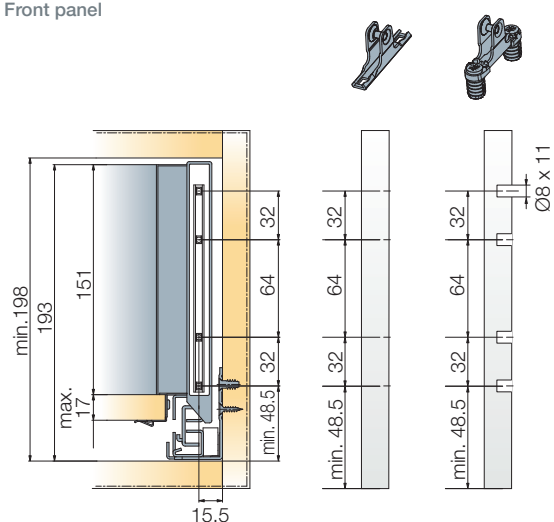



Chipboard screw
Ø3.5 x 15
Eurocrew
Ø6.3 x 13

NL=270mm
NL=300mm
NL=350mm
NL=400mm
NL=450mm

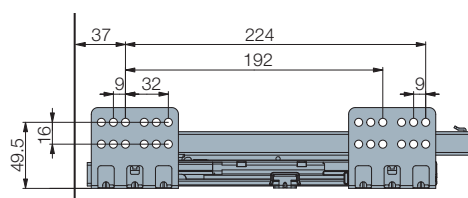

NL=500mm
NL=550mm

Back panel

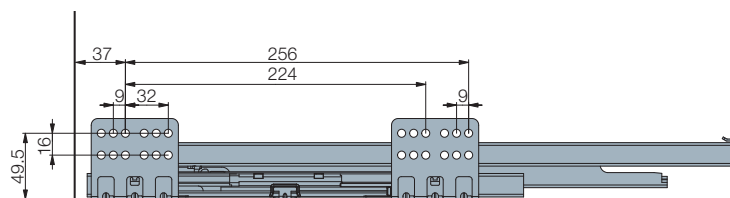
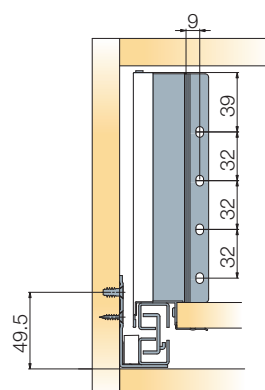


Assembly instructions, adjustments





A trial mounting is always recommended.
For further information please contact your
Titus Group representative.


Tekform Slimline+ Drawer DW182

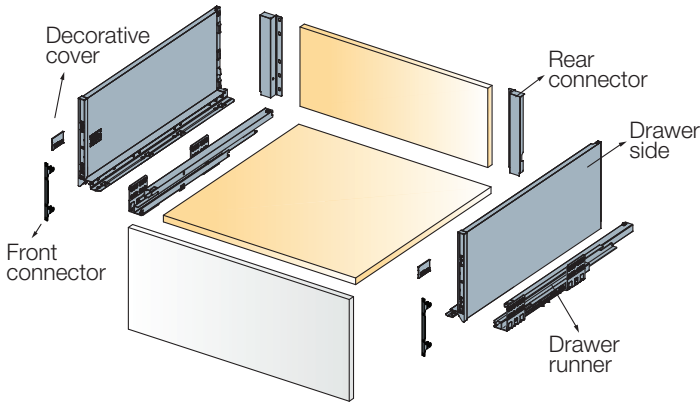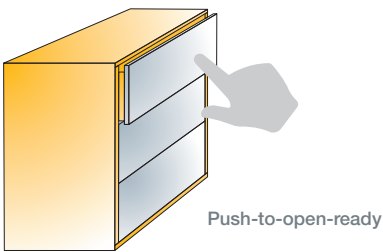

Cutting dimensions details

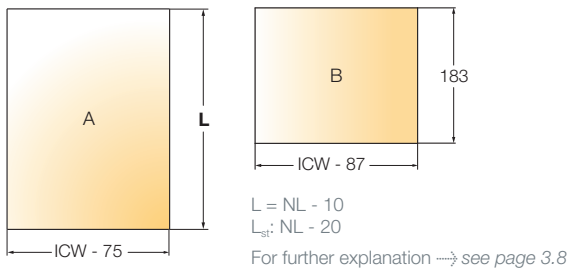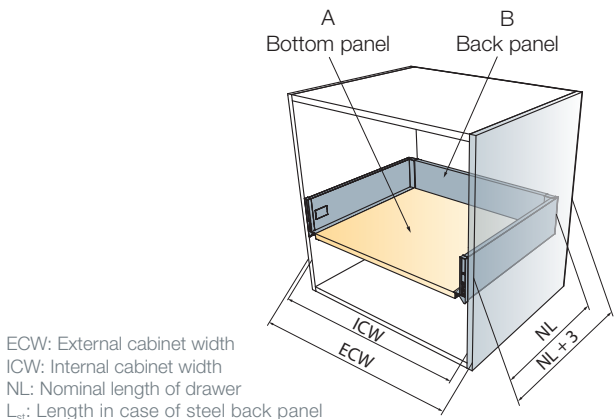


NL	with Screw-in front connector	Nominal length (mm)	Item number for a set	White	Anthracite
270	656-8374 →	150	185		
300	656-8375 →	150	185		
350	656-8376 →	150	185		
400	656-8377 →	150	185		
450	656-8378 →	150	185		
500	656-8379 →	150	185		
550	656-8380 →	150	185		
One set consists of					
Drawer sides				2 pcs	
Drawer runners				2 pcs	
Front connectors				2 pcs	
Rear connectors				2 pcs	
Decorative covers				2 pcs	
Mounting instructions				1 pc/4 sets	




- Drawer runner type
- Load capacity
- Minimum height per drawer required
- Wooden back panel thickness
- Wooden bottom panel thickness


full extension
40kg
230mm
16mm
16mm



Side
adjustment
+1.5/-1.5 mm



Height
adjustment
+1.5/-1.5 mm



Tilt
adjustment




Works with
Tacto Push Opening Mechanism
→ see page 3.27

For further explanation → see page 3.10


Installation dimensions and drillings

Drawer runner fixing positions

Front panel


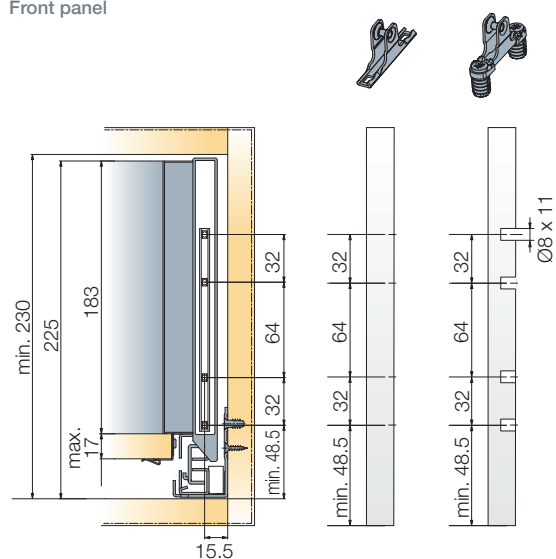


NL=270mm
NL=300mm
NL=350mm
NL=400mm
NL=450mm

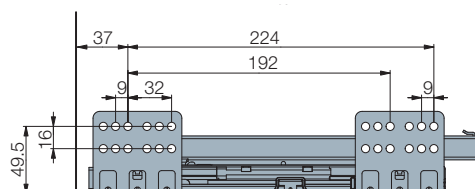

NL=500mm
NL=550mm


Back panel

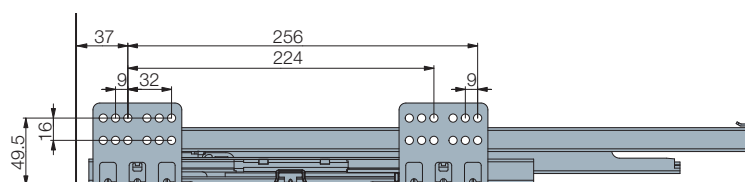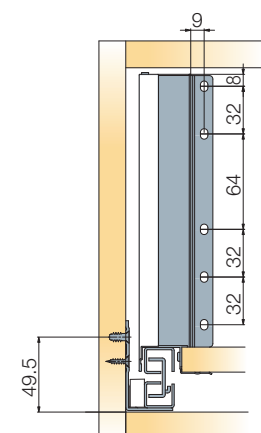


Assembly instructions, adjustments



Inner Drawer Front for Tekform Slimline+ Drawer DW70



Front panel



Cutting dimension L = ICW-105
ICW → see page 3.22



20 pcs

Made of aluminium



Front bracket



50 sets

Made of aluminium and plastic

External cabinet width	Item number		
		White	Antracite grey
600	656-8048 →	511	515
1200	656-8053 →	511	515
	656-8334 →	350	385

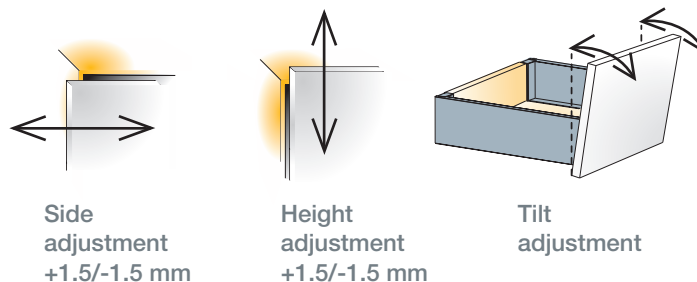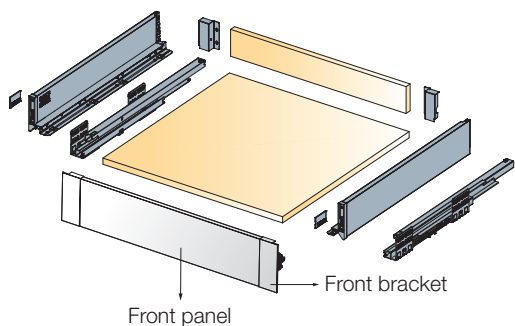


For further explanation → see page 3.10


Installation dimensions

Drawer runner fixing positions


Cutting dimensions details

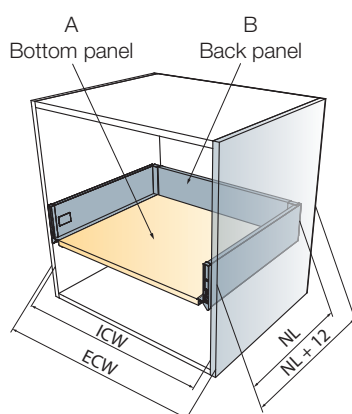


ECW: External cabinet width
ICW: Internal cabinet width
NL: Nominal length of drawer



NL=270mm
NL=300mm
NL=350mm
NL=400mm
NL=450mm

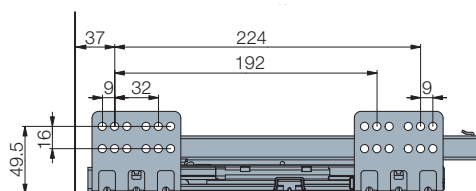


NL=500mm
NL=550mm

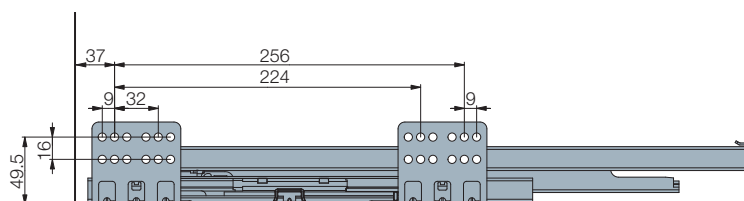


Assembly instructions, adjustments



Inner Drawer Front for Tekform Slimline+ Drawer DW145 with Bar



Front bar




Cutting dimension L = ICW-94
ICW → see page 3.24



50 pcs

Made of aluminium

Front panel



Cutting dimension L = ICW-105
ICW → see page 3.24



20 pcs

Made of aluminium



Front bracket



20 pcs

Made of aluminium and plastic

ECW			
External cabinet width	Item number	White	Antracite grey
600	656-8126 →	511	515
1200	656-8132 →	511	515
600	656-8048 →	511	515
1200	656-8053 →	511	515
	656-8337 →	350	385

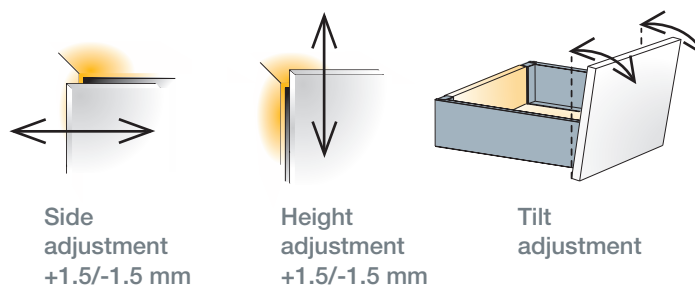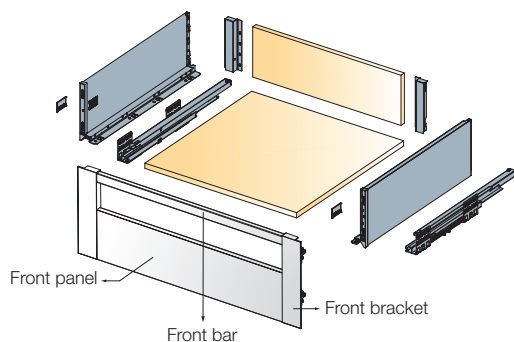


For further explanation → see page 3.10


Installation dimensions

Drawer runner fixing positions


Cutting dimensions details

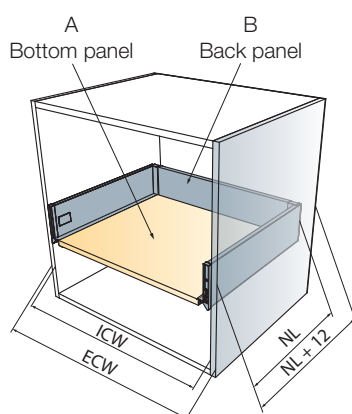


ECW: External cabinet width
ICW: Internal cabinet width
NL: Nominal length of drawer



NL=270mm
NL=300mm
NL=350mm
NL=400mm
NL=450mm

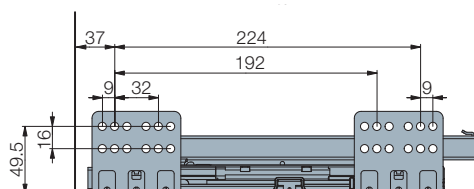


NL=500mm
NL=550mm

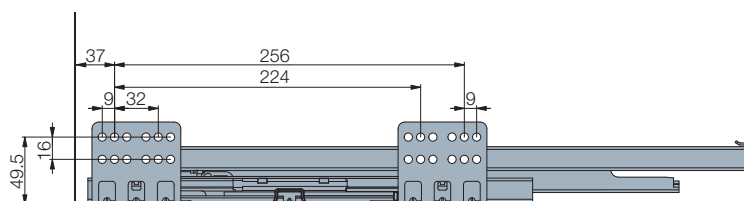

Assembly instructions, adjustments



Inner Drawer Front for Tekform Slimline+ Drawer DW182 with Bar



Front bar




Cutting dimension L = ICW-94
ICW → see page 3.26



50 pcs

Made of aluminium and plastic

Front panel



Cutting dimension L = ICW-105
ICW → see page 3.26



20 pcs

Made of aluminium



Front bracket



20 sets

Made of aluminium and plastic

ECW	External cabinet width	Item number		
			White	Antracite grey
600	656-8126 →	511	515	
1200	656-8132 →	511	515	
600	656-8048 →	511	515	
1200	656-8053 →	511	515	
	656-8341 →	350	385	

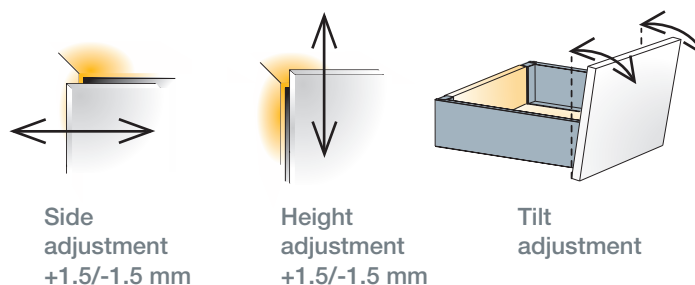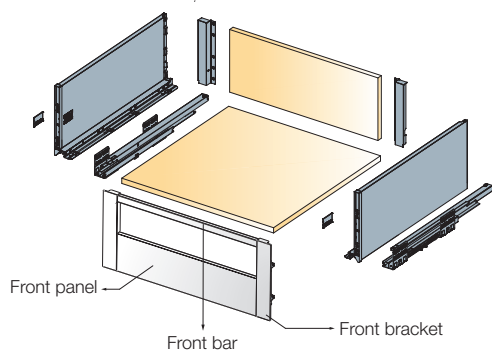


For further explanation → see page 3.10


Installation dimensions

Drawer runner fixing positions


Cutting dimensions details

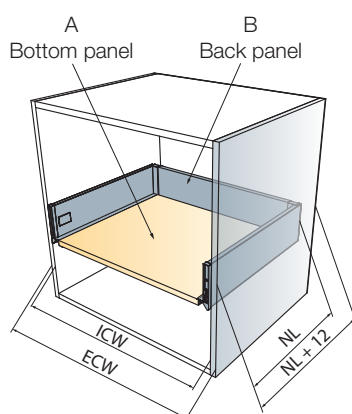


ECW: External cabinet width
ICW: Internal cabinet width
NL: Nominal length of drawer



NL=270mm
NL=300mm
NL=350mm
NL=400mm
NL=450mm

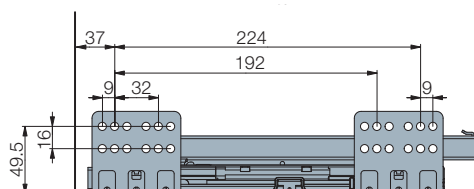

NL=500mm
NL=550mm

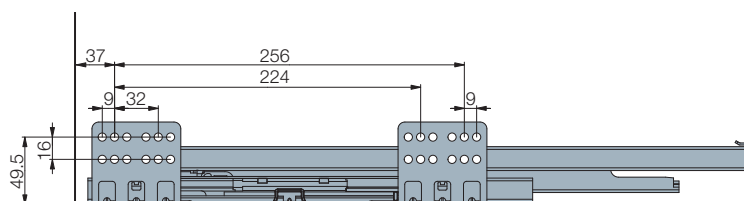


Assembly instructions, adjustments




TouchControl Solutions

Tacto 2.0

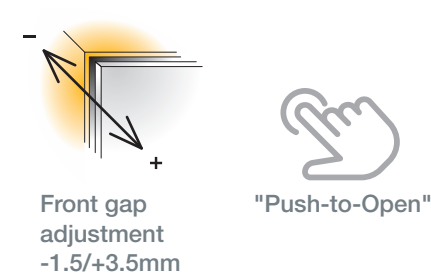

- Intuitive mounting
- One-for-all – One item fits all Slimline+ drawers from NL=300mm
- Easily adjustable push-to-open activation with only 1.5mm gap to operate
- Easy opening, reliable closing

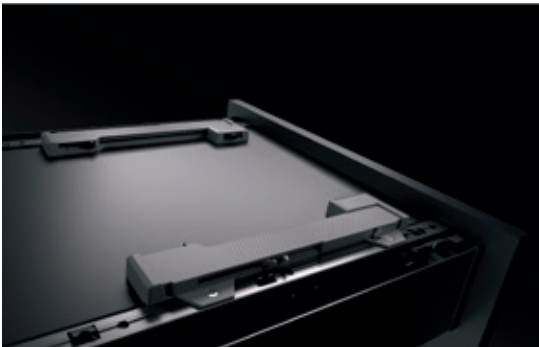


Tacto 2.0

Technical details

Item number for set

656-9220-383-K1

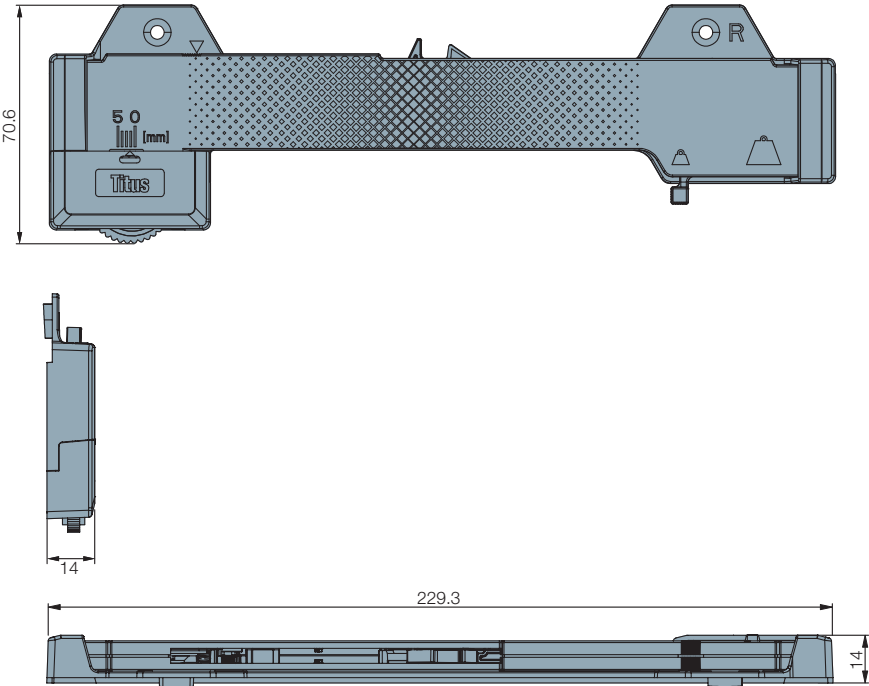

One set consists of

PushOpen Mechanism



2 pcs

Tacto Activator



2 pcs

Chipboard screws



4 pcs/set

Mounting instructions



1 pc/set

Assembly instructions, adjustments




30 sets





Made of plastic

Accessories

Marking Jig






Tekform Slimline+ Drawer

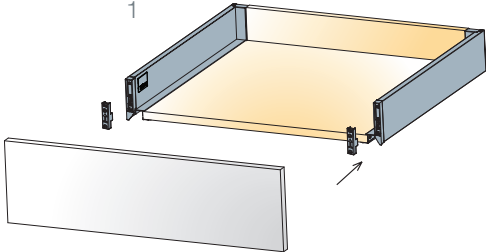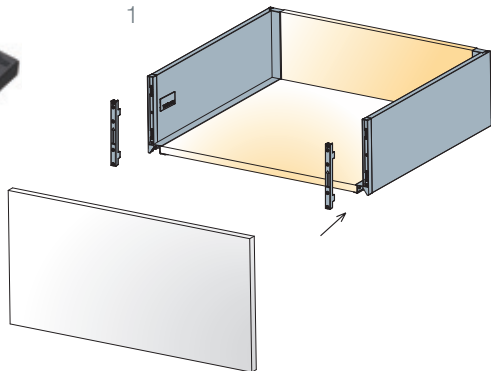

		Item number	Black
Marking jig for Tekform Slimline+ drawer DW70 and DW100		656-9339	390
 1  2 			
 1 set Made of plastic and steel			
Marking jig for Tekform Slimline+ drawer DW145 and DW182		656-9340	390
 1  2 			
 1 set Made of plastic and steel			

Accessories

Steel Back Panel


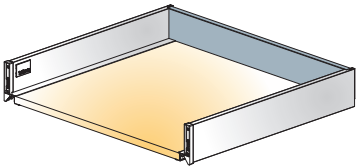


	ECW	Cabinet side thickness 16mm	Cabinet side thickness 18mm		
	External cabinet width (mm)			White	Anthracite
Steel back panel DW70 	300	655-7L01	655-7L30	150	185
	400	655-7L02	655-7L40	150	185
	500	655-7L03	655-7L50	150	185
	600	655-7L04	655-7L60	150	185
	700	655-7L05	655-7L70	150	185
	800	655-7L06	655-7L80	150	185
	900	655-7L07	655-7L90	150	185
	1000	655-7L08	655-7L10	150	185
	1200	655-7L09	655-7L12	150	185
 10 pcs Made of steel					
Steel back panel DW100 	300	655-7F01	655-7F30	150	185
	400	655-7F02	655-7F40	150	185
	500	655-7F03	655-7F50	150	185
	600	655-7F04	655-7F60	150	185
	700	655-7F05	655-7F70	150	185
	800	655-7F06	655-7F80	150	185
	900	655-7F07	655-7F90	150	185
	1000	655-7F08	655-7F10	150	185
	1200	655-7F09	655-7F12	150	185
 10 pcs Made of steel					


	ECW	Cabinet side thickness 16mm	Cabinet side thickness 18mm		
	External cabinet width (mm)			White	Anthracite
Steel back panel DW145 	300	655-7M01	655-7M30	150	185
	400	655-7M02	655-7M40	150	185
	500	655-7M03	655-7M50	150	185
	600	655-7M04	655-7M60	150	185
	700	655-7M05	655-7M70	150	185
	800	655-7M06	655-7M80	150	185
	900	655-7M07	655-7M90	150	185
	1000	655-7M08	655-7M10	150	185
	1200	655-7M09	655-7M12	150	185
 10 pcs Made of steel					
Steel back panel DW182 	300	655-7H01	655-7H30	150	185
	400	655-7H02	655-7H40	150	185
	500	655-7H03	655-7H50	150	185
	600	655-7H04	655-7H60	150	185
	700	655-7H05	655-7H70	150	185
	800	655-7H06	655-7H80	150	185
	900	655-7H07	655-7H90	150	185
	1000	655-7H08	655-7H10	150	185
	1200	655-7H09	655-7H12	150	185
 10 pcs Made of steel					

Tekform Slimline DW45


Shallow Drawer

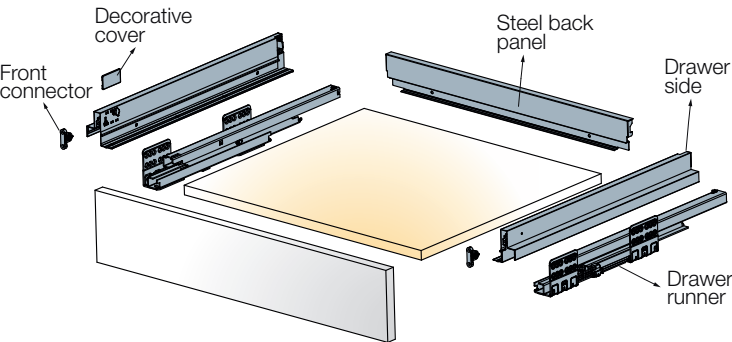

Cutting dimensions details

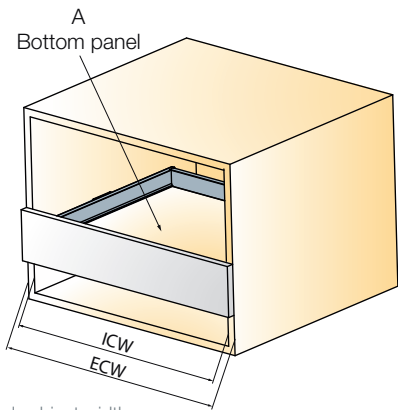

ECW: External cabinet width
 ICW: Internal cabinet width
 NL: Nominal length of drawer
 L_{st}: Length in case of steel back panel



L_{st}: NL - 20
 For further explanation
 → see page 3.8

NL	with Screw-in front connector		
Nominal length (mm)		White	Anthracite
	Item number for a set		
450	655-8046	150	185
500	655-8047	150	185
To be ordered separately Steel back panel			
600*	655-7273	150	185
* cabinet side thickness 18mm			
One set consists of			
Drawer sides		2 pcs	
Drawer runners		2 pcs	
*Front connectors		2 pcs	
Covers		2 pcs	
Mounting instructions		1 pc/4 sets	

Screws are not included

- Drawer runner type
- Load capacity
- Minimum height space required
- Back panel
- Wooden bottom panel thickness

full extension
40 kg
76mm
steel
16mm




Side
adjustment
+1/-1mm


i Works with or without
Tacto Mechanism

Installation dimensions

Minimum space required for the
cabinet


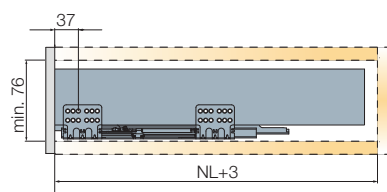


Drawer runner fixing positions

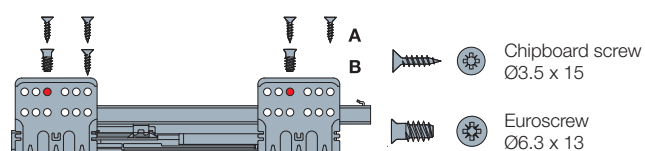

Drilling dimensions for the front panel

Screw-in attachment

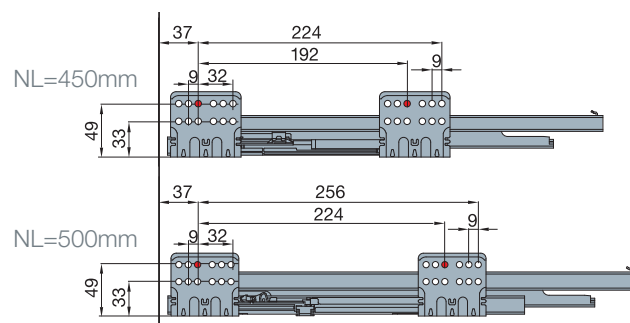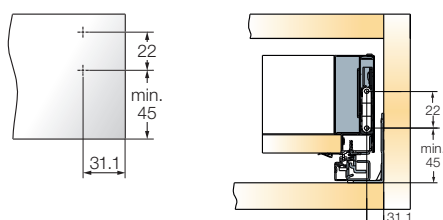


Soft Closing Systems for Doors and Drawers

Soft Closing Systems for Doors and Drawers




Titus Damper Inside

- Smooth and even soft closing action on various door dimensions and weights
- Silent closing without a rebound
- Consistent performance in hot/cold environment




Titussoft for drawers

- For metal box and roller runners



Simple and intuitive mounting

- No pre-drilling required
- Non-handed
- User friendly



Set 200s

- Reliable damping for bottom running sliding doors in two- and three-door wardrobes
- Quick, intuitive installation without the need for pre-drilling



Comfortable door opening

- Low pull-open force
- Effortless opening




Fully controllable damping curve

- Ability to fine tune performance to specific applications
- Precise definition of forces over the whole damping action

Titusoft WD

Soft Closing System for Wooden Drawer


For wooden drawer
with roller runners



		Technical details		Item number		Grey	White
Titusoft WD		Titusoft mechanism	973-0X35 →	380			
		Activator	973-4451 →	380	350		
		Bag of 1 973-0X35-380-K2 120 Bags · 1 Titusoft mechanism · 1 activator · 2 screws Ø3.5mm x 20mm · 2 screws Ø3.5mm x 12mm · 1 mounting instruction sheet Bag of 2 973-0X35-380-K1 80 Bags · 2 Titusoft mechanisms · 2 activators · 4 screws Ø3.5mm x 20mm · 4 screws Ø3.5mm x 12mm · 1 mounting instruction sheet					
Titusoft mechanism							
Activator							
		250 Pcs					
		200 Pcs (973-0X35 + activator)					
		Made of plastic					

- Works with most roller runner drawer slides
- Easy, intuitive mounting
- Smooth, soft closing action independent of drawer hardware
- Optimal closing speed
- Non-handed design


Capacity chart

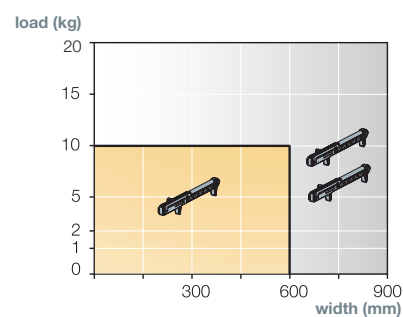

Mount 1 or 2 Titusoft mechanisms depending on drawer weight and width


Mounting details

1.




Position the Titusoft mechanism on the top of the drawer slide

2.

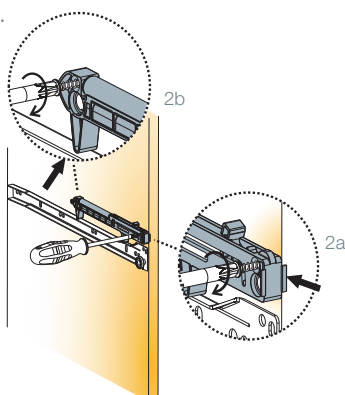


Fix with 2 screws L=20mm

3.

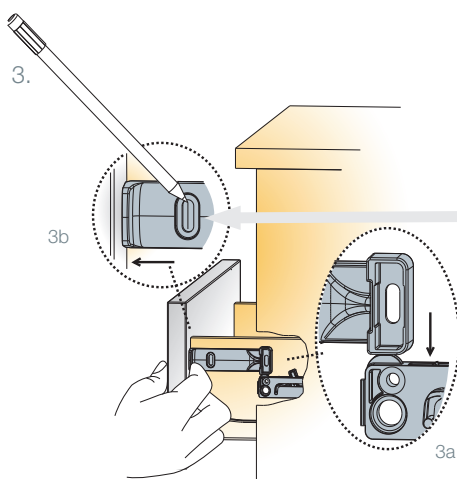

1. Rest the activator against the drawer front
2. Align the vertical position of the activator with the top of the Titusoft mechanism and mark the screw locations

4.

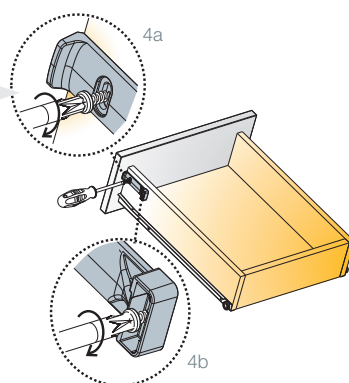



Fix with 2 screws L=12mm

A trial mounting is always recommended. Please contact Titus Group or your local distributor for further technical assistance.

Titusoft MD

Soft Closing System for Metal Box

For metal boxes

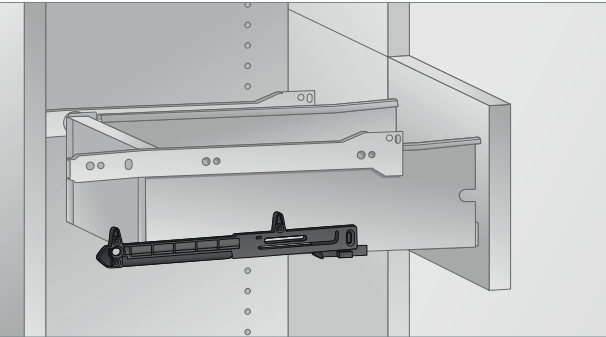

Titusoft MD



Titusoft mechanism



Activator




Mounting jig


 250 Pcs
150 Pcs (973-0X39 + activator) Made of plastic

Technical details

Retrofit mounting

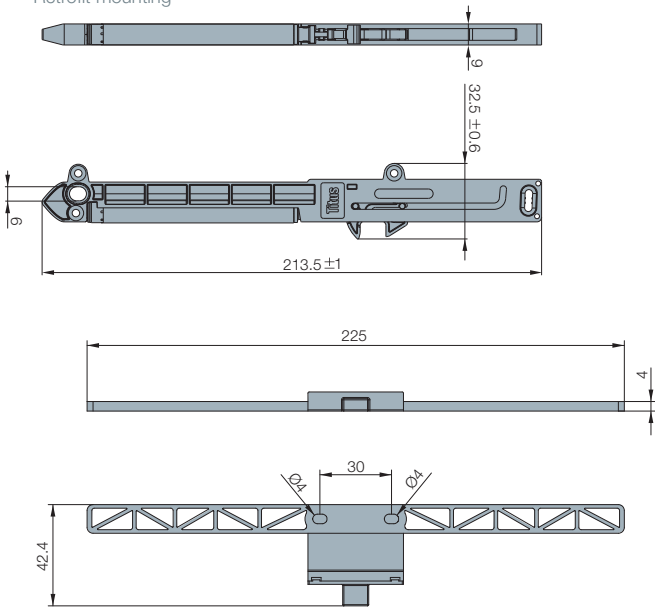

Factory mounting (system holes)

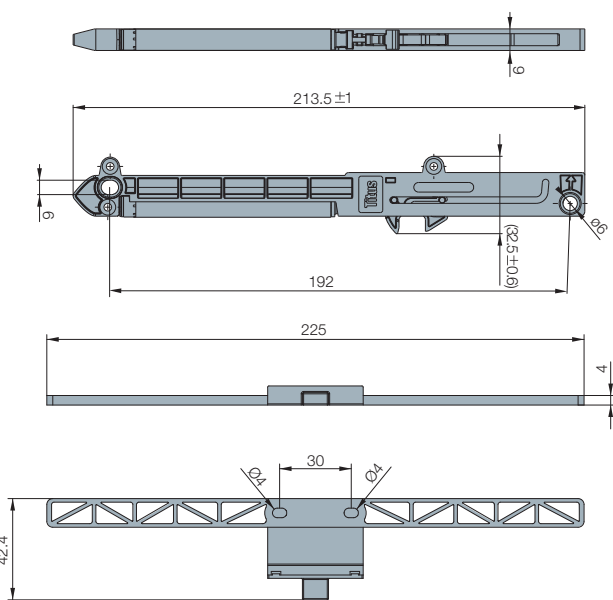

Item number

Titusoft mechanism
for factory mounting

973-0X95 →

380

Titusoft mechanism
for retrofit mounting

973-0X39 →

380

309

Activator

973-4125 →

350

Mounting jig

973-4126 →

Bag of 1

973-0X39-380-K2  90 Bags

- 1 Titusoft mechanism
- 1 activator
- 1 mounting jig
- 4 screws
- 1 mounting instruction sheet


Bag of 2

973-0X39-380-K1  60 Bags

- 2 Titusoft mechanisms
- 2 activators
- 1 mounting jig
- 8 screws
- 1 mounting instruction sheet


- One-for-all soft closing for single skin metal boxes
- Allows for easy factory mounting or retrofit application
- Intuitive positioning
- Preserve the life-time of the drawer

Capacity chart

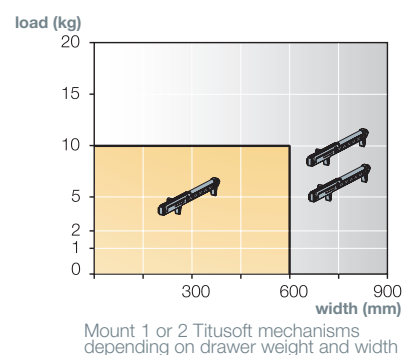


Mounting details

Retrofit mounting

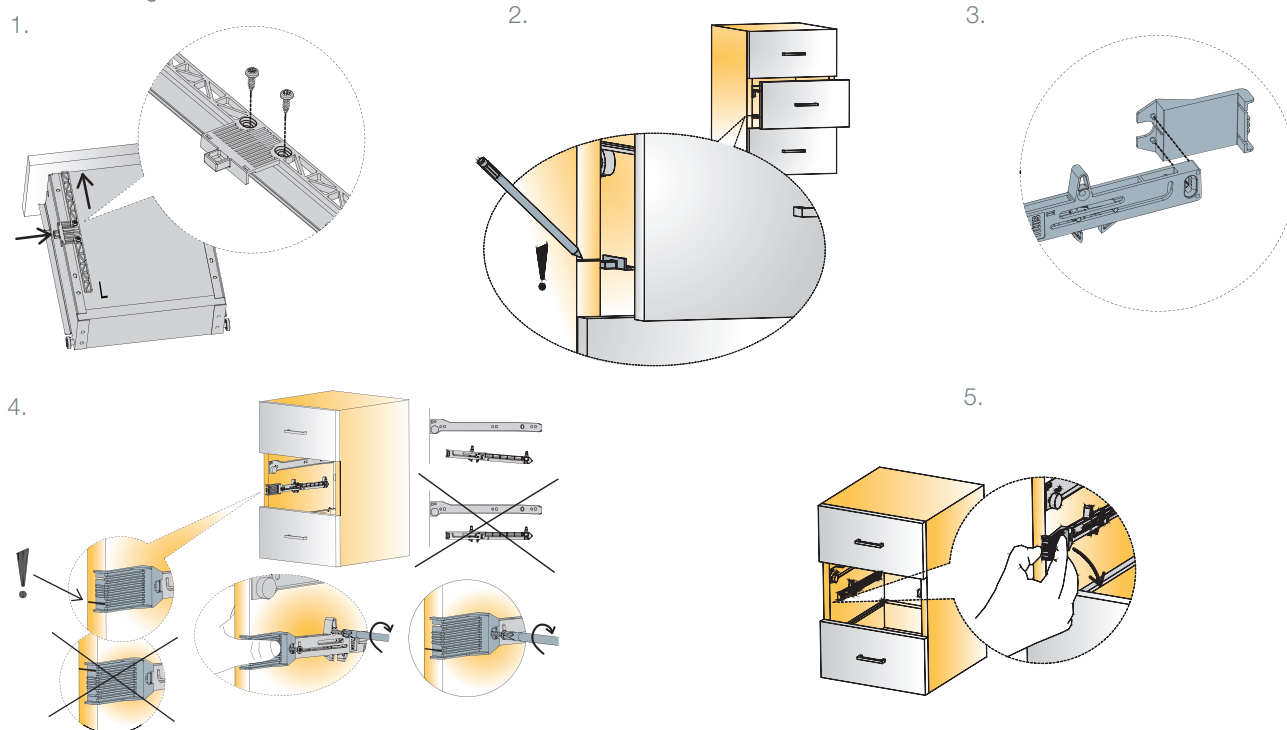

Factory mounting


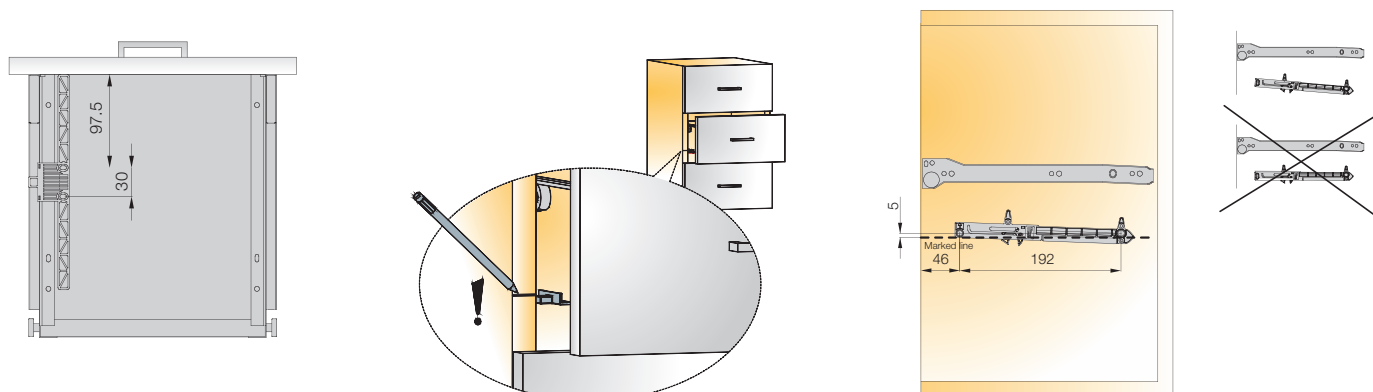


A trial mounting is always recommended. Please contact Titus Group or your local distributor for further technical assistance.

Titusoft FF

Soft Closing System for Face Frame Cabinets with Wooden Drawer

For wooden drawer
with roller runners

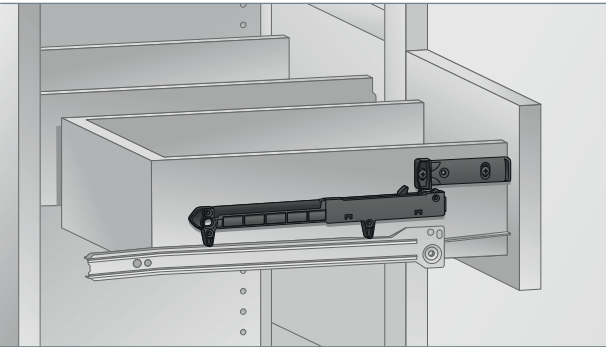

Technical details

Item number

Grey

White

Titusoft FF

Titusoft
mechanism

973-0M99 →

380

Activator


973-4451 →

380


350



Titusoft mechanism

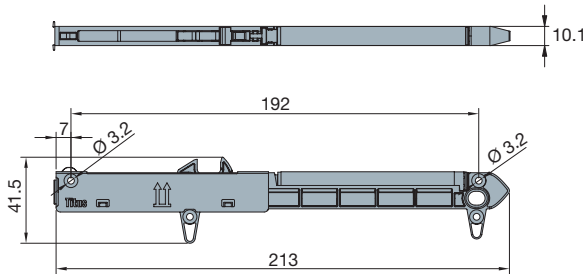

Activator



Bag of 1

973-0M99-380-K1  300 Bags


- 1 Titusoft mechanism
- 1 activator grey
- 2 screws Ø3.5mm x 25mm
- 2 screws Ø3.5mm x 12mm
- 1 mounting instruction sheet



250 Pcs

Made of plastic


- Works with most roller runner drawer slides
- Easy, intuitive mounting
- Smooth, soft closing action independent of drawer hardware
- Non-handed design

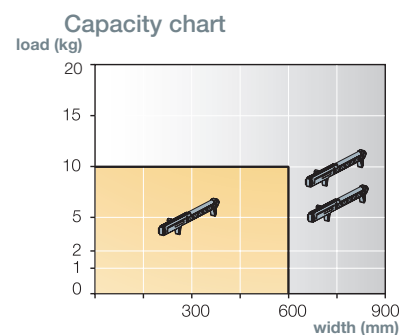

Mount 1 or 2 Titusoft mechanisms depending on drawer weight and width


Mounting details

1.

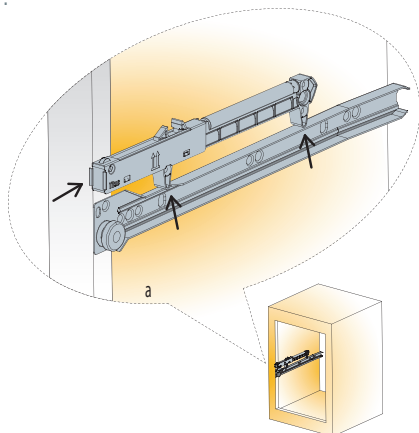


Position the Titusoft on the top of a drawer slide

2.




Screw the Titusoft mechanism to the face frame

3.

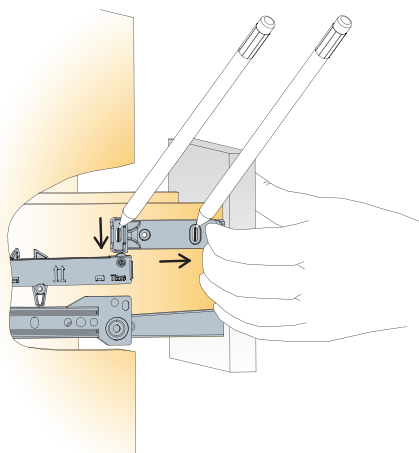

Align the activator with the top of the Titusoft mechanism and fix with two screws

4.

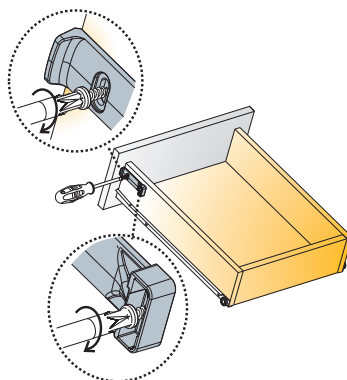



Fix with 2 (3) screws L=12mm

A trial mounting is always recommended. Please contact Titus Group or your local distributor for further technical assistance.

Set 200s

Sliding Door Mechanism

For bottom running sliding door systems

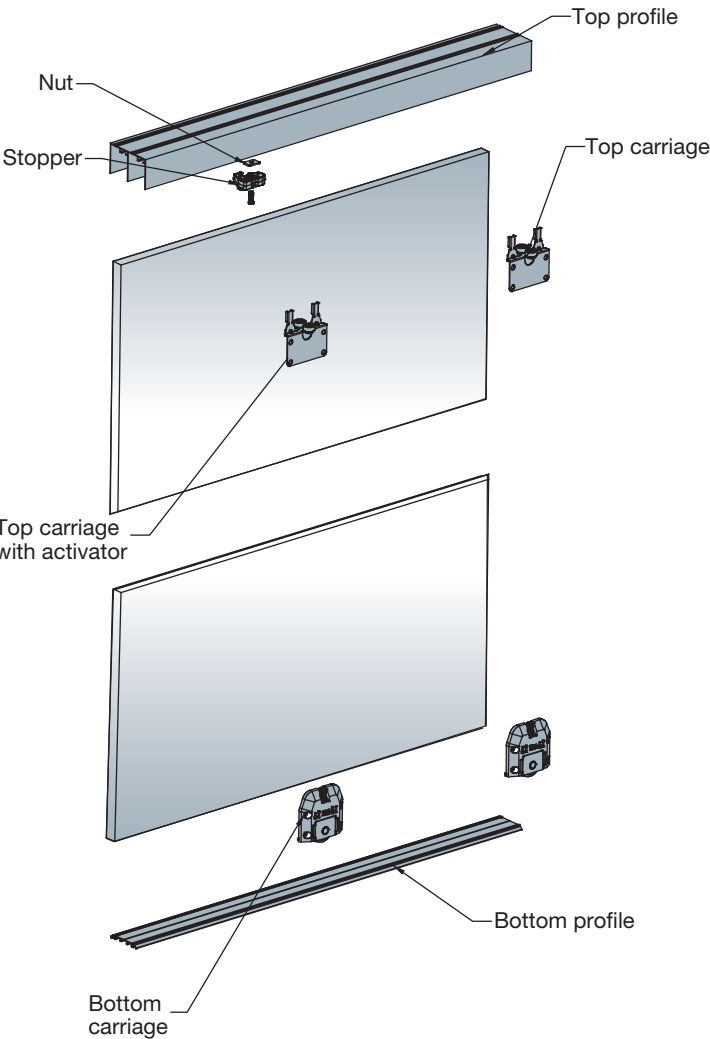

-  20 sets (610-9099-040-K1)
-  15 sets (610-9099-040-K2)

i Rails and accessories are not included in the set. Please order separately!

Rails



Top rail



Bottom rail

Accessories




Slidix Soft Closing System

Item number for set	Set for 2-doors	Set for 3-doors
610-9099-040 	K1	K2
Set consists of the following components		
Bottom carriages 	4 pcs	6 pcs
Top carriage 	2 pcs + 2 pcs	3 pcs + 3 pcs
Stopper 	4 pcs	6 pcs + 1 pcs
Slot nut 	4 pcs	8 pcs
Screw M4 x 16 	4 pcs	8 pcs
Pan head screw 	32 pcs	48 pcs
Self adhesive tape	5 pcs	5 pcs
Mounting instructions 	1 pc	1 pc


- Door weight max. 50kg
- Door thickness 18-23mm
- Door material wood (chipboard, MDF, solid wood)

Door adjustment



Height adjustment
-0/+10mm


Mounting details

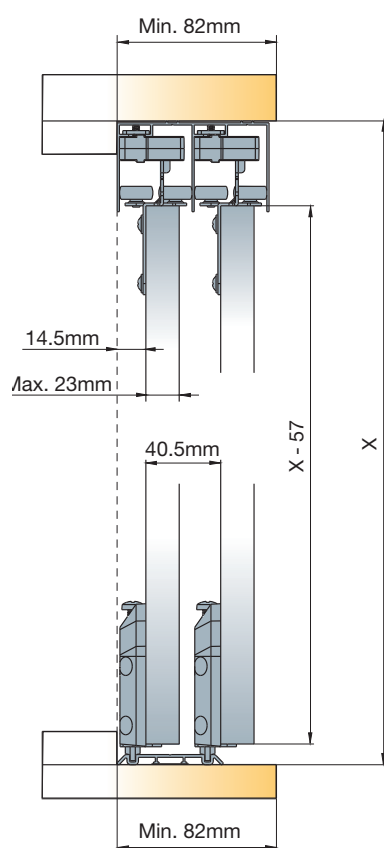


X = space available between
top and bottom panel
X - 57 = door height

Technical details

Top and bottom carriage drilling positions

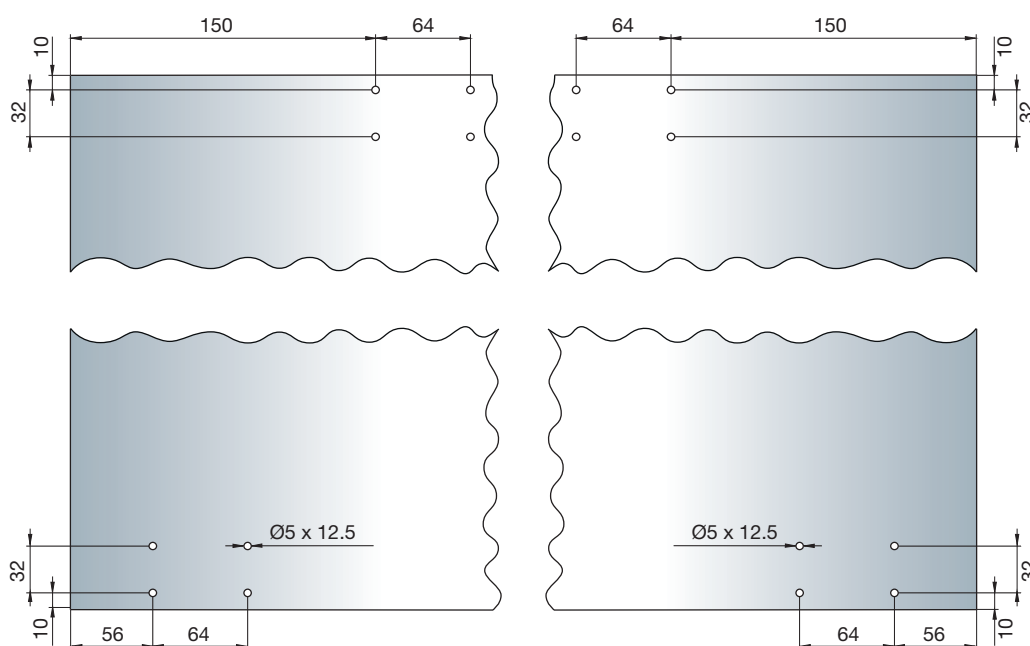

Height adjustment

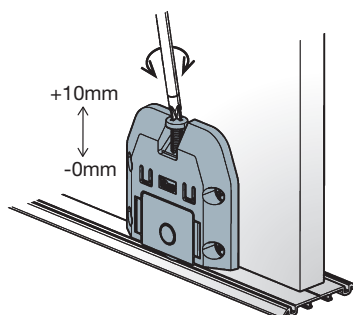



Bottom carriage is factory preset to the lowest value.

Rails

For Set 200



Screws for top rail are not supplied and depend on the application (cabinet, built-in cabinet).
Bottom rail is fixed with self-adhesive tape.
Rail is pre-drilled and ready to install.

Technical details		Rail lenght	Item number
Top rail	 	2000	610-9103-070-K1
		2400	610-9106-070-K1
		3000	610-9109-070-K1
		*other lenghts upon special request	
Set consists of:			
Top rail		1 pc	
Bottom rail		1 pc	
			

 5 sets

 5 sets

Soft Closing Systems

 20 sets (610-9196-380-K2)

 26 sets (610-9196-380-K3)

Titus Group

Products. People. Relationships.

We are proud to support furniture manufacturers, designers, distributors and OEM partners worldwide with solutions that are precise, reliable and simple to work with.

From our engineering centres to your production line, and from first contact to long-term support, we're here to help you build better – with less complexity, more clarity, and total confidence.

Titus Group designs and manufactures precision-engineered components that simplify furniture assembly, improve functionality, and ensure long-term reliability. Our core solutions – including connectors, hinges, dampers, soft-close systems, and drawer technologies – are trusted by manufacturers across a wide range of industries, from furniture and kitchens to home appliances and beyond.

With engineering, manufacturing, and customer support facilities across **Europe, Asia, North America, and Australasia**, we combine global consistency with local responsiveness.

Our vertically integrated operations support fast development, reliable delivery, and consistently high quality across markets.

For decades, we have been driven by a clear principle: **Engineered for Purpose**. This defines how we design, how we manufacture, and how we collaborate with our partners. Through **engineering simplicity**, we help our customers work more efficiently, reduce complexity, and bring better products to market – with confidence and consistency.

1973

Titus established

1975

Revolution in particleboard panel processing productivity

1977

Titus launches concealed cabinet connector

1980

Titus USA office and manufacturing established

1990

Launch of innovative Quickfit technology

2005

Titusonic ultrasound fastening technology introduced

2006

Merger with Lama d.d.
Launch of Glissando

2007

Titus becomes Titus+
Specialist in precision components engineering

2009

Damper development and engineering

2014

Acquisition of Tekform, Australia

2017

Launch of T-type full hinge programme

2019

Launch of TeraBlack product range

2020

Acquisition of Simon Kinetics, Germany

2022

Acquisition of Titus Precision, USA

2023

Launch of T-type PressTo toolless mounting

Our Vision



To be the world's best in engineering for precision components.

Our Mission

To provide manufacturers with component solutions that improve their competitiveness.

Our Principles

- Gain total knowledge of our customers and their markets.
- Focus on identifying and creating high-volume component niches.
- Meet our customers' expectations with global consistency.
- Build long-term associations with customers, suppliers, colleagues and shareholders.
- Invest in the abilities of individuals at every level.
- Continuously enhance input efficiency and sustainability.
- Provide equal opportunities to all.

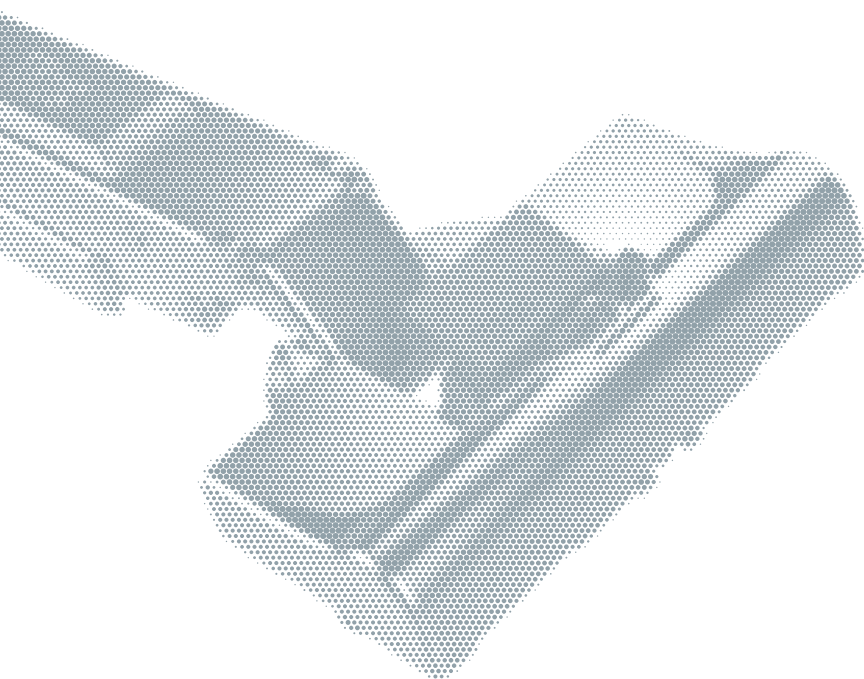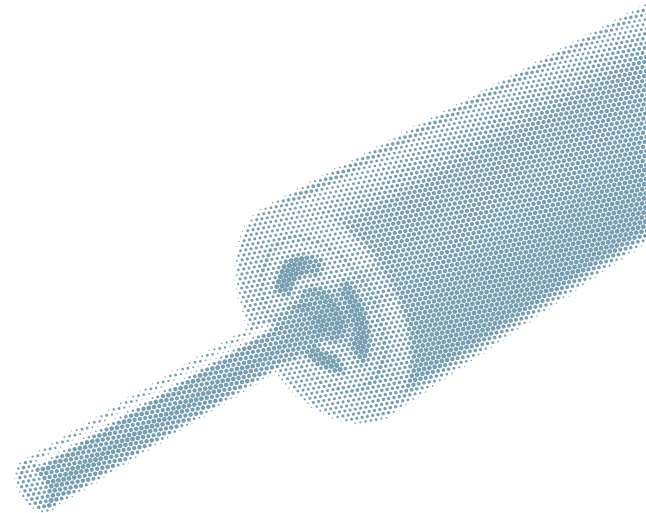

Product Groups

Cabinet Hardware

Cabinet connectors, concealed hinges, soft-close systems, kitchen drawers and accessories, RV hardware



Damping and Kinetics

Hydraulic dampers and Slidix soft-close systems for custom applications in home equipment



Titus Technologies

Automated assembly systems
Die casting technologies
Titusonic – Ultrasound fastening
FastFit insertion technology



Totally Integrated Engineering


At Titus, **Totally Integrated Engineering** means bringing together product design, proprietary manufacturing technologies, and fully controlled in-house operations into a single, seamless process. This integrated approach allows us to develop, produce, and deliver precision-engineered components that are consistent, reliable, and tailored to purpose.

It's not just about what we do – it's how we do it. By maintaining control across the entire development and production chain, we deliver measurable advantages to our customers: consistent product quality, faster time to market, and meaningful product benefits that lower total installed cost.

Our approach is guided by a set of core principles that define who we are and how we operate:


Manufacturing Operations

Fully controlled in-house operations
A wide range of proprietary technologies and services enabling high-volume production of precision components with consistency and speed.




Manufacturing Technologies

Process optimisation through proprietary innovation
Advanced manufacturing technologies that increase productivity, ensure repeatable quality, and support scalable growth.




Precision Components

Engineered for consistency, reliability, and purpose
Precision components designed to meet exacting performance standards – delivering built-in value from concept to final assembly.



Product Design

Component design for repeatable excellence
Unique components engineered for consistent quality, functional simplicity, and efficient integration into high-volume systems.



Engineered for Purpose

At **Titus Group**, engineering is never about excess. It's about intention. Every product, every feature, every process is developed with a clear purpose: to solve a real problem and deliver lasting value.

Engineered for Purpose is more than a slogan – it's our mindset.

It defines how we innovate, how we manufacture, and how we collaborate.

Focused on what matters

We don't follow trends for the sake of it. We listen to our customers, understand their needs, and deliver what works. Our solutions are built to perform in the real world – in real kitchens, real bedrooms, real production lines.

This focus allows us to eliminate unnecessary complexity and design components that are not only technically advanced, but also intuitive and dependable.

A solution provider, not just a manufacturer

We go beyond hardware. We work alongside our customers to co-create solutions that integrate seamlessly into their production processes and business models. From idea to implementation, we ensure speed, precision, and consistency — globally.

Whether it's:

- Developing smart connectors that tolerate drilling inaccuracies,
- Designing hinges that make tall doors align effortlessly, or
- Engineering soft-close systems that deliver just the right resistance,


... we always have a purpose in mind: to make furniture manufacturing easier, faster, and more competitive.

Built on experience. Proven by performance.

We apply decades of engineering knowledge across industries and markets, ensuring that our solutions are both reliable and scalable. Every new product is tested, refined, and validated to ensure that it performs consistently – across regions, materials, and applications.

Because to us, engineered for purpose means engineered for you.

Titus Group Companies Worldwide

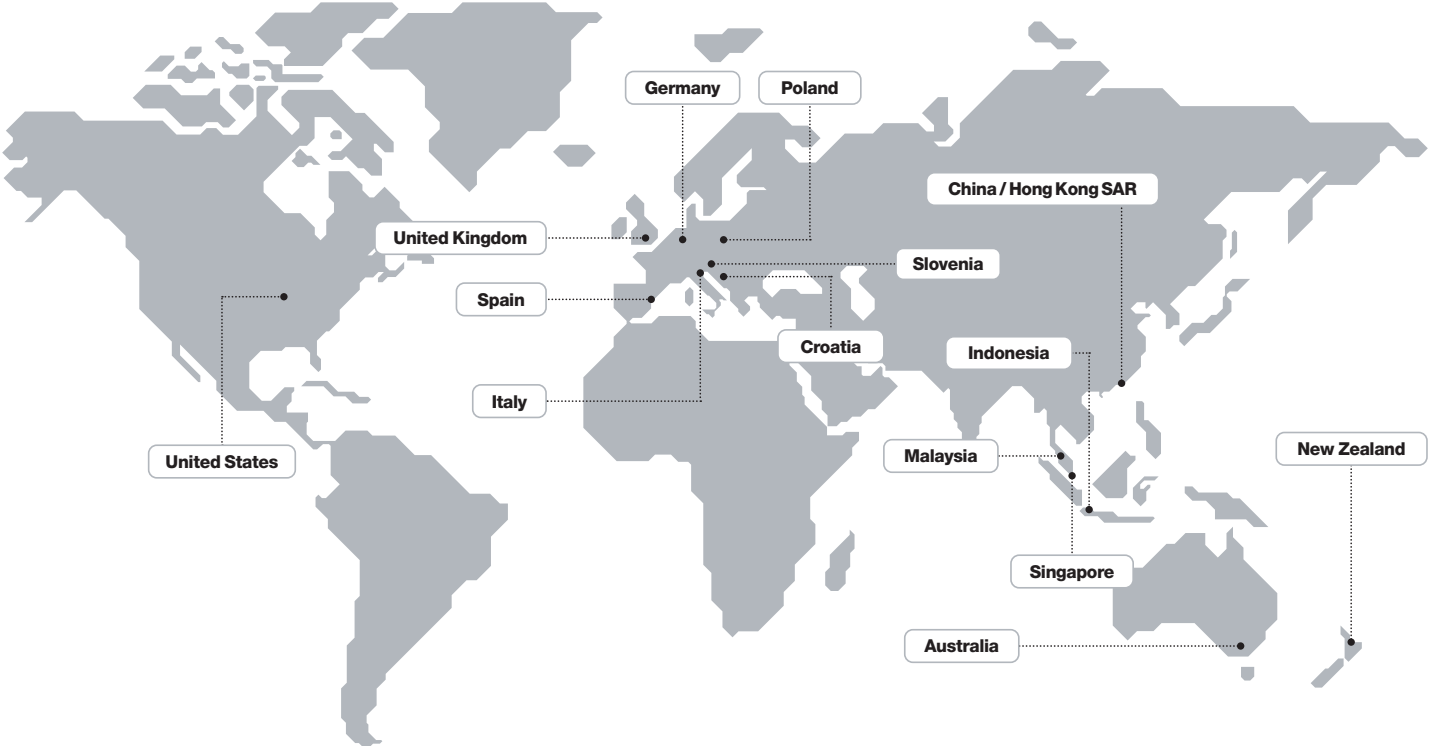

This map shows Titus Group companies only. For distribution partners, visit titusplus.com.

Engineered for Purpose

Titus is committed to providing its customers with products and services that improve their competitiveness, while reducing manufacturing and assembly costs.

Index

Item number	Page
00021	1.17
00022	1.17
00033	1.85
00180	1.10
00435	1.55
00436	1.55
01029	1.44
01373	1.84
01822	1.74
01823	1.74
01825	1.74
01828	1.74
01829	1.74
01837	1.74
01838	1.74
01843	1.74
01852	1.74
01910	1.76
01911	1.76
01912	1.75
01916	1.76
01924	1.73
01927	1.73
02075	1.12
02077	1.12
02107	1.18
02110	1.80
02111	1.80
02120	1.18
02130	1.18
02133	1.80
02139	1.18
02141	1.18
02144	1.18
02154	1.78
02161	1.17
02190	1.17
02193	1.17
02254	1.78
02523	1.84
02549	1.83
02558	1.81
02559	1.81
02560	1.81
02569	1.83
02570	1.83
02571	1.83
02574	1.83
02575	1.82
02578	1.84
02579	1.82
02582	1.82
02630	1.81

Item number	Page
02634	1.84
02642	1.82
02648	1.83
02653	1.83
02663	1.82
02666	1.83
02669	1.82
02671	1.82
02672	1.82
02699	1.83
02706	1.83
02710	1.84
03090	1.14
03118	1.14
03150	1.14
03168	1.14
03180	1.14
03181	1.14
05010	1.39
05050	1.32
05052	1.32
05072	1.36
05073	1.36
05078	1.36
05079	1.36
05087	1.36
05147	1.32
05270	1.32
05282	1.38
05314	1.31
05366	1.31
05380	1.37
05388	1.31
05409	1.68
05410	1.68
05414	1.33
05453	1.31
05474	1.31
05503	1.31
05552	1.32
05554	1.32
05556	1.32
05563	1.32
05574	1.43
05575	1.43
05576	1.43
05578	1.43
05579	1.43
05580	1.43
05592	1.37
05608	1.39
05609	1.39
05610	1.39

Item number	Page
05611	1.39
05751	1.37
05752	1.37
05753	1.37
05757	1.37
05772	1.37
05774	1.37
05775	1.37
05778	1.37
05857	1.37
05858	1.37
05859	1.37
05860	1.38
05917	1.69
05929	1.37
05960	1.69
05971	1.69
06073	1.12
06308	1.85
06309	1.85
06310	1.85
06343	1.55
06348	1.55
06381	1.54
06383	1.54
06385	1.54
06387	1.54
06395	1.52
06397	1.52
06401	1.48, 1.60
06402	1.48, 1.60
06403	1.48, 1.60
06405	1.48, 1.60
06406	1.48, 1.60
06408	1.47
06410	1.47
06411	1.50, 1.62
06412	1.50, 1.62
06413	1.49, 1.61
06414	1.49, 1.61
06415	1.50, 1.62
06416	1.49, 1.61
06431	1.51
06433	1.51
06435	1.51
06437	1.51
06439	1.52
06441	1.52
06443	1.52
06445	1.52
06447	1.51
06449	1.51
06451	1.51

Item number	Page
06453	1.51
06455	1.52
06457	1.52
06459	1.52
06461	1.52
06464	1.53
06465	1.53
06470	1.53
06471	1.53
06472	1.53
06473	1.53
06479	1.47
06495	1.48, 1.60
06576	1.59
06596	1.66
06598	1.66
06619	1.65
06620	1.65
06621	1.65
06622	1.65
06627	1.59
06629	1.59
06802	1.16
06803	1.16
06806	1.16
06839	1.16
06973	1.63
06975	1.63
06977	1.63
06979	1.63
06981	1.64
06983	1.64
06985	1.64
06987	1.64
09330	1.41
09332	1.40
09333	1.41
09334	1.41
09335	1.40
09336	1.40
09337	1.41
09406	1.42
09423	1.34
09424	1.34
09435	1.34
09443	1.34
09456	1.34
09491	1.42
09583	1.34
09588	1.34
09592	1.34
09594	1.34
09597	1.35

Index

Item number	Page
09631	1.42
09651	1.30
09652	1.30
09690	1.40
09692	1.40
09695	1.40
09699	1.40
241-0043-650	2.167
241-0050-650	2.167
242-0824-650	2.95
242-0885-650	2.93
242-0886-650	2.93
242-0924-650	2.133
242-0967-054	2.131
242-0968-054	2.131
242-0970-054	2.87
242-0971-054	2.87
242-0973-054	2.131
242-0974-054	2.131
242-0976-054	2.87
242-0977-054	2.87
242-0979-054	2.131
242-0980-054	2.131
242-0997-054	2.87
242-0998-054	2.87
242-OC27-650	2.135
242-OD14-650	2.135
242-OG76-650	2.95
242-OH17-650	2.95
242-OH34-650	2.133
242-OH48-650	2.137
242-OH49-650	2.137
242-OP81-650	2.95
242-OW48-650	2.91
242-OW71-650	2.89
242-OW72-650	2.89
242-OY45-650	2.97
242-OY46-650	2.97
242-OY48-650	2.139
242-OY49-650	2.139
244-0062-650	2.164
244-0063-650	2.164
244-0067-650	2.164
244-0085-650	2.126
244-0095-650	2.126
244-0118-050	2.126
244-0119-050	2.126
244-0120-050	2.126
244-0134-050	2.126
244-0135-050	2.126
244-0136-050	2.126
244-0137-050	2.126
244-0166-050	2.126

Item number	Page
244-0167-050	2.126
244-0175-650	2.164
244-0232-650	2.164
244-0258-050	2.124
244-0259-050	2.124
244-0260-050	2.124
244-0261-050	2.124
244-0262-050	2.124
244-0263-050	2.124
244-0264-050	2.124
244-0265-050	2.124
244-0266-050	2.124
244-0270-050	2.124
244-0271-050	2.124
244-0272-050	2.124
244-0342-050	2.124
244-0343-050	2.124
244-0344-050	2.124
244-0561-050	2.126
244-0562-050	2.126
244-0565-050	2.126
244-0566-050	2.126
244-0567-050	2.126
244-0568-050	2.126
244-0655-050	2.169
244-0810-650	2.139, 2.149
244-0813-650	2.149
244-0846-050	2.169
244-0848-650	2.167
244-0866-050	2.164
244-0867-050	2.164
244-0907-650	2.167
244-0914-650	2.164
244-0929-050	2.164
244-0930-050	2.164
244-0965-050	2.164
244-0B12-650	2.164
244-OC32-650	2.139, 2.149
244-OD46-650	2.167
244-OD47-650	2.167
244-OD99-650	2.167
244-OE02-650	2.167
244-OG19-050	2.164
244-OH64-050	2.164
244-OH65-050	2.164
244-OK95-050	2.164
244-OK96-050	2.164
244-OK97-650	2.164
244-OK98-650	2.164
244-OL26-050	2.164
244-OL29-050	2.164
244-OL37-650	2.164
244-OL38-650	2.164

Item number	Page
244-OL39-050	2.164
244-OL40-050	2.164
244-OL50-050	2.164
244-OL98-050	2.164
244-OM28-650	2.164
244-OM29-650	2.164
244-OM33-650	2.126
244-OP24-050	2.164
244-OP25-050	2.164
244-OP26-050	2.126
244-OP27-050	2.126
244-OP28-650	2.139, 2.149
244-OP29-650	2.126
244-OP41-650	2.164
244-OS65-050	2.164
244-OS66-050	2.164
244-OS67-050	2.164
244-OS68-050	2.164
244-OT14-650	2.164
244-OT28-050	2.164
244-OT40-050	2.164
244-OV19-050	2.126
244-OV50-050	2.166
244-OV64-050	2.164
244-OZ26-050	2.126
244-OZ51-050	2.126
244-OZ63-050	2.126
244-1136-050	2.126
244-1137-050	2.126
244-1138-050	2.126
244-1139-050	2.126
244-1228-050	2.126
244-1229-050	2.126
244-1233-050	2.126
244-1234-050	2.126
244-1645-050	2.126
244-3016-650	2.126
244-3651-650	2.126
244-3653-650	2.128
244-3654-650	2.128
244-3655-650	2.128
248-0080-050	2.103
248-0160-050	2.157
248-0161-05	2.157
248-0162-050	2.119
248-0163-050	2.119
248-0171-050	2.99
248-0172-050	2.99
248-0186-050	2.99
248-0188-050	2.99
248-0255-050	2.149
248-0279-050	2.99
248-0280-050	2.99

Item number	Page
248-0283-050	2.109
248-0285-050	2.109
248-0327-050	2.99
248-0328-050	2.99
248-0395-050	2.115
248-0431-050	2.109
248-0433-050	2.109
248-0482-050	2.99
248-0487-050	2.99
248-0532-050	2.99
248-0533-050	2.99
248-0534-050	2.99
248-0535-050	2.99
248-0536-050	2.99
248-0537-050	2.99
248-0545-050	2.99
248-0547-050	2.99
248-0665-050	2.107
248-0675-050	2.107
248-0742-050	2.111
248-0745-050	2.111
248-0AW6-050	2.115
248-0AW8-050	2.115
248-0AW9-050	2.115
248-0G49-050	2.141
248-0G50-050	2.141
248-0G51-050	2.141
248-0G52-050	2.143
248-0G53-050	2.149
248-0G54-050	2.141
248-0G55-050	2.141
248-0G56-050	2.141
248-0G57-050	2.143
248-0G58-050	2.149
248-0G79-050	2.141
248-0G80-050	2.141
248-0G81-050	2.141
248-0G82-050	2.143
248-0G83-050	2.149
248-OK10-050	2.169
248-OK40-050	2.141
248-OK76-050	2.141
248-OL04-050	2.141
248-OL27-650	2.145
248-OL28-050	2.147
248-OL32-650	2.145
248-OL33-050	2.147
248-OL46-050	2.147
248-OL51-050	2.155
248-OL61-050	2.111
248-OL70-050	2.147
248-OL71-050	2.145
248-OL72-050	2.143

Index

Item number	Page
248-0L73-050	2.149
248-0M41-050	2.169
248-0M73-050	2.117
248-0N12-050	2.107
248-0N13-050	2.107
248-0N16-050	2.109
248-0N17-050	2.109
248-0N20-050	2.109
248-0N21-050	2.109
248-0N24-050	2.111
248-0N25-050	2.111
248-0N38-050	2.145
248-0N62-050	2.111
248-0P43-050	2.155
248-0R09-050	2.169
248-0R10-050	2.155
248-0R12-050	2.155
248-0R13-050	2.117
248-0R14-050	2.117
248-0R17-050	2.117
248-0T80-050	2.159
248-0T81-050	2.159
248-0U13-050	2.159
248-0U14-050	2.159
248-0U16-050	2.121
248-0U21-050	2.121
248-0U22-050	2.121
248-0V14-050	2.101
248-0V15-050	2.121
248-0V18-050	2.105
248-0V39-050	2.101
248-0V41-050	2.101
248-0V42-050	2.101
248-0V45-050	2.105
248-0V47-050	2.105
248-0V48-050	2.105
248-0V62-050	2.103
248-0V66-050	2.149
248-1646	2.173
248-1712	2.173
248-4668	2.171
248-4672	2.171
275-4035	1.70
275-4058	1.70
277-4225	1.44
277-4355	1.44
279-9187	1.19
338-3686	1.75
338-3687	1.75
338-9721	1.75
353-3649	1.79
353-3650	1.79
360-1222	1.77

Item number	Page
360-1230	1.77
408-3166	1.70
408-3391	1.70
408-3423	1.70
408-3424	1.70
610-9099-040	4.11
610-9103-070-K1	4.13
610-9106-070-K1	4.13
610-9109-070-K1	4.13
610-9196-380	4.14
655-7273	3.31
655-7F01	3.29
655-7F02	3.29
655-7F03	3.29
655-7F04	3.29
655-7F05	3.29
655-7F06	3.29
655-7F07	3.29
655-7F08	3.29
655-7F09	3.29
655-7F10	3.29
655-7F12	3.29
655-7F30	3.29
655-7F40	3.29
655-7F50	3.29
655-7F60	3.29
655-7F70	3.29
655-7F80	3.29
655-7F90	3.29
655-7H01	3.30
655-7H02	3.30
655-7H03	3.30
655-7H04	3.30
655-7H05	3.30
655-7H06	3.30
655-7H07	3.30
655-7H08	3.30
655-7H09	3.30
655-7H10	3.30
655-7H12	3.30
655-7H30	3.30
655-7H40	3.30
655-7H50	3.30
655-7H60	3.30
655-7H70	3.30
655-7H80	3.30
655-7H90	3.30
655-7L01	3.29
655-7L02	3.29
655-7L03	3.29
655-7L04	3.29
655-7L05	3.29
655-7L06	3.29

Item number	Page
655-7L07	3.29
655-7L08	3.29
655-7L09	3.29
655-7L12	3.29
655-7L30	3.29
655-7L40	3.29
655-7L50	3.29
655-7L60	3.29
655-7L70	3.29
655-7L80	3.29
655-7L90	3.29
655-7M01	3.30
655-7M02	3.30
655-7M03	3.30
655-7M04	3.30
655-7M05	3.30
655-7M06	3.30
655-7M07	3.30
655-7M08	3.30
655-7M09	3.30
655-7M10	3.30
655-7M12	3.30
655-7M30	3.30
655-7M40	3.30
655-7M50	3.30
655-7M60	3.30
655-7M70	3.30
655-7M80	3.30
655-7M90	3.30
655-8046	3.31
655-8047	3.31
656-0H66-380-00	3.13, 3.15
656-0H67-380-00	3.17, 3.19
656-8048	3.21, 3.23, 3.25
656-8053	3.21, 3.23, 3.25
656-8126	3.23, 3.25
656-8132	3.23, 3.25
656-8334	3.21
656-8337	3.23
656-8341	3.25
656-8352	3.13
656-8353	3.13
656-8354	3.13
656-8356	3.13
656-8357	3.13
656-8358	3.13
656-8359	3.13
656-8360	3.15
656-8361	3.15
656-8362	3.15

Item number	Page
656-8363	3.15
656-8364	3.15
656-8365	3.15
656-8366	3.15
656-8367	3.17
656-8368	3.17
656-8369	3.17
656-8370	3.17
656-8371	3.17
656-8372	3.17
656-8373	3.17
656-8374	3.19
656-8375	3.19
656-8376	3.19
656-8377	3.19
656-8378	3.19
656-8379	3.19
656-8380	3.19
656-9339	3.28
656-9340	3.28
700-0KA0-054	2.80
700-0KA1-054	2.80
700-0KA2-054	2.80
700-0KA3-054	2.80
700-0KA4-054	2.80
700-0KB0-054	2.80
700-0KB1-054	2.80
700-0KB2-054	2.80
700-0KB3-054	2.80
700-0KB4-054	2.80
700-0KC0-054	2.80
700-0KC1-054	2.80
700-0KC2-054	2.80
700-0KC3-054	2.80
700-0KC4-054	2.80
700-0KF0-054	2.80
700-0KF1-054	2.80
700-0KF2-054	2.80
700-0KF3-054	2.80
700-0KF4-054	2.80
700-0KW0-650	2.84
700-0KW3-650	2.84
700-0KW6-650	2.84
700-0KWN-054	2.84
700-0LB0-650	2.80
700-0LB2-650	2.80
700-0LB3-650	2.80
700-0LC0-650	2.80
700-0LC2-650	2.80
700-0LC3-650	2.80
700-0LF0-650	2.80
700-0LF2-650	2.80
700-0LF3-650	2.80

Index

Item number	Page	Item number	Page	Item number	Page	Item number	Page
700-0NA0-054	2.82	701-OCT0-054	2.29	701-0GT6-054	2.49	702-0D83-650	2.59
700-0NA1-054	2.82	701-OCT1-054	2.29	701-0US0-054	2.41	702-0D87-650	2.59
700-0NA2-054	2.82	701-OCT4-054	2.29	701-0US1-054	2.41	702-0D89-650	2.59
700-0NA3-054	2.82	701-OCT6-054	2.29	701-0US4-054	2.41	702-0D97-650	2.59
700-0NA4-054	2.82	701-0D30-650	2.39	701-0UT0-054	2.41	702-0DK0-054	2.53
700-0NA9-650	2.82	701-0D32-650	2.39	701-0UT1-054	2.41	702-0DK1-054	2.53
700-0NB0-054	2.82	701-0D36-650	2.39	701-0UT4-054	2.41	702-0DK4-054	2.53
700-0NB1-054	2.82	701-0D38-650	2.39	701-0W59-650	2.37	702-0DK6-054	2.53
700-0NB2-054	2.82	701-0D64-650	2.31	701-0W60-650	2.37	702-0DL0-054	2.53
700-0NB3-054	2.82	701-0D66-650	2.31	701-0W62-650	2.37	702-0DL1-054	2.53
700-0NB4-054	2.82	701-0D70-650	2.31	701-0W63-650	2.37	702-0DL4-054	2.53
700-0NC0-054	2.82	701-0D72-650	2.31	701-0W65-650	2.37	702-0E18-650	2.59
700-0NC1-054	2.82	701-0D76-650	2.31	701-0W66-650	2.37	702-0E51-650	2.57
700-0NC2-054	2.82	701-0D78-650	2.31	702-0A95-650	2.61	702-0E53-650	2.57
700-0NC3-054	2.82	701-0D82-650	2.35	702-0A97-650	2.61	702-0E57-650	2.57
700-0NC4-054	2.82	701-0D84-650	2.35	702-0AK0-054	2.51	702-0E59-650	2.57
700-0NC9-650	2.82	701-0D88-650	2.35	702-0AK1-054	2.51	702-0E63-650	2.57
700-0NE0-054	2.82	701-0D90-650	2.35	702-0AK4-054	2.51	702-0E65-650	2.57
700-0NE1-054	2.82	701-0D98-650	2.35	702-0AK6-054	2.51	702-0EK0-054	2.73
700-0NE2-054	2.82	701-0DS0-054	2.29	702-0AL0-054	2.51	702-0EK1-054	2.73
700-0NE3-054	2.82	701-0DS1-054	2.29	702-0AL1-054	2.51	702-0EK4-054	2.73
700-0NE4-054	2.82	701-0DS4-054	2.29	702-0AL4-054	2.51	702-0ELO-054	2.73
700-0NF0-054	2.82	701-0DT0-054	2.29	702-0B07-650	2.59	702-0EL1-054	2.73
700-0NF1-054	2.82	701-0DT1-054	2.29	702-0B09-650	2.59	702-0EL4-054	2.73
700-0NF2-054	2.82	701-0DT4-054	2.29	702-0BK0-054	2.51	702-0FK0-054	2.75
700-0NF3-054	2.82	701-0DT6-054	2.29	702-0BK1-054	2.51	702-0FK1-054	2.75
700-0NF4-054	2.82	701-0E32-650	2.35	702-0BK4-054	2.51	702-0FK4-054	2.75
700-0NF9-650	2.82	701-0E52-650	2.33	702-0BK6-054	2.51	702-0FLO-054	2.75
701-0A96-650	2.39	701-0E54-650	2.33	702-0BL0-054	2.51	702-0FL1-054	2.75
701-0A98-650	2.39	701-0E58-650	2.33	702-0BL1-054	2.51	702-0FL4-054	2.75
701-0AS0-054	2.27	701-0E60-650	2.33	702-0BL4-054	2.51	702-0GK0-054	2.75
701-0AS1-054	2.27	701-0E64-650	2.33	702-0C53-650	2.59	702-0GK1-054	2.75
701-0AS4-054	2.27	701-0E66-650	2.33	702-0C55-650	2.59	702-0GK4-054	2.75
701-0AT0-054	2.27	701-0ES0-054	2.47	702-0C77-650	2.59	702-0GL0-054	2.75
701-0AT1-054	2.27	701-0ES1-054	2.47	702-0C79-650	2.59	702-0GL1-054	2.75
701-0AT4-054	2.27	701-0ES4-054	2.47	702-0CK0-054	2.53	702-0GL4-054	2.75
701-0AT6-054	2.27	701-0ET0-054	2.47	702-0CK1-054	2.53	702-0UK0-054	2.63
701-0B08-650	2.35	701-0ET1-054	2.47	702-0CK4-054	2.53	702-0UK1-054	2.63
701-0B10-650	2.35	701-0ET4-054	2.47	702-0CK6-054	2.53	702-0UK4-054	2.63
701-0BS0-054	2.27	701-0ET6-054	2.47	702-0CLO-054	2.53	702-0ULO-054	2.63
701-0BS1-054	2.27	701-0FS0-054	2.49	702-0CL1-054	2.53	702-0UL1-054	2.63
701-0BS4-054	2.27	701-0FS1-054	2.49	702-0CL4-054	2.53	702-0UL4-054	2.63
701-0BT0-054	2.27	701-0FS4-054	2.49	702-0D29-650	2.61	704-0553-054	2.69
701-0BT1-054	2.27	701-0FT0-054	2.49	702-0D31-650	2.61	704-0593-054	2.69
701-0BT4-054	2.27	701-0FT1-054	2.49	702-0D35-650	2.61	704-0595-054	2.71
701-0BT6-054	2.27	701-0FT4-054	2.49	702-0D37-650	2.61	704-0604-054	2.69
701-0C54-650	2.35	701-0FT6-054	2.49	702-0D63-650	2.55	704-0661-054	2.69
701-0C56-650	2.35	701-0GS0-054	2.49	702-0D65-650	2.55	704-0672-054	2.69
701-0C78-650	2.35	701-0GS1-054	2.49	702-0D69-650	2.55	704-0673-054	2.69
701-0C80-650	2.35	701-0GS4-054	2.49	702-0D71-650	2.55	704-0674-054	2.71
701-0CS0-054	2.29	701-0GT0-054	2.49	702-0D75-650	2.55	704-0697-054	2.71
701-0CS1-054	2.29	701-0GT1-054	2.49	702-0D77-650	2.55	707-0WK0-054	2.67
701-0CS4-054	2.29	701-0GT4-054	2.49	702-0D81-650	2.59	707-0WK1-054	2.67

Index

Item number	Page
707-OWK4-054	2.67
707-OWL0-054	2.67
707-OWL1-054	2.67
707-OWL4-054	2.67
707-OXK0-054	2.65
707-OXK1-054	2.65
707-OXK4-054	2.65
707-XML0-054	2.65
707-XML1-054	2.65
707-XML4-054	2.65
707-OYK0-054	2.65
707-OYK1-054	2.65
707-OYK4-054	2.65
707-OYL0-054	2.65
707-OYL1-054	2.65
707-OYL4-054	2.65
707-OZK0-054	2.67
707-OZK1-054	2.67
707-OZK4-054	2.67
707-OZL0-054	2.67
707-OZL1-054	2.67
707-OZL4-054	2.67
708-OWS0-054	2.45
708-OWS1-054	2.45
708-OWS4-054	2.45
708-OWT0-054	2.45
708-OWT1-054	2.45
708-OWT4-054	2.45
708-XXS0-054	2.43
708-XXS1-054	2.43
708-XXS4-054	2.43
708-XXT0-054	2.43
708-XXT1-054	2.43
708-XXT4-054	2.43
708-OYS0-054	2.43
708-OYS1-054	2.43
708-OYS4-054	2.43
708-OYT0-054	2.43
708-OYT1-054	2.43
708-OYT4-054	2.43
708-OZS0-054	2.45
708-OZS1-054	2.45
708-OZS4-054	2.45
708-OZT0-054	2.45
708-OZT1-054	2.45
708-OZT4-054	2.45
721-OPK0-650	2.77
721-OPK4-650	2.77
721-OPK6-650	2.77
721-OPL0-650	2.77
721-OPL4-650	2.77
728-1283	2.173
728-1284	2.173

Item number	Page
728-1286	2.173
728-1287	2.173
728-4669	2.171
729-OK71-054	2.183
820-6308-050	2.87, 2.89, 2.91, 2.93, 2.95, 2.97, 2.99, 2.101, 2.103, 2.105, 2.107, 2.109, 2.111, 2.115, 2.117, 2.119, 2.121, 2.131, 2.133, 2.135, 2.137, 2.139, 2.141, 2.143, 2.145, 2.147, 2.149, 2.155, 2.157, 2.159, 2.161, 2.167, 2.169
820-6328-050	1.77, 2.27, 2.29, 2.31, 2.33, 2.35, 2.37, 2.39, 2.41, 2.43, 2.45, 2.47, 2.49, 2.51, 2.53, 2.55, 2.57, 2.59, 2.61, 2.63, 2.65, 2.67, 2.69, 2.71, 2.73, 2.75, 2.77, 2.81, 2.83, 2.125, 2.127, 2.163, 2.193, 2.197, 2.199, 2.201, 2.203
820-6350-050	2.113, 2.151, 2.153
821-6304-050	2.125, 2.163
821-6323-050	2.125, 2.163, 2.193, 2.197, 2.199
821-6332-050	2.125, 2.163
915-0320	2.199
915-0D22	2.199
915-0D22-381-K1	2.199
915-0D22-381-K2	2.199
915-OW34	2.197
915-0X59	2.199
915-0X59-381-K1	2.199
915-0X59-381-K2	2.199
915-4175	2.199
915-4183	2.199
915-7159-050	2.199, 2.201, 2.203
915-7185	2.201
915-7186	2.203
915-7187	2.201
915-7188	2.203

Item number	Page
915-7190-050	2.199, 2.201, 2.203
915-7192	2.201
915-7193	2.203
915-7196-050	2.199, 2.201, 2.203
915-7199-050	2.199, 2.201, 2.203
915-9276	2.195
915-9277	2.193
915-9278	2.195
915-9900-072	2.195
926-0A26-050	2.161
926-0A27-050	2.161
950-0464-050	2.153
950-0465-050	2.153
950-0466-050	2.153
950-0T26-050	2.151
950-0T27-050	2.113
950-0T49-050	2.151
950-0T50-050	2.113
950-0T51-050	2.151
950-0T52-050	2.113
951-0D45-054	2.183
951-0F15-650	2.185
972-0420	2.187
972-0X19	2.189
972-0X34	2.189
972-4564	2.187
972-4565	2.187
972-4566	2.187
973-0M99	4.9
973-0M99-380-K1	4.9
973-0X35	4.5
973-0X35-380-K1	4.5
973-0X35-380-K2	4.5
973-0X39	4.7
973-0X39-380-K1	4.7
973-0X39-380-K2	4.7
973-0X95	4.7
973-4125	4.7
973-4126	4.7
973-4451	4.5, 4.9

Your authorized dealer