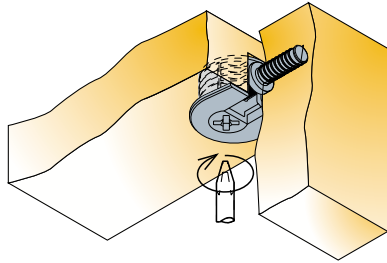# System 6
Flush 20mm Knock-in Housing
Non-outrigger

· A face-boring connector with the flush housing permits easy flat-pack transportation without panel damage
· Available for 19mm board thickness for drop-on and/or side-entry applications
· 'Klix' locking feature provides a strong vibration proof connection
· Compatible with all Sys6 screw-in and Quickfit dowels

Technical and mounting details	e	B Panel thickness	D Drilling depth	Item number	White plastic
Side-entry	9.5	19	14.2	06343 ⟶	877

Ø 20xD
22
1.5/45°
9.5

1000 Pcs — Housing made of plastic, cam made of zinc

	e	B Panel thickness	D Drilling depth	Item number	White plastic
Drop-on	9.5	19	14.2	06348 ⟶	877

Ø 20xD
22
1.5/45°
9.5

1000 Pcs — Housing made of plastic, cam made of zinc

Titus®