

Engineered for soft and silent push-opening of handleless cabinets

With the Push Latch S2, we are introducing a push-opening system for handleless cabinet doors with a noiseless, bounceless and soft opening action. It is compatible with damped and non-damped hinges, provides a consistent push-to-open action, and reliable door closing.





Second generation of Titus push-opening system

Smooth performance

Push Latch S2 incorporates a damping system which controls the outward motion triggered by a push, making the door opening decisive but still soft, silent, and bounceless. The door closing is confident, reliable, and always right first time.

Intuitive mounting

The positioning lip on the mounting plate assures accurate placement of the mechanism on the cabinet.

Safety assured

Push Latch S2 has an integrated safety feature, which allows the mechanism to easily detach from its mounting plate in case of an accidental hit. When the mechanism detaches, it can easily be reattached retaining its original performance.


Versatility


This mechanism is compatible with self-closing hinges with and without damping, and fits standard drilling patterns. With the use of an integrated and non-removable depth adjustment button, an optimal door-to-side panel gap can be achieved, ensuring consistent performance on different door sizes and weights.



Soft and silent

- Enhanced opening and closing performance controlled with an integrated damping system
- Bounceless and reliable door opening and closing

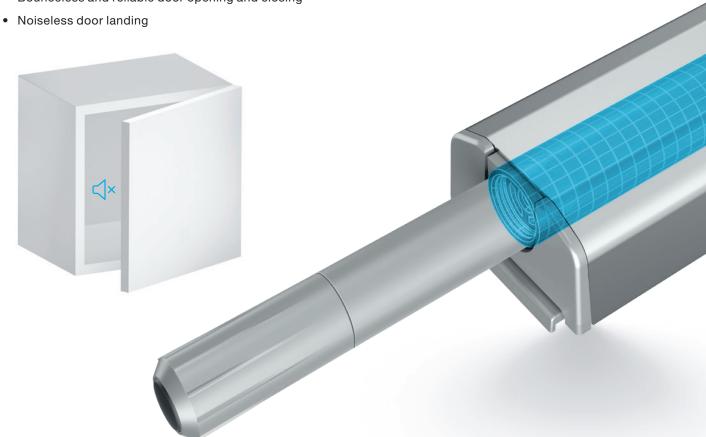


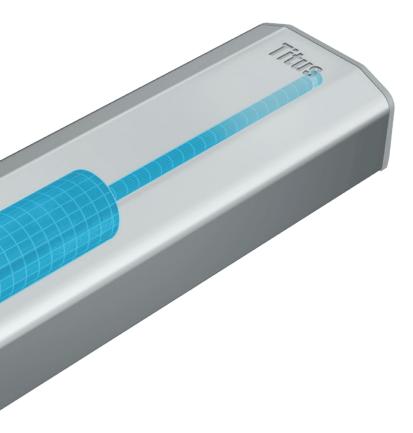



Titus hydraulic damping technology

The Push Latch S2 features Titus Damper Inside, our in-house engineered multipurpose damping technology. It ensures **force and performance consistency**, and a **fully controllable damping action**.

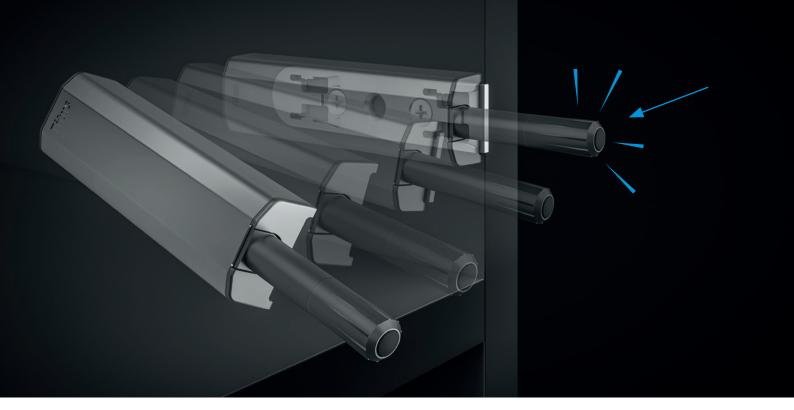




Safety detachment

- In case of an accidental hit, the mechanism detaches from the mounting plate
- The mechanism can be easily reattached
- Non-removable depth adjustment button adds to safety in use




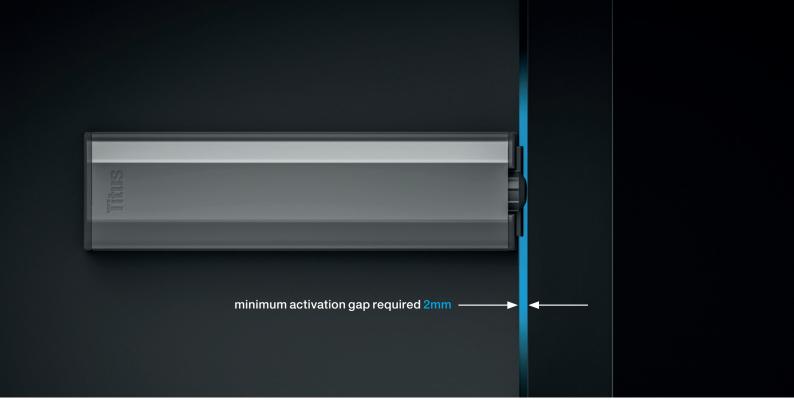



Depth adjustment

- With the depth adjustment button, the user can precisely define a door-to-side panel gap
- Consistent and reliable performance in all applications
- Enables evenly aligned cabinet fronts









Compatible with damped and non-damped hinges

- Versatile, simple and user-friendly
- Mounting plate with the postioning lip assures comfortable and accurate positioning
- Reliability and smooth performance assured

Positioning

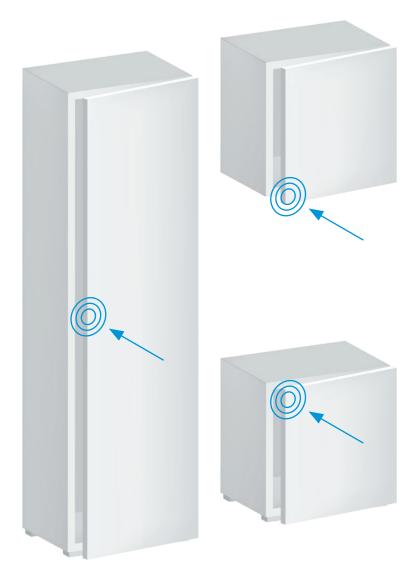


For optimal performance, the mechanism should be positioned near the 'touch opening point' on the cabinet side opposite the hinges.

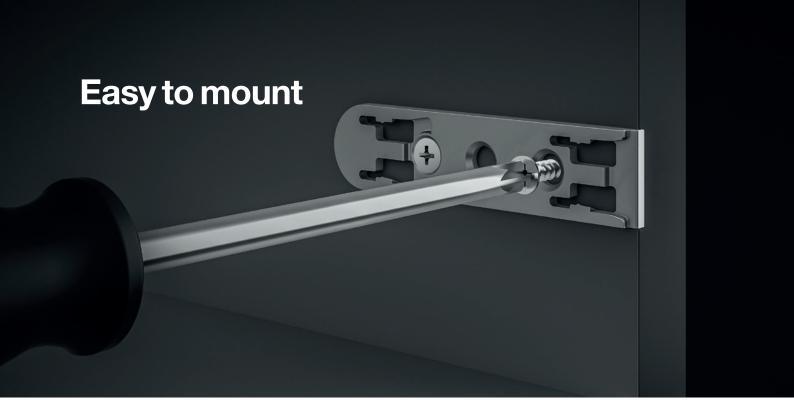

Mounting plate fixing

- The mounting plate fits standard 37mm and 20mm drilling patterns.
- If the cabinet side is not predrilled, the mounting plate's positioning lip can serve as a guide to ensure precise placement of the mechanism.






Push Latch mounting

Once the mounting plate is installed, the Push Latch S2 can be easily mounted.

- Place the Push Latch over the mounting plate.
- 2 Push it back to lock it into position. Once it clicks, the mechanism is correctly mounted.
- 3 Adjust the door-to-side panel gap through the adjustment button.



Engineered for Purpose

Titus is committed to providing its customers with products and services that improve their competitiveness, while reducing manufacturing and assembly costs.



Titus Group / titusplus.com